


| | | | | |
|--------|------------------------|----|--|------|
| 形名 | EL-LFV4711A AHJ (26N4) | 電源 | | ○諸特性 |
| 出力 | 固定出力 | 温度 | | |
| モード | | | | |
| オプション1 | | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | |
|----------------|------|-------------------|----------|----------|--|
| 光源 | | LDL40S-N/15/26-N4 | | | |
| 最大 取付 間隔 | 高さ | H | | | |
| | A-A' | 1.5 H | | | |
| | B-B' | 1.2 H | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | |
| | | 17.2% | 67.5% | 84.7% | |
| 保守率 | | 良い 0.810 | 普通 0.770 | 悪い 0.720 | |

○配光曲線図 (cd/1000lm)

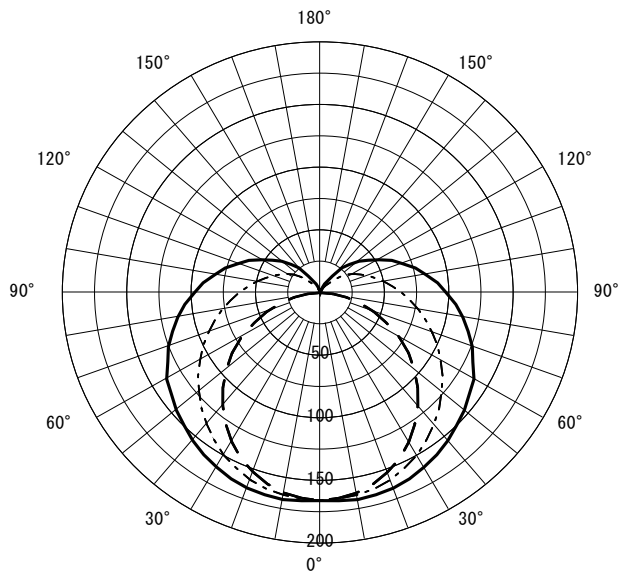

○直射水平面照度 (全光束: 2600 × 1 = 2600lm/台)

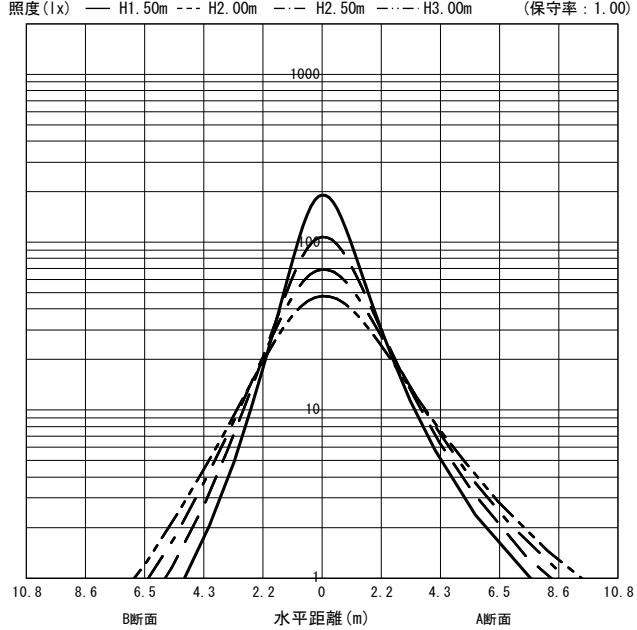

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 46 | 43 | 34 | 32 | 26 | 25 | 21 | 20 | 44 | 41 | 32 | 31 | 25 | 24 | 20 | 20 | 39 | 37 | 30 | 29 | 23 | 23 | 19 | 19 | 35 | 34 | 27 | 26 | 22 | 21 | 18 | 18 | 17 | 15 |
| 0.80 | 56 | 50 | 43 | 40 | 34 | 33 | 28 | 28 | 52 | 48 | 41 | 38 | 33 | 32 | 27 | 27 | 47 | 44 | 37 | 36 | 31 | 30 | 26 | 25 | 42 | 40 | 34 | 33 | 28 | 28 | 24 | 24 | 23 | 21 |
| 1.00 | 62 | 56 | 49 | 46 | 41 | 38 | 34 | 33 | 58 | 53 | 47 | 44 | 39 | 37 | 33 | 32 | 52 | 48 | 43 | 41 | 36 | 35 | 31 | 30 | 46 | 44 | 39 | 37 | 33 | 33 | 29 | 29 | 28 | 25 |
| 1.25 | 68 | 61 | 56 | 51 | 47 | 44 | 41 | 39 | 64 | 58 | 53 | 49 | 45 | 43 | 39 | 38 | 57 | 52 | 48 | 45 | 42 | 40 | 37 | 36 | 51 | 48 | 44 | 42 | 38 | 37 | 34 | 33 | 32 | 29 |
| 1.50 | 73 | 64 | 61 | 55 | 52 | 49 | 46 | 43 | 68 | 61 | 58 | 53 | 50 | 47 | 44 | 42 | 61 | 56 | 52 | 49 | 46 | 44 | 41 | 40 | 54 | 51 | 47 | 45 | 42 | 41 | 38 | 37 | 36 | 32 |
| 2.00 | 79 | 69 | 69 | 61 | 61 | 55 | 54 | 50 | 74 | 66 | 65 | 59 | 58 | 53 | 52 | 49 | 66 | 60 | 59 | 55 | 53 | 50 | 48 | 46 | 58 | 55 | 53 | 50 | 48 | 46 | 44 | 43 | 42 | 38 |
| 2.50 | 83 | 72 | 74 | 65 | 66 | 60 | 60 | 55 | 78 | 69 | 70 | 63 | 63 | 58 | 58 | 53 | 69 | 63 | 63 | 58 | 58 | 54 | 53 | 50 | 61 | 58 | 56 | 54 | 52 | 50 | 49 | 47 | 45 | 41 |
| 3.00 | 87 | 74 | 78 | 68 | 71 | 63 | 65 | 59 | 81 | 71 | 74 | 66 | 68 | 61 | 62 | 57 | 72 | 65 | 66 | 61 | 61 | 57 | 54 | 64 | 60 | 59 | 56 | 55 | 53 | 52 | 50 | 49 | 44 | |
| 4.00 | 91 | 77 | 84 | 72 | 77 | 68 | 72 | 64 | 85 | 74 | 79 | 70 | 74 | 66 | 69 | 62 | 75 | 68 | 71 | 65 | 66 | 61 | 63 | 58 | 67 | 63 | 63 | 60 | 60 | 57 | 57 | 55 | 53 | 48 |
| 5.00 | 93 | 79 | 87 | 75 | 82 | 71 | 77 | 68 | 88 | 76 | 82 | 72 | 78 | 69 | 73 | 66 | 78 | 70 | 74 | 67 | 70 | 64 | 66 | 61 | 69 | 65 | 66 | 62 | 63 | 60 | 60 | 58 | 56 | 51 |
| 7.00 | 97 | 81 | 92 | 78 | 87 | 75 | 83 | 72 | 91 | 78 | 87 | 75 | 83 | 73 | 79 | 70 | 80 | 72 | 77 | 70 | 74 | 68 | 71 | 66 | 71 | 67 | 69 | 65 | 67 | 63 | 64 | 61 | 59 | 55 |
| 10.00 | 99 | 83 | 96 | 81 | 92 | 78 | 89 | 76 | 93 | 80 | 90 | 78 | 87 | 76 | 84 | 74 | 83 | 74 | 80 | 73 | 78 | 71 | 76 | 69 | 73 | 69 | 72 | 67 | 70 | 66 | 68 | 65 | 62 | 58 |

JIS C 8030:2014

三菱電機照明株式会社