


|        |                        |    |  |      |
|--------|------------------------|----|--|------|
| 形名     | EL-LFV4711A AHJ(34N3A) | 電源 |  | ○諸特性 |
| 出力     | 固定出力                   | 温度 |  |      |
| モード    |                        |    |  |      |
| オプション1 |                        |    |  |      |
| オプション2 |                        |    |  |      |
| オプション3 |                        |    |  |      |
| オプション4 |                        |    |  |      |
| オプション5 |                        |    |  |      |




|                |      |                   |       |       |       |    |       |
|----------------|------|-------------------|-------|-------|-------|----|-------|
| 光源             |      | LDL40S-N/21/34-N3 |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                 |       |       |       |    |       |
|                | A-A' | 1.5 H             |       |       |       |    |       |
|                | B-B' | 1.2 H             |       |       |       |    |       |
| 器具効率           |      | 上方光束              | 下方光束  | 計     |       |    |       |
|                |      | 17.2%             | 67.5% | 84.7% |       |    |       |
| 保守率            |      | 良い                | 0.810 | 普通    | 0.770 | 悪い | 0.720 |

○配光曲線図 (cd/1000lm)

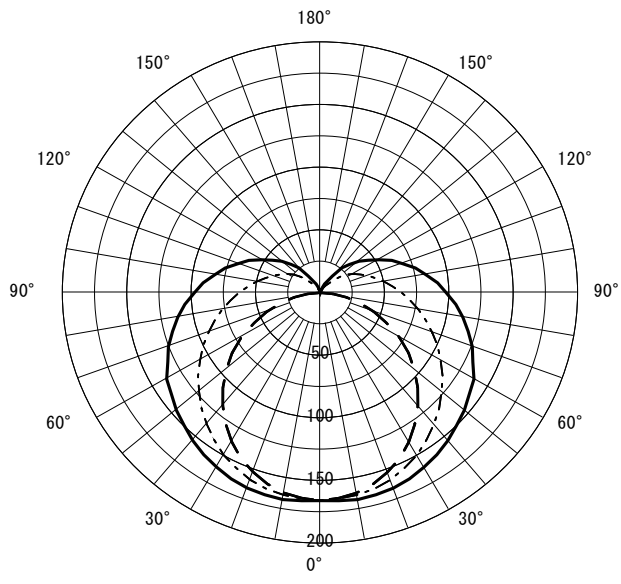

○直射水平面照度 (全光束: 3400 × 1 = 3400lm/台)

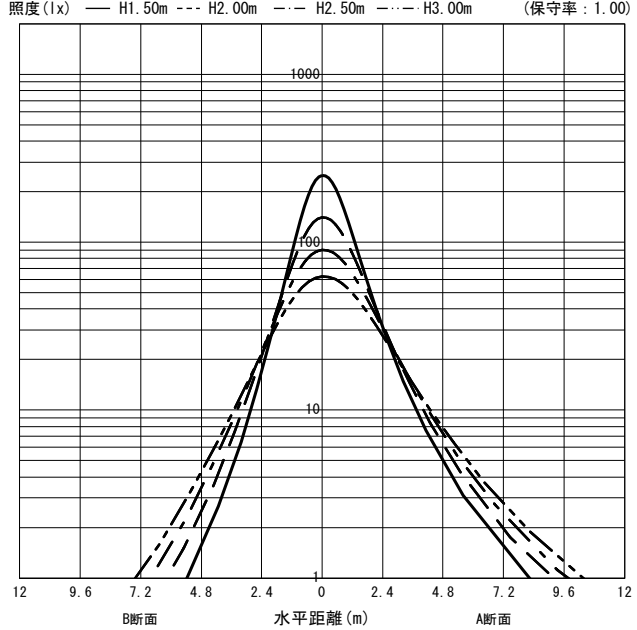

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 天井      | 80              |    |    |    |    |    |    |    | 70 |    |    |    |    |    |    |    | 50 |    |    |    |    |    |    |    | 30 |    |    |    |    |    |    |    | 20 | 0  |    |    |    |    |    |    |    |   |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |   |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| 室指数     | 作業面照明率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
| 0.60    | 46              | 43 | 34 | 32 | 26 | 25 | 21 | 20 | 44 | 41 | 32 | 31 | 25 | 24 | 20 | 20 | 39 | 37 | 30 | 29 | 23 | 23 | 19 | 19 | 35 | 34 | 27 | 26 | 22 | 21 | 18 | 18 | 17 | 15 |    |    |    |    |    |    |    |   |
| 0.80    | 56              | 50 | 43 | 40 | 34 | 33 | 28 | 28 | 52 | 48 | 41 | 38 | 33 | 32 | 27 | 27 | 47 | 44 | 37 | 36 | 31 | 30 | 26 | 25 | 42 | 40 | 34 | 33 | 28 | 28 | 24 | 24 | 23 | 21 |    |    |    |    |    |    |    |   |
| 1.00    | 62              | 56 | 49 | 46 | 41 | 38 | 34 | 33 | 58 | 53 | 47 | 44 | 39 | 37 | 33 | 32 | 52 | 48 | 43 | 41 | 36 | 35 | 31 | 30 | 46 | 44 | 39 | 37 | 33 | 33 | 29 | 29 | 28 | 25 |    |    |    |    |    |    |    |   |
| 1.25    | 68              | 61 | 56 | 51 | 47 | 44 | 41 | 39 | 64 | 58 | 53 | 49 | 45 | 43 | 39 | 38 | 57 | 52 | 48 | 45 | 42 | 40 | 37 | 36 | 51 | 48 | 44 | 42 | 38 | 37 | 34 | 33 | 32 | 29 |    |    |    |    |    |    |    |   |
| 1.50    | 73              | 64 | 61 | 55 | 52 | 49 | 46 | 43 | 68 | 61 | 58 | 53 | 50 | 47 | 44 | 42 | 61 | 56 | 52 | 49 | 46 | 44 | 41 | 40 | 54 | 51 | 47 | 45 | 42 | 41 | 38 | 37 | 36 | 32 |    |    |    |    |    |    |    |   |
| 2.00    | 79              | 69 | 69 | 61 | 61 | 55 | 54 | 50 | 74 | 66 | 65 | 59 | 58 | 53 | 52 | 49 | 66 | 60 | 59 | 55 | 53 | 50 | 48 | 46 | 58 | 55 | 53 | 50 | 48 | 46 | 44 | 43 | 42 | 38 |    |    |    |    |    |    |    |   |
| 2.50    | 83              | 72 | 74 | 65 | 66 | 60 | 60 | 55 | 78 | 69 | 70 | 63 | 63 | 58 | 58 | 53 | 69 | 63 | 63 | 58 | 58 | 54 | 53 | 50 | 61 | 58 | 56 | 54 | 52 | 50 | 49 | 47 | 45 | 41 |    |    |    |    |    |    |    |   |
| 3.00    | 87              | 74 | 78 | 68 | 71 | 63 | 65 | 59 | 81 | 71 | 74 | 66 | 68 | 61 | 62 | 57 | 72 | 65 | 66 | 61 | 61 | 57 | 57 | 54 | 64 | 60 | 59 | 56 | 55 | 53 | 52 | 50 | 49 | 44 |    |    |    |    |    |    |    |   |
| 4.00    | 91              | 77 | 84 | 72 | 77 | 68 | 72 | 64 | 85 | 74 | 79 | 70 | 74 | 66 | 69 | 62 | 75 | 68 | 71 | 65 | 66 | 61 | 63 | 58 | 67 | 63 | 63 | 60 | 60 | 57 | 57 | 55 | 53 | 48 |    |    |    |    |    |    |    |   |
| 5.00    | 93              | 79 | 87 | 75 | 82 | 71 | 77 | 68 | 88 | 76 | 82 | 72 | 78 | 69 | 73 | 66 | 78 | 70 | 74 | 67 | 70 | 64 | 66 | 61 | 69 | 65 | 66 | 62 | 63 | 60 | 60 | 58 | 56 | 51 |    |    |    |    |    |    |    |   |
| 7.00    | 97              | 81 | 92 | 78 | 87 | 75 | 83 | 72 | 91 | 78 | 87 | 75 | 83 | 73 | 79 | 70 | 80 | 72 | 77 | 70 | 74 | 68 | 71 | 66 | 71 | 67 | 69 | 65 | 67 | 63 | 64 | 61 | 59 | 55 |    |    |    |    |    |    |    |   |
| 10.00   | 99              | 83 | 96 | 81 | 92 | 78 | 89 | 76 | 93 | 80 | 90 | 78 | 87 | 76 | 84 | 74 | 83 | 74 | 80 | 73 | 78 | 71 | 76 | 69 | 73 | 69 | 72 | 67 | 70 | 66 | 68 | 65 | 62 | 58 |    |    |    |    |    |    |    |   |

JIS C 8030:2014

三菱電機照明株式会社