


EL-LFVH4091H AHJ(25G3)


AHJ



○諸特性


光源		FHF32EX-N-H(非常灯)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.62m	2.17m	2.72m	3.26m	
	B-B	2.07m	2.57m	3.15m	3.73m	
器具効率	上方光束	下方光束		計		
	18.7%	52.3%		71.0%		
保守率	良い	0.690	普通	0.650	悪い	0.610

○配光曲線図 (cd/1000lm)

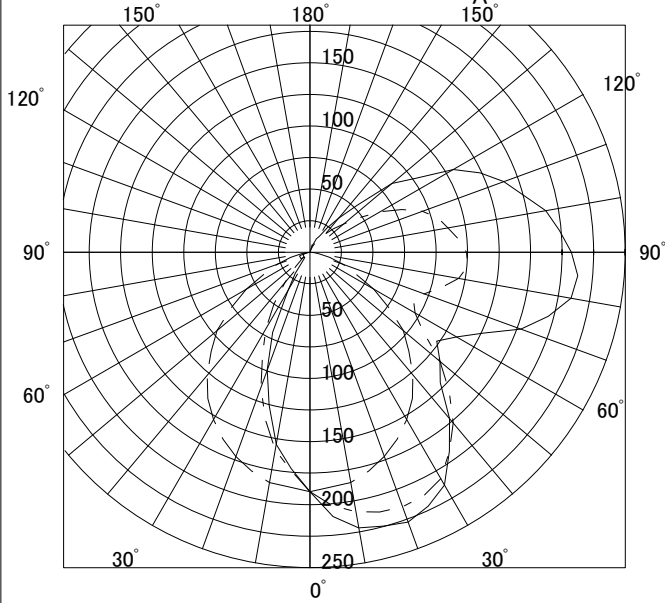

○直射水平面照度

(ランプ光束: 3520 × 1 = 3520lm/台)

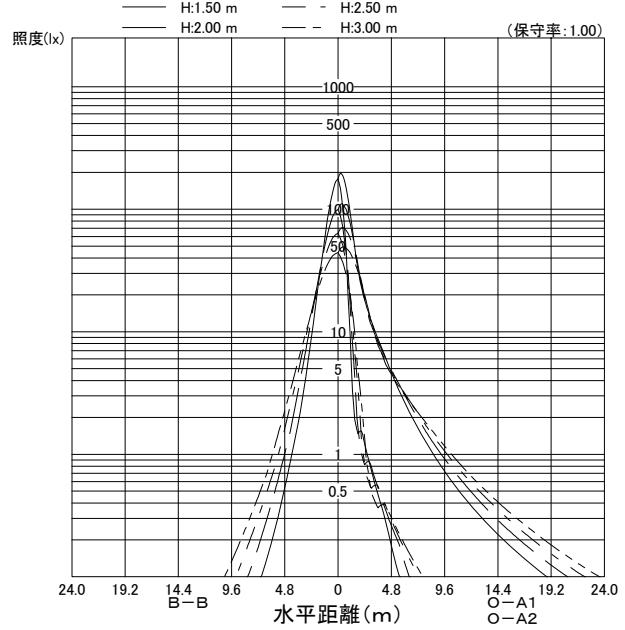

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	41	48	53	58	61	66	70	72	75	78	80	82
		10	29	38	43	47	52	54	58	60	62	64	66	67	69
	50	30	22	31	37	43	48	52	58	62	65	70	72	76	79
		10	21	30	35	40	44	47	52	55	57	60	62	65	67
70	30	30	17	25	30	36	41	45	51	56	59	64	68	72	76
		10	16	24	29	34	39	42	47	50	53	57	59	62	65
	10	10	13	21	25	30	34	37	43	47	49	53	56	60	63
		70	29	39	45	50	54	57	62	65	67	70	72	75	77
50	50	30	21	30	35	40	46	49	55	59	61	65	68	71	74
		10	20	29	33	38	42	45	49	53	55	58	60	62	64
	30	30	16	24	29	34	39	43	49	53	56	61	64	68	71
		10	16	24	28	33	37	40	45	48	51	54	57	60	62
30	50	30	19	27	32	36	41	44	48	52	54	58	60	63	65
		10	18	26	31	35	39	41	45	48	50	53	54	57	59
	30	30	15	23	27	31	36	39	44	48	50	54	57	60	63
		10	15	22	26	30	34	37	41	45	47	50	52	55	57
0	30	10	12	19	23	27	31	34	38	42	44	47	50	53	56
		10	10	12	19	23	27	31	34	38	42	44	47	50	53
	10	30	14	21	25	29	33	35	39	43	45	48	50	53	55
		10	13	20	24	28	32	34	38	41	43	46	48	50	52
0	10	11	18	21	25	29	31	35	38	41	44	46	49	51	
	0	9	15	18	21	25	27	30	33	35	38	40	42	44	