


形名	EL-LFY4562A AHX (25N5)	電源		○諸特性
出力	連調単色	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDL40S-N/17/25-N5					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		1.0%	67.7%	68.7%			
保守率		良い	0.770	普通	0.720	悪い	0.680

○配光曲線図 (cd/1000lm)

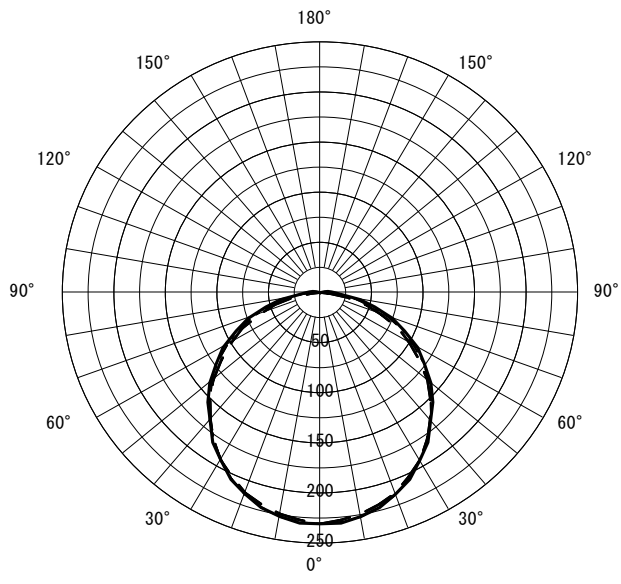

○直射水平面照度 (全光束: 2500 × 2 = 5000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率: 1.00)

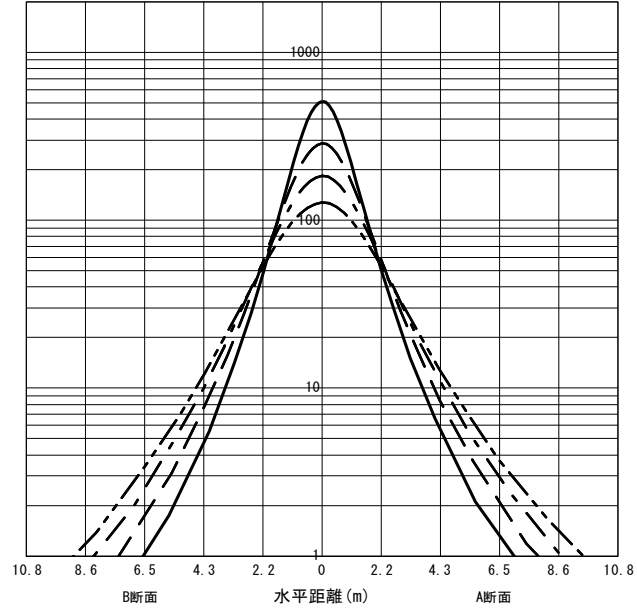

反射率 (%)																																				
天井	80								70								50								30								20	0		
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																			
0.60	42	39	32	31	26	25	22	21	41	38	32	30	26	25	22	21	39	36	31	29	25	25	22	21	37	35	30	29	25	24	21	21	21	20		
0.80	50	46	40	38	34	32	29	29	49	45	40	37	33	32	29	28	46	43	38	36	33	32	29	28	43	41	37	35	32	31	28	28	28	26		
1.00	56	50	46	43	40	38	35	34	54	49	45	42	39	37	35	33	51	47	43	41	38	37	34	33	48	45	42	40	37	36	33	33	33	31		
1.25	61	54	52	48	46	43	41	39	59	53	51	47	45	42	40	39	55	51	48	46	43	41	39	38	52	49	46	44	42	41	38	38	38	36		
1.50	65	57	56	51	50	46	45	43	63	56	55	50	49	46	45	42	59	54	52	49	47	45	43	42	55	52	50	48	46	44	42	41	41	40		
2.00	70	61	63	56	57	52	52	48	68	60	61	55	56	51	51	48	63	58	58	54	53	50	50	47	59	56	55	52	51	49	48	47	46	45		
2.50	74	64	67	59	62	55	57	52	71	62	65	58	60	55	56	52	66	60	61	57	57	54	54	51	62	58	58	55	55	53	52	50	50	48		
3.00	76	65	70	61	65	58	61	55	73	64	68	61	64	57	60	55	68	62	64	59	60	56	57	54	64	60	60	57	58	55	55	53	53	51		
4.00	79	67	74	64	70	62	67	59	76	66	72	64	68	61	65	59	71	64	68	62	65	60	62	58	66	62	64	60	61	58	59	57	56	55		
5.00	81	69	77	66	74	64	70	62	78	68	75	65	71	63	68	61	73	66	70	64	67	62	65	60	68	64	66	62	64	60	62	59	58	57		
7.00	84	70	80	68	78	67	75	65	80	69	78	68	75	66	73	64	75	67	72	66	70	64	69	63	70	65	68	64	66	63	65	62	61	60		
10.00	85	72	83	70	81	69	79	68	82	70	80	69	78	68	76	67	76	69	75	67	73	66	72	65	71	67	70	66	69	65	68	64	63	62		

JIS C 8030:2014

三菱電機照明株式会社