


|        |                        |    |  |      |
|--------|------------------------|----|--|------|
| 形名     | EL-LFY4563A AHX (25N5) | 電源 |  | ○諸特性 |
| 出力     | 連調単色                   | 温度 |  |      |
| モード    |                        |    |  |      |
| オプション1 |                        |    |  |      |
| オプション2 |                        |    |  |      |
| オプション3 |                        |    |  |      |
| オプション4 |                        |    |  |      |
| オプション5 |                        |    |  |      |




|                |      |                    |       |       |       |    |       |
|----------------|------|--------------------|-------|-------|-------|----|-------|
| 光源             |      | LDL40S-WW/17/23-N4 |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                  |       |       |       |    |       |
|                | A-A' | 1.3 H              |       |       |       |    |       |
|                | B-B' | 1.3 H              |       |       |       |    |       |
| 器具効率           |      | 上方光束               | 下方光束  | 計     |       |    |       |
|                |      | 1.0%               | 67.7% | 68.7% |       |    |       |
| 保守率            |      | 良い                 | 0.770 | 普通    | 0.720 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

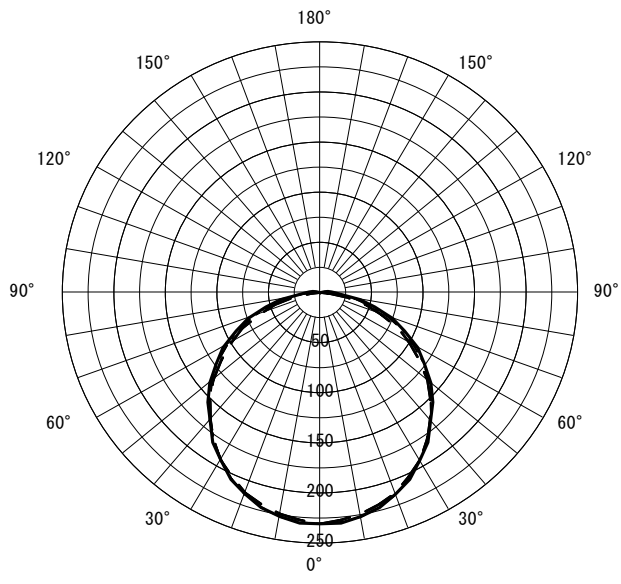

○直射水平面照度 (全光束: 2300 × 3 = 6900lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

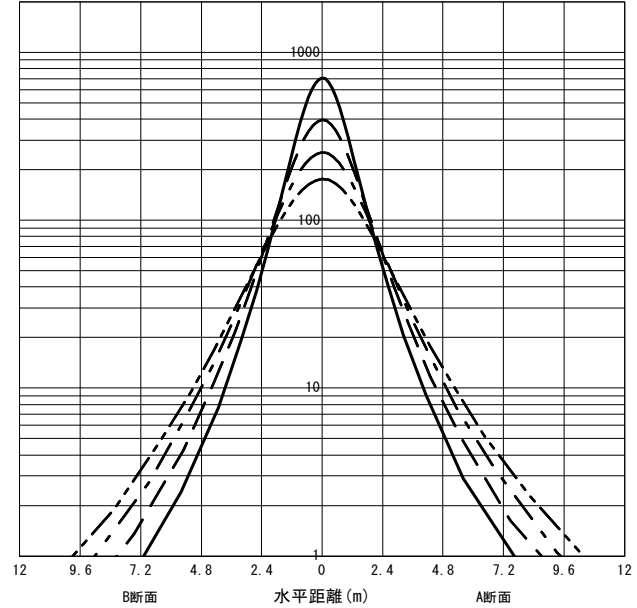

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井      | 80              |    |    |    | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 20 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |    |
| 室指数     | 作業面照明率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.60    | 42              | 39 | 32 | 31 | 26 | 25 | 22 | 21 | 41 | 38 | 32 | 30 | 26 | 25 | 22 | 21 | 39 | 36 | 31 | 29 | 25 | 25 | 22 | 21 | 37 | 35 | 30 | 29 | 25 | 24 | 21 | 21 | 21 | 20 |
| 0.80    | 50              | 46 | 40 | 38 | 34 | 32 | 29 | 29 | 49 | 45 | 40 | 37 | 33 | 32 | 29 | 28 | 46 | 43 | 38 | 36 | 33 | 32 | 29 | 28 | 43 | 41 | 37 | 35 | 32 | 31 | 28 | 28 | 28 | 26 |
| 1.00    | 56              | 50 | 46 | 43 | 40 | 38 | 35 | 34 | 54 | 49 | 45 | 42 | 39 | 37 | 35 | 33 | 51 | 47 | 43 | 41 | 38 | 37 | 34 | 33 | 48 | 45 | 42 | 40 | 37 | 36 | 33 | 33 | 33 | 31 |
| 1.25    | 61              | 54 | 52 | 48 | 46 | 43 | 41 | 39 | 59 | 53 | 51 | 47 | 45 | 42 | 40 | 39 | 55 | 51 | 48 | 46 | 43 | 41 | 39 | 38 | 52 | 49 | 46 | 44 | 42 | 41 | 38 | 38 | 38 | 36 |
| 1.50    | 65              | 57 | 56 | 51 | 50 | 46 | 45 | 43 | 63 | 56 | 55 | 50 | 49 | 46 | 45 | 42 | 59 | 54 | 52 | 49 | 47 | 45 | 43 | 42 | 55 | 52 | 50 | 48 | 46 | 44 | 42 | 41 | 41 | 40 |
| 2.00    | 70              | 61 | 63 | 56 | 57 | 52 | 52 | 48 | 68 | 60 | 61 | 55 | 56 | 51 | 51 | 48 | 63 | 58 | 58 | 54 | 53 | 50 | 50 | 47 | 59 | 56 | 55 | 52 | 51 | 49 | 48 | 47 | 46 | 45 |
| 2.50    | 74              | 64 | 67 | 59 | 62 | 55 | 57 | 52 | 71 | 62 | 65 | 58 | 60 | 55 | 56 | 52 | 66 | 60 | 61 | 57 | 57 | 54 | 54 | 51 | 62 | 58 | 58 | 55 | 55 | 53 | 52 | 50 | 50 | 48 |
| 3.00    | 76              | 65 | 70 | 61 | 65 | 58 | 61 | 55 | 73 | 64 | 68 | 61 | 64 | 57 | 60 | 55 | 68 | 62 | 64 | 59 | 60 | 56 | 57 | 54 | 64 | 60 | 60 | 57 | 58 | 55 | 55 | 53 | 53 | 51 |
| 4.00    | 79              | 67 | 74 | 64 | 70 | 62 | 67 | 59 | 76 | 66 | 72 | 64 | 68 | 61 | 65 | 59 | 71 | 64 | 68 | 62 | 65 | 60 | 62 | 58 | 66 | 62 | 64 | 60 | 61 | 58 | 59 | 57 | 56 | 55 |
| 5.00    | 81              | 69 | 77 | 66 | 74 | 64 | 70 | 62 | 78 | 68 | 75 | 65 | 71 | 63 | 68 | 61 | 73 | 66 | 70 | 64 | 67 | 62 | 65 | 60 | 68 | 64 | 66 | 62 | 64 | 60 | 62 | 59 | 58 | 57 |
| 7.00    | 84              | 70 | 80 | 68 | 78 | 67 | 75 | 65 | 80 | 69 | 78 | 68 | 75 | 66 | 73 | 64 | 75 | 67 | 72 | 66 | 70 | 64 | 69 | 63 | 70 | 65 | 68 | 64 | 66 | 63 | 65 | 62 | 61 | 60 |
| 10.00   | 85              | 72 | 83 | 70 | 81 | 69 | 79 | 68 | 82 | 70 | 80 | 69 | 78 | 68 | 76 | 67 | 76 | 69 | 75 | 67 | 73 | 66 | 72 | 65 | 71 | 67 | 70 | 66 | 69 | 65 | 68 | 64 | 63 | 62 |

JIS C 8030:2014

三菱電機照明株式会社