


EL-LKL4931B AHX(25N5)	
	AHX


○諸特性

光源		LDL40S・N/17/25・N5				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.08m	2.73m	3.40m	4.06m	
	B-B	2.11m	2.64m	3.22m	3.81m	
器具効率	上方光束	下方光束		計		
		17.6%	82.3%	99.9%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

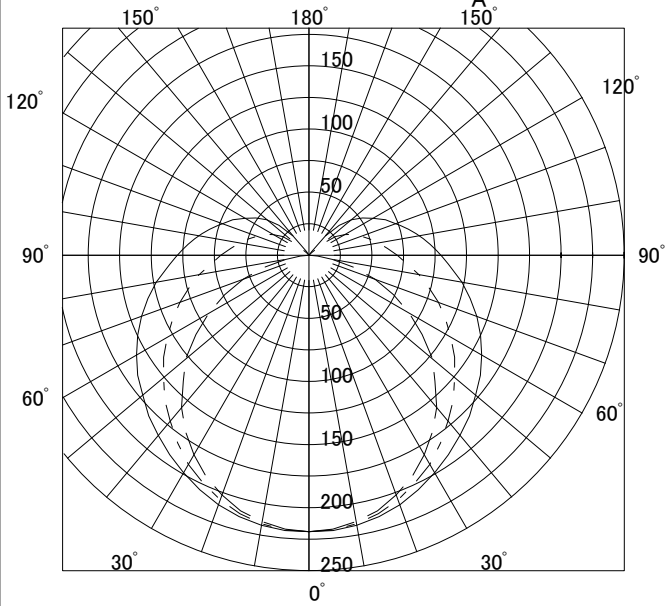

○直射水平面照度

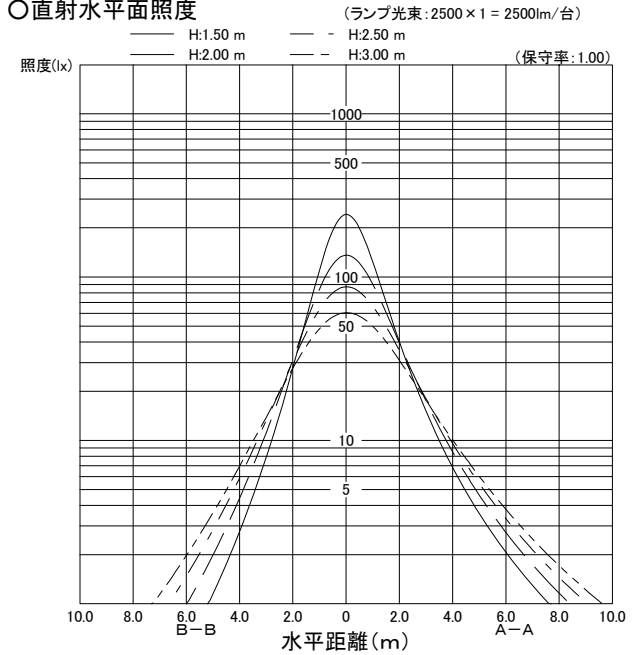

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	41	56	66	74	81	87	94	100	103	108	111	115	118
		10	39	52	60	66	72	76	82	86	89	92	94	97	99
	50	30	28	41	50	59	67	73	82	89	93	100	104	110	114
		10	27	39	47	54	61	66	73	78	82	86	89	93	96
70	30	30	21	32	41	48	57	63	72	80	85	92	98	104	110
		10	20	31	39	46	53	58	66	72	76	81	85	90	93
	10	30	16	26	33	40	47	52	60	66	70	77	81	86	91
		10	16	26	33	40	47	52	60	66	70	77	81	86	91
50	70	30	39	53	62	70	77	82	89	94	97	102	105	109	112
		10	37	49	57	63	69	73	79	83	85	89	91	94	96
	50	30	27	40	48	56	64	70	78	84	89	95	99	104	108
		10	26	38	46	52	59	64	71	76	79	84	87	90	93
30	30	30	20	31	39	47	55	60	69	76	81	88	93	99	104
		10	20	31	38	45	52	56	64	70	73	79	83	87	91
	10	30	15	25	32	39	46	50	58	64	69	75	79	84	88
		10	15	25	32	39	46	50	58	64	69	75	79	84	88
0	50	30	25	37	45	51	59	63	71	76	80	85	89	93	97
		10	24	35	42	49	55	59	66	71	74	78	81	84	87
	30	30	19	30	37	44	51	56	64	70	74	80	84	90	94
		10	18	29	36	42	49	53	60	66	69	74	78	82	85
0	30	30	14	24	30	37	43	48	55	61	65	71	74	79	83
		10	14	24	30	37	43	48	55	61	65	71	74	79	83
	10	30	18	28	34	41	47	52	59	64	68	73	77	81	85
		10	17	27	33	40	46	50	57	62	65	70	73	77	80
0	10	30	14	23	29	35	41	45	52	58	61	67	70	75	78
		10	14	23	29	35	41	45	52	58	61	67	70	75	78
0	0	30	11	20	25	31	37	40	47	52	55	60	63	67	71
		10	11	20	25	31	37	40	47	52	55	60	63	67	71