



EL-LR-WF0600N/2

TATE

AHTN



○配光曲線図 (cd/1000lm)

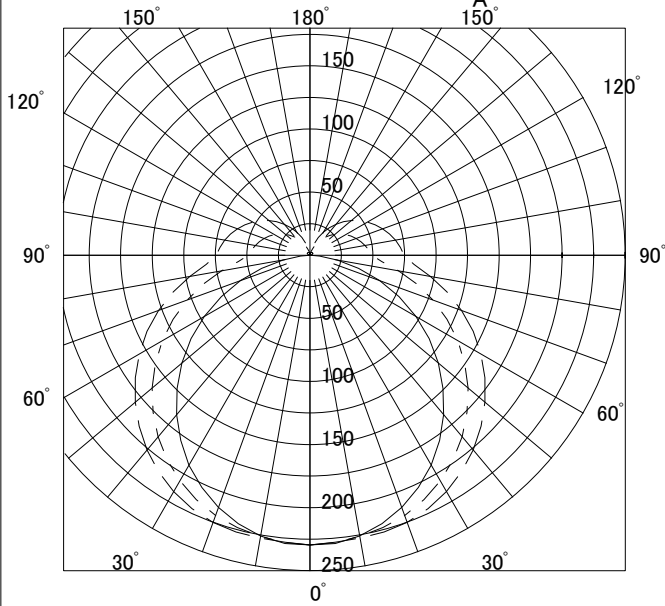


○諸特性

光源		LED1070lm(定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.90m	2.48m	3.09m	3.71m	
	B-B	2.16m	2.80m	3.50m	4.20m	
器具効率	上方光束	下方光束		計		
	17.3%	82.8%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

(ランプ光束: 1070 × 1 = 1070lm/台)

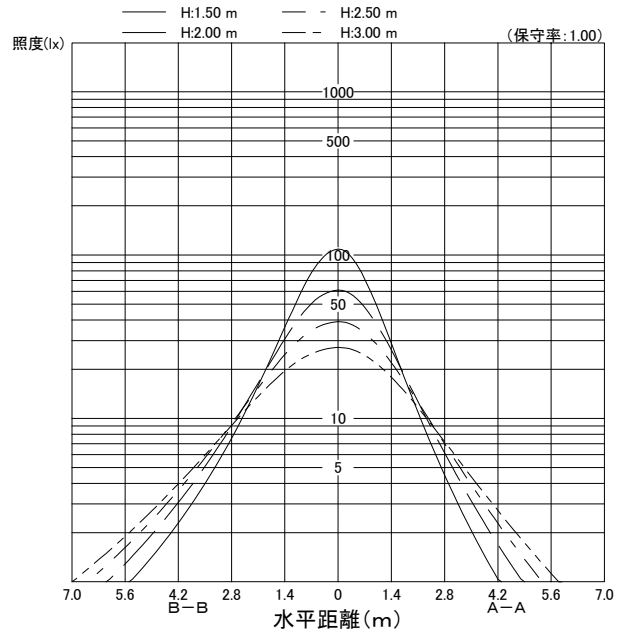

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	42	57	67	75	83	88	96	101	105	110	113	116	119
		10	39	53	61	67	74	78	83	87	90	93	95	98	100
	50	30	29	42	52	60	69	75	84	91	95	102	106	111	115
		10	28	40	49	56	63	68	75	80	83	88	91	94	97
70	30	30	21	34	42	50	59	65	75	82	87	95	100	106	112
		10	21	33	40	48	55	60	68	74	78	83	87	91	95
	50	30	16	27	34	41	49	54	62	68	73	79	83	88	93
		10	16	27	34	41	49	54	62	68	73	79	83	88	93
50	70	30	40	54	63	71	79	83	91	96	99	103	106	110	113
		10	38	50	58	65	71	75	80	84	87	90	92	95	97
	50	30	28	41	50	58	66	71	80	86	91	96	100	105	109
		10	27	39	47	54	61	66	73	77	81	85	88	92	94
30	30	30	21	33	41	48	57	62	72	79	83	90	95	101	106
		10	20	32	39	46	54	58	66	72	76	81	84	89	92
	50	30	16	27	33	40	48	53	61	67	71	77	81	86	90
		10	16	27	33	40	48	53	61	67	71	77	81	86	90
0	50	30	26	38	46	53	60	65	73	78	82	87	91	95	98
		10	25	36	44	50	57	61	68	72	76	80	83	86	89
	30	30	19	31	38	45	53	58	66	72	76	82	86	91	96
		10	19	30	37	44	51	55	62	68	71	76	80	84	87
30	30	15	25	32	39	46	50	58	63	67	73	77	81	85	
	10	15	25	32	39	46	50	58	63	67	73	77	81	85	
30	30	18	29	36	42	49	54	61	66	70	75	79	83	86	
	10	18	28	35	41	48	52	59	64	67	72	75	79	82	
0	30	14	24	30	37	43	48	55	60	64	69	72	77	80	
	10	14	24	30	37	43	48	55	60	64	69	72	77	80	
0	0	0	12	21	27	32	39	43	49	54	58	62	66	70	73