



形名	EL-LR-Y5001N/4 AHTN	電源	
出力	段調光	温度	
モード	節電		
オプション1			
オプション2			
オプション3			
オプション4			
オプション5			



○諸特性

光源		LED					
最大取付間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		4.6%	95.4%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770


○配光曲線図 (cd/1000lm)

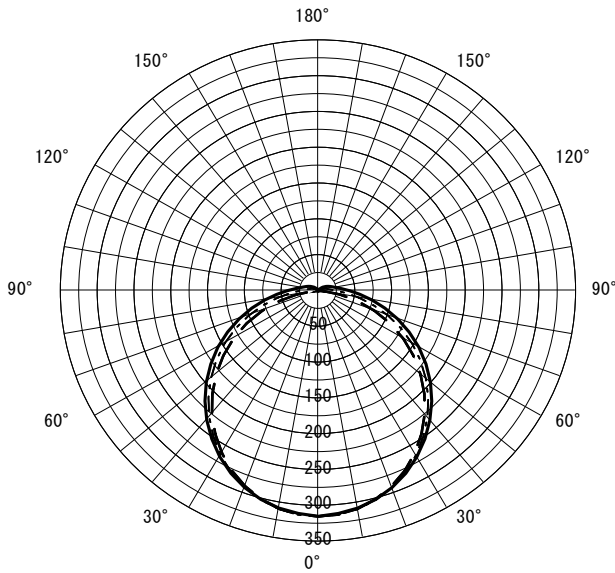

○直射水平面照度

(全光束 : $3580 \times 1 = 3580 \text{lm/台}$)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - - H3.00m (保守率 : 1.00)

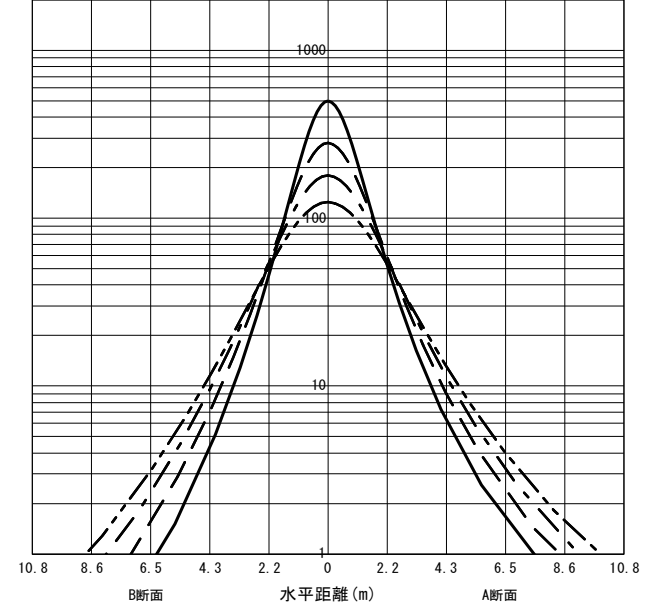

反射率 (%)																																		
天井	80								70				50				30				20	0												
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	61	56	46	44	37	36	31	30	59	54	45	43	36	35	30	30	55	51	43	41	35	35	30	30	52	49	41	40	34	34	30	29	29	27
0.80	72	66	58	54	48	46	41	40	70	64	56	53	47	45	41	40	65	61	54	51	46	44	40	39	61	58	51	49	44	43	39	39	39	36
1.00	80	72	66	61	56	53	49	48	77	70	64	60	55	53	49	47	72	67	61	58	53	51	47	46	67	63	58	56	52	50	46	46	45	43
1.25	88	78	74	68	65	61	57	55	85	76	72	67	63	60	57	54	78	72	68	64	61	58	55	53	73	69	65	62	59	57	54	52	52	50
1.50	93	82	81	73	71	66	64	60	90	80	78	72	70	65	63	60	83	76	74	69	67	63	61	59	77	73	70	67	64	62	59	58	57	54
2.00	101	88	90	80	81	74	74	69	97	86	87	79	79	73	73	68	90	82	82	76	75	71	70	67	83	78	77	73	72	69	67	65	65	62
2.50	106	91	96	85	88	79	81	74	102	89	93	83	86	78	79	74	94	85	87	80	81	76	76	72	87	82	82	77	77	74	73	70	70	67
3.00	109	94	101	88	93	83	87	79	105	92	97	86	90	82	85	78	97	88	91	83	85	79	81	76	90	84	85	81	81	77	77	74	73	71
4.00	114	97	107	92	100	88	95	84	109	95	103	91	97	87	92	83	101	91	96	88	91	84	87	81	93	88	90	85	86	82	83	79	78	76
5.00	117	99	111	95	105	92	100	88	112	97	107	93	102	90	97	87	103	93	99	90	95	88	92	85	96	90	92	87	89	85	87	83	82	79
7.00	121	101	116	98	111	96	107	93	115	99	111	97	107	94	104	92	106	96	103	94	100	91	97	89	98	92	96	90	94	89	91	87	86	83
10.00	123	103	120	101	116	99	113	97	118	101	115	99	112	97	109	96	109	98	106	96	104	94	102	93	101	94	99	93	97	92	95	90	89	86

JIS C 8030:2014

三菱電機照明株式会社