



○諸特性

光源		LED3050lm(ℎ [°] 定格モード)				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	2.31m	3.07m	3.81m	4.57m	
	B-B	2.38m	3.12m	3.81m	4.57m	
器具効率	上方光束	下方光束		計		
	100.1%	0.0%		100.1%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

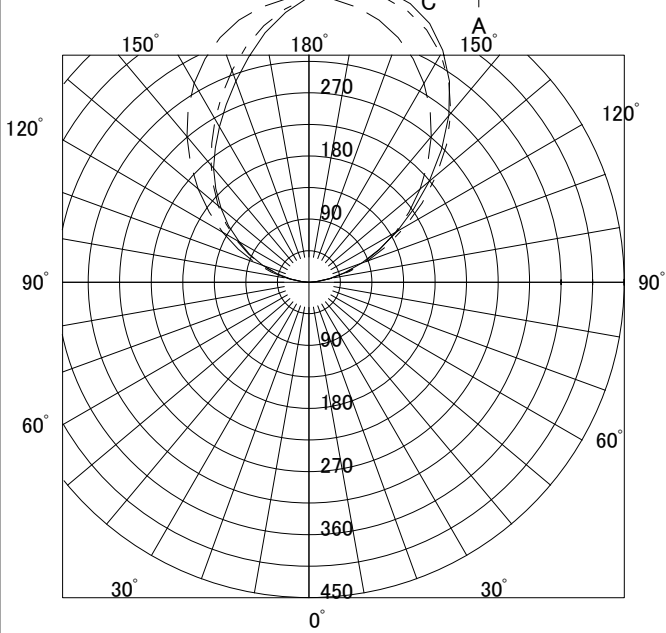

○直射水平面照度

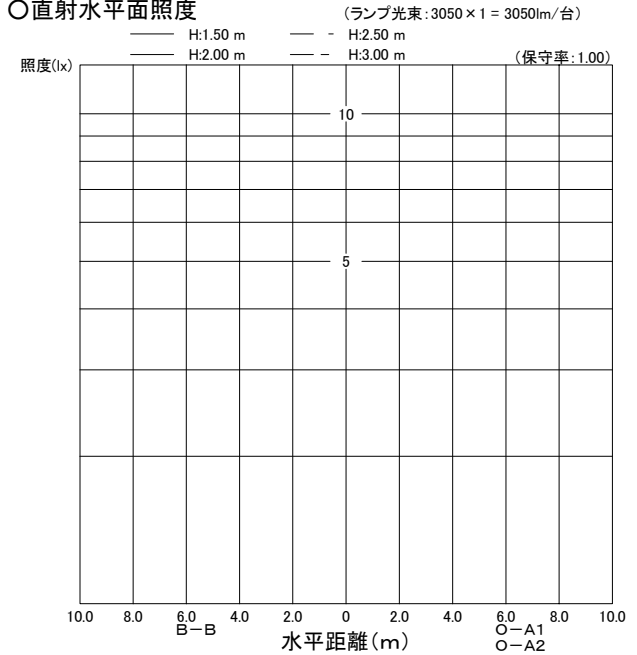

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	49	57	63	69	74	80	85	88	92	94	97	100
		10	35	45	52	57	62	65	70	73	75	78	80	82	83
	50	30	27	37	45	51	58	63	71	76	80	86	89	93	97
		10	26	35	42	47	53	57	63	67	70	74	77	79	82
70	30	30	21	29	37	43	50	55	63	69	74	80	84	90	94
		10	20	28	35	41	46	51	58	62	66	71	74	77	80
	10	30	17	24	30	36	41	46	53	58	62	67	71	75	78
		10	17	24	30	36	41	46	53	58	62	67	71	75	78
50	70	30	32	41	48	53	58	62	68	71	74	77	79	82	84
		10	30	38	44	49	53	56	60	63	65	67	69	71	72
	50	30	23	31	38	44	49	54	60	65	68	73	75	79	82
		10	22	30	36	41	46	49	55	58	61	64	66	69	71
30	30	30	18	25	32	37	43	47	54	59	63	68	72	76	80
		10	18	25	31	35	40	44	50	54	57	61	64	67	69
	10	30	15	21	26	31	36	40	46	51	54	58	61	65	68
		10	15	21	26	31	36	40	46	51	54	58	61	65	68
0	50	30	16	22	26	30	34	36	41	44	46	49	51	53	55
		10	16	21	25	28	32	34	38	40	42	45	46	48	49
	30	30	13	18	22	26	29	33	37	40	43	46	48	51	53
		10	13	17	21	25	28	31	35	38	40	43	45	47	48
30	30	30	8	10	13	15	17	19	21	23	25	26	28	29	30
		10	7	10	13	15	17	18	21	22	24	25	26	27	28
	10	30	6	9	11	13	15	17	19	21	22	24	25	27	28
		10	6	9	11	13	15	17	19	21	22	24	25	27	28
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	