


形名	EL-LW-FH22151A AHN	電源		○諸特性
出力	固定出力	温度		
モード				光源
オプション1			通常時	LDL20T-N/10/13-G3
オプション2				最大取付間隔
オプション3				高さ
オプション4				A-A'
オプション5				B-B'
				器具効率
				上方光束
				下方光束
				計
				保守率




○配光曲線図 (cd/1000lm)

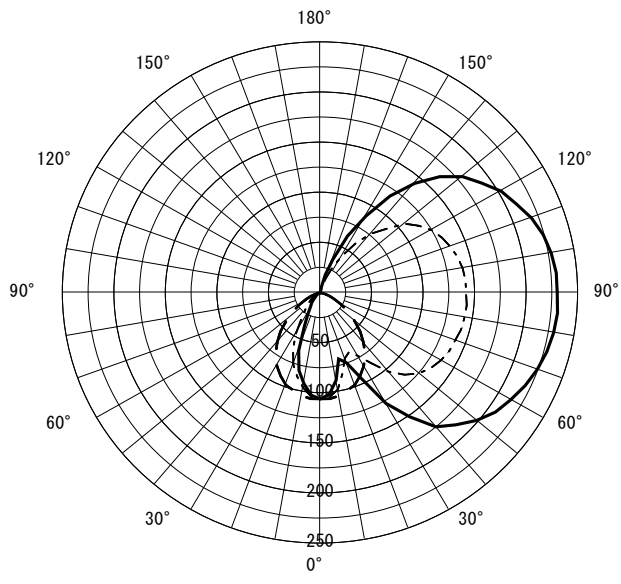

○直射水平面照度

(全光束 : 1300 × 1 = 1300lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率 : 1.00)

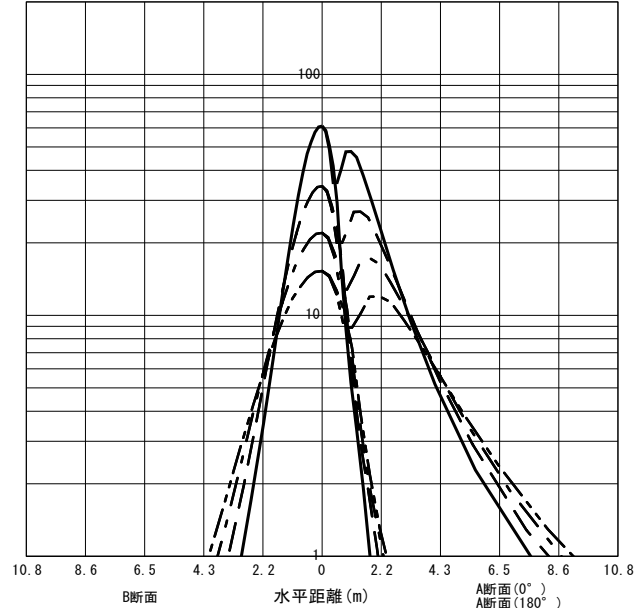

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10														
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10				
室指数	作業面照明率 (× 0.01)																																	
0.60	38	35	27	25	20	19	16	15	35	32	25	24	19	18	15	14	29	27	21	21	16	16	13	13	24	23	18	18	14	14	11	11	10	8
0.80	45	41	34	32	26	25	21	21	41	38	31	30	25	24	20	20	34	32	27	26	22	21	18	17	29	27	23	22	18	18	15	15	14	11
1.00	50	45	39	36	32	30	26	25	46	42	36	34	30	28	25	24	38	36	31	29	26	25	21	21	32	30	26	25	22	21	18	18	17	13
1.25	55	49	45	41	37	35	31	30	51	46	41	38	35	33	29	28	42	39	35	33	30	28	26	25	35	33	29	28	25	24	22	21	20	16
1.50	59	52	49	44	41	38	36	34	54	48	45	41	39	36	33	32	45	41	38	36	33	31	29	28	37	35	32	30	28	27	25	24	22	18
2.00	65	56	55	49	48	44	42	39	59	52	51	46	45	41	40	37	49	45	43	40	38	36	34	33	40	38	36	34	32	31	29	28	26	21
2.50	68	59	60	53	53	48	44	44	62	55	55	49	49	45	44	41	52	47	46	43	42	39	38	36	43	40	39	37	35	34	32	31	29	23
3.00	71	61	63	55	57	51	52	47	65	57	58	52	53	48	48	44	54	49	49	45	45	42	41	39	44	42	41	39	38	36	35	34	31	25
4.00	75	63	68	59	63	55	58	51	68	59	63	55	58	52	54	48	57	51	53	48	49	45	46	43	47	44	44	41	41	39	39	37	34	28
5.00	77	65	71	61	66	58	62	55	70	61	66	57	61	54	57	51	59	53	55	50	52	48	49	45	48	45	46	43	43	41	41	39	36	30
7.00	80	67	75	64	71	61	68	59	73	63	69	60	66	58	63	55	61	55	58	53	55	51	53	49	50	47	48	46	46	44	45	42	39	33
10.00	82	69	79	66	76	64	73	62	75	65	72	62	70	60	67	59	63	57	61	55	59	53	57	52	52	49	51	48	49	46	48	45	42	35

JIS C 8030:2014

三菱電機照明株式会社