



EL-LYB4002A AHN(31N)

B4332A

AHN




配光曲線図 (cd/1000lm)

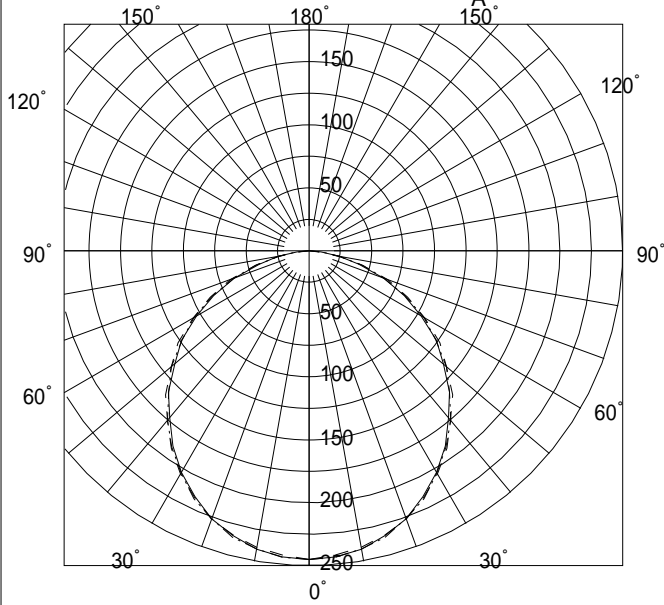

諸特性

光源		LDL40S.N/31/35					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.89m	2.50m	3.11m	3.72m		
	B-B	2.13m	2.66m	3.24m	3.83m		
器具効率		上方光束	下方光束	計			
		0.0%	68.3%	68.3%			
保守率		良い	0.770	普通	0.720	悪い	0.640

直射水平面照度

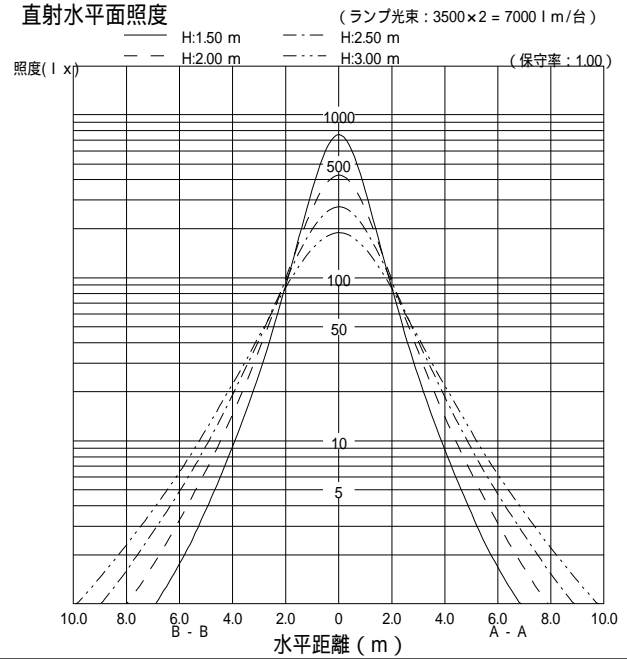

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	43	50	56	62	65	71	74	77	80	82	84	86
		10	29	40	45	50	55	58	62	64	66	68	69	71	72
	50	30	22	33	40	46	53	57	63	68	71	75	78	81	84
		10	21	31	38	43	48	52	57	60	62	65	67	69	71
70	30	30	17	27	33	40	46	50	57	63	66	71	74	78	82
		10	16	26	32	38	43	47	52	56	59	62	65	67	69
	70	30	30	42	49	54	60	63	68	72	74	77	79	81	83
		10	29	39	44	49	54	57	60	63	65	67	68	70	71
50	50	30	22	33	39	45	52	55	62	66	69	73	75	78	81
		10	21	31	37	42	48	51	56	59	61	64	66	68	70
	30	30	17	27	33	39	46	50	56	61	64	69	72	76	79
		10	16	26	32	37	43	47	52	56	58	62	64	67	69
30	50	30	21	32	38	44	49	53	59	63	65	69	71	73	75
		10	20	30	36	41	47	50	54	58	60	63	65	67	68
	30	30	16	26	32	38	44	48	54	59	62	66	68	72	74
		10	16	26	31	37	42	46	51	55	57	61	63	65	67
0	30	30	16	26	32	37	43	47	52	56	59	62	65	68	70
	10	10	13	23	28	33	39	43	48	52	54	58	60	63	65
0	0	0	12	21	26	32	37	41	46	50	53	56	58	61	63