



EL-LYB4002A AHN(31N)

L4802F

AHN




配光曲線図 (cd/1000lm)

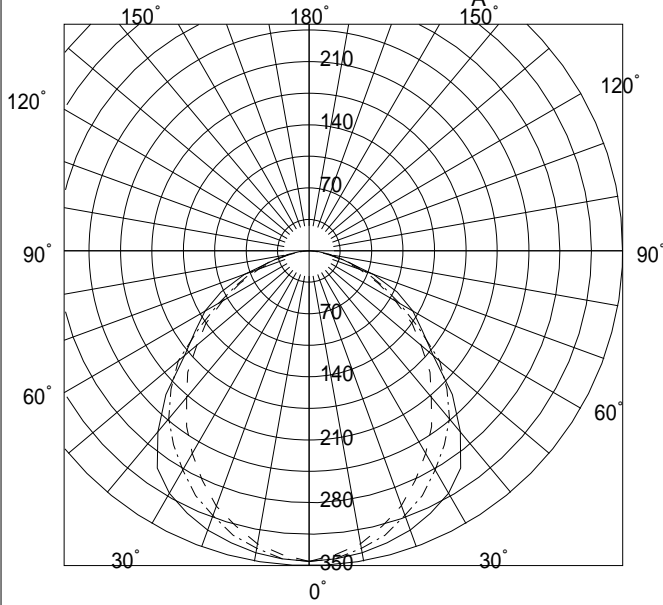

諸特性

光源		LDL40S.N/31/35					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	2.03m	2.66m	3.33m	3.97m		
	B-B	2.01m	2.47m	3.01m	3.55m		
器具効率		上方光束		下方光束	計		
		0.0%		87.4%	87.4%		
保守率		良い	0.810	普通	0.760	悪い	0.670

直射水平面照度

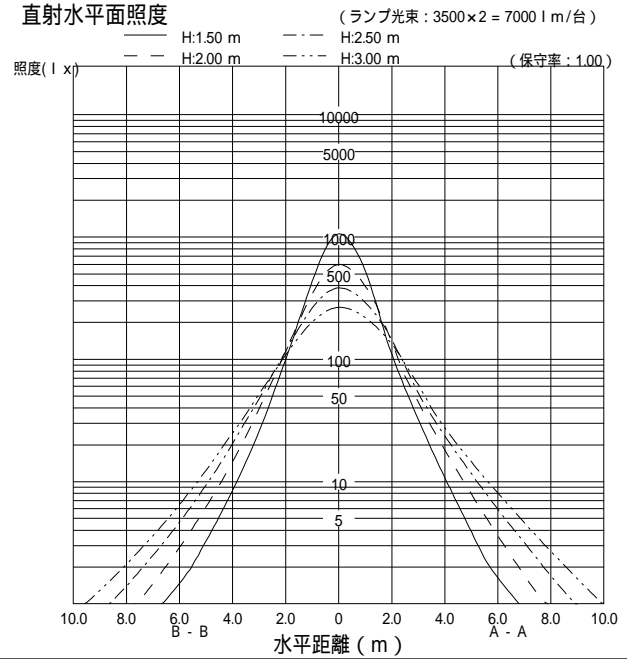

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	41	57	66	73	81	85	92	96	99	103	105	108	110
		10	39	52	60	66	72	75	80	83	85	87	89	91	92
	50	30	29	44	53	61	70	75	83	88	92	97	100	104	107
		10	28	42	50	57	64	68	74	78	81	84	86	89	90
	30	30	23	37	45	53	62	67	75	82	86	92	96	101	105
70		10	23	36	43	51	58	62	69	74	77	81	84	87	89
	70	30	40	55	64	71	78	82	89	93	96	99	101	104	106
		10	38	51	58	65	70	74	79	82	84	86	88	90	91
	50	30	29	44	52	60	68	73	81	86	89	94	97	101	104
		10	28	42	49	56	63	67	73	77	80	83	85	88	89
50	30	30	23	37	45	53	61	66	74	80	84	90	93	98	101
		10	22	36	43	50	58	62	68	73	76	80	83	86	88
	10	10	19	31	38	46	53	57	64	70	73	78	81	84	87
	50	30	28	42	50	58	65	70	77	82	85	89	91	94	97
		10	27	41	48	55	62	65	71	75	78	81	83	86	88
30	30	30	23	36	44	51	59	64	71	77	80	85	88	92	95
		10	22	35	42	50	57	61	67	72	75	79	81	84	86
	10	10	19	31	38	45	53	57	64	69	72	76	79	83	85
0	30	30	22	36	43	50	58	62	69	74	77	81	84	87	90
		10	22	35	42	49	56	60	66	71	74	77	80	83	85
0	0	0	17	30	36	43	50	54	61	66	69	73	76	79	81