



EL-LYB4002A AHN(31N)

L4892A

AHN




配光曲線図 ( c d / 1000 l m )

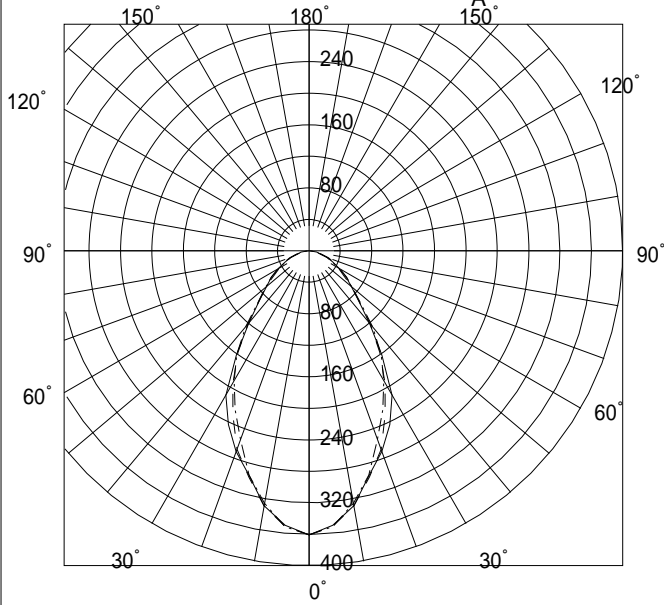

諸特性

光源		LDL40S.N/31/35					
最大取付間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.45m	1.89m	2.35m	2.81m		
	B-B	1.69m	2.04m	2.45m	2.87m		
器具効率		上方光束		下方光束	計		
		0.0%		50.1%	50.1%		
保守率		良い	0.810	普通	0.760	悪い	0.670

直射水平面照度

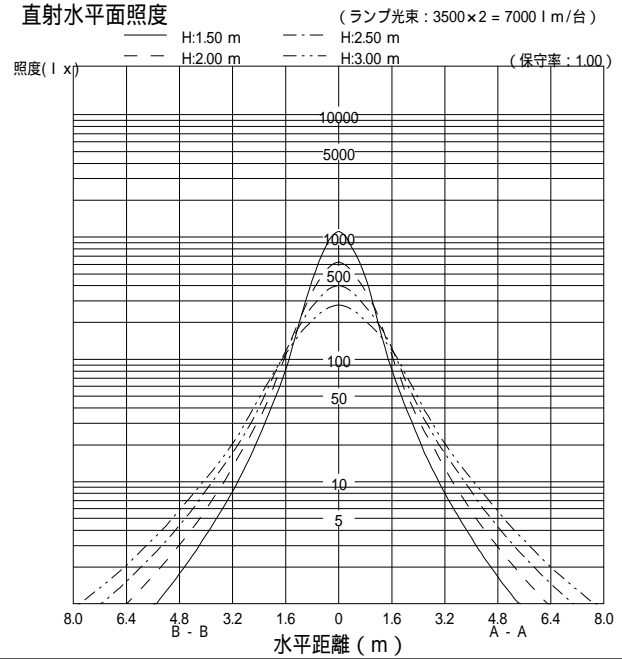

作業面照明率 ( × 0 . 0 1 )

反射率 ( % )			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	26	35	41	45	48	51	54	56	58	60	61	62	63
		10	25	32	37	40	43	45	47	49	50	51	52	52	53
	50	30	20	28	34	38	42	45	49	52	54	57	58	60	62
		10	19	27	32	35	39	41	44	46	47	49	50	51	52
70	30	30	17	24	30	34	38	41	46	49	51	54	56	59	61
		10	16	24	29	32	36	38	42	44	45	48	49	51	52
	70	30	26	34	40	43	47	49	52	54	56	58	59	60	61
		10	24	32	36	39	42	44	46	48	49	50	51	52	52
50	50	30	20	28	34	38	41	44	48	51	53	55	57	59	60
		10	19	27	32	35	38	41	44	46	47	49	50	51	52
	30	30	16	24	30	34	38	41	45	48	50	53	55	57	59
		10	16	24	28	32	36	38	41	44	45	47	48	50	51
30	10	10	14	21	26	30	33	36	39	42	44	46	47	49	51
	50	30	19	27	33	36	40	42	46	48	50	52	53	55	56
		10	19	26	31	34	38	40	43	45	46	48	49	50	51
	30	30	16	24	29	33	37	39	43	46	48	50	52	54	55
0	10	10	14	21	26	30	33	36	39	41	43	45	47	48	50
	30	30	16	23	28	32	36	38	42	44	46	48	49	51	52
0	0	0	13	20	25	28	32	34	37	40	41	43	45	46	47