



EL-LYB4212A AHX(31N)

AHX




配光曲線図 (cd/1000lm)

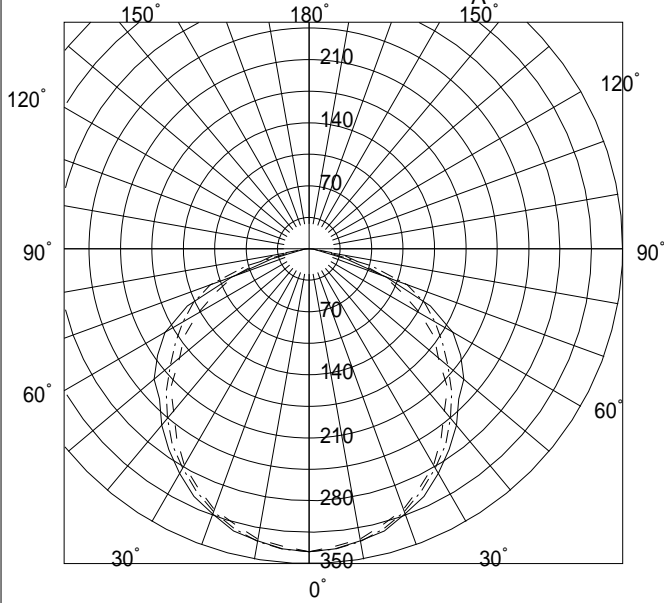

諸特性

光源		LDL40S.N/31/35					
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.96m	2.58m	3.21m	3.84m		
	B-B	2.11m	2.63m	3.20m	3.79m		
器具効率		上方光束		下方光束	計		
		0.0%		97.4%	97.4%		
保守率		良い	0.810	普通	0.760	悪い	0.670

直射水平面照度

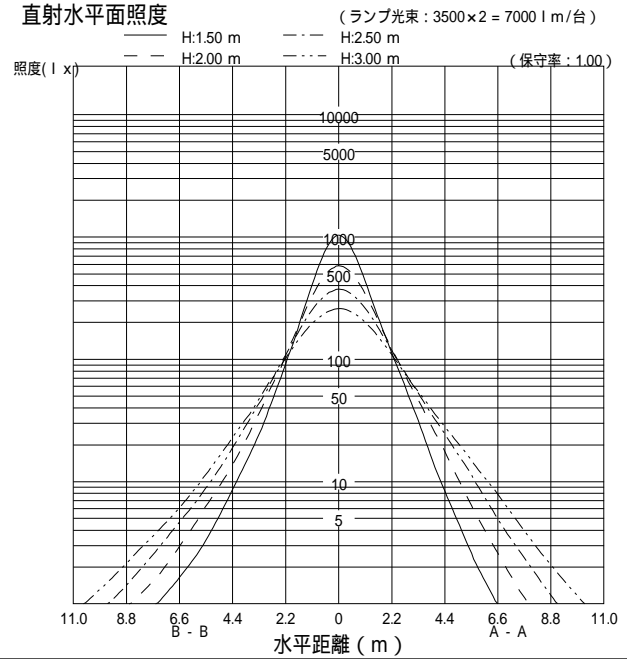

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	61	71	79	88	93	101	106	109	114	117	120	123
		10	41	56	64	71	78	82	88	92	94	97	99	101	103
	50	30	31	46	56	65	75	81	90	97	101	107	111	116	120
		10	30	44	53	61	68	73	80	86	89	93	96	99	101
	30	30	23	38	47	56	65	71	82	89	94	102	106	112	117
70		10	23	37	45	53	61	66	75	80	84	89	93	96	99
	70	30	43	59	69	77	85	90	97	102	106	110	113	116	118
		10	40	55	63	70	76	80	86	90	92	96	98	100	101
	50	30	30	46	55	64	73	79	88	94	98	104	108	112	116
		10	29	44	52	60	68	72	79	84	88	92	95	98	100
50	30	30	23	38	46	55	64	70	80	87	92	99	103	109	113
		10	23	36	45	53	61	66	74	80	83	88	92	96	98
	10	10	19	31	39	47	56	61	69	76	80	85	89	94	97
	50	30	29	44	53	61	70	75	83	89	93	98	101	105	108
		10	29	43	51	58	66	70	77	82	85	90	92	95	98
30	30	30	23	37	45	54	63	68	77	84	88	94	98	103	106
		10	23	36	44	52	60	65	73	78	82	87	90	94	96
	10	10	18	31	39	47	55	60	68	75	79	84	88	92	95
0	30	30	23	36	44	52	61	66	74	80	84	89	93	97	100
		10	22	36	43	51	59	64	71	77	80	85	88	92	95
0	0	0	17	29	37	44	52	57	65	71	75	80	84	88	91