


形名	EL-M10011N AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.880	普通	0.860	悪い	0.810

○配光曲線図 (cd/1000lm)

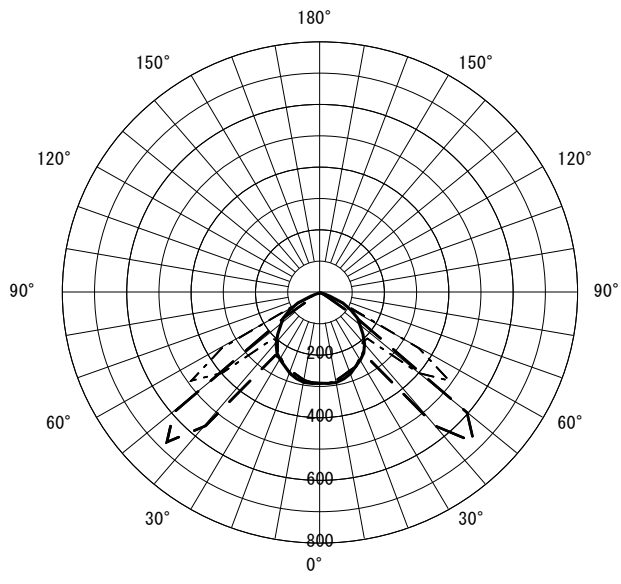

○直射水平面照度 (全光束 : 12900 × 1 = 12900lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

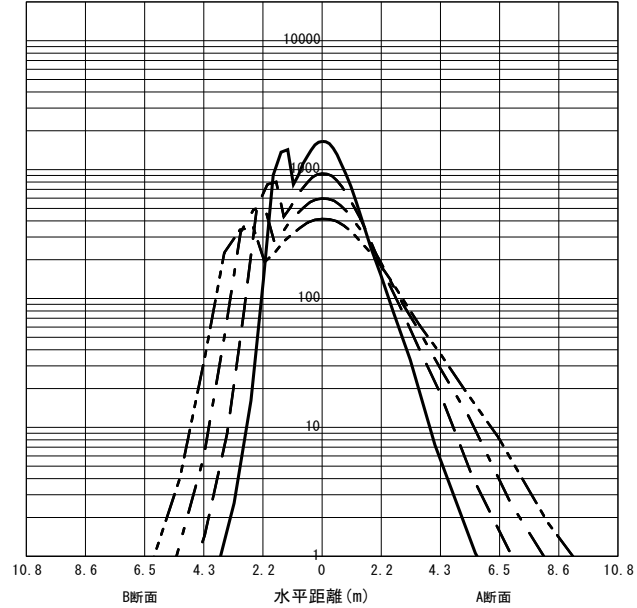

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	60	55	44	42	35	34	29	28	58	54	44	42	35	34	29	28	54	51	42	40	34	33	28	28	52	49	41	39	33	33	28	28	28	26				
0.80	74	67	59	56	50	48	43	42	72	66	58	55	49	48	43	42	68	63	56	54	48	47	43	42	64	61	54	52	47	46	42	42	41	40				
1.00	84	75	70	65	61	58	54	52	81	74	69	64	60	57	54	52	77	71	66	63	59	57	53	52	73	68	64	61	57	56	52	51	51	49				
1.25	93	82	80	73	71	67	64	61	90	81	78	72	70	66	64	61	85	78	75	71	68	65	63	61	80	75	72	69	66	64	61	60	60	58				
1.50	98	87	87	79	78	73	72	68	95	85	85	78	77	72	71	67	90	82	81	76	75	71	69	67	85	80	78	74	72	70	68	66	66	64				
2.00	106	92	96	86	89	81	83	77	103	91	94	85	87	80	81	76	96	88	89	83	84	79	79	75	91	86	85	81	81	78	77	75	74	72				
2.50	111	96	103	91	96	86	90	82	107	94	100	89	93	85	88	82	101	92	95	87	90	84	85	81	95	89	90	86	86	82	82	80	79	77				
3.00	114	98	107	93	101	90	95	86	110	97	104	92	98	89	93	86	103	94	98	90	94	87	90	84	97	91	93	88	90	86	86	83	83	81				
4.00	119	101	112	97	107	94	103	91	114	99	109	96	104	93	100	91	107	97	103	94	99	92	96	89	101	94	97	92	94	90	92	88	87	86				
5.00	121	102	116	100	112	97	108	95	117	101	112	98	108	96	105	94	109	99	106	96	103	94	100	92	102	96	100	94	97	93	95	91	90	88				
7.00	124	104	120	102	117	100	114	98	120	103	116	101	113	99	110	98	112	101	109	99	107	97	104	96	105	98	103	97	101	96	99	94	94	92				
10.00	126	106	123	104	121	103	118	101	122	104	119	103	117	102	115	100	113	102	112	101	110	100	108	99	106	100	105	99	103	98	102	97	96	94				

JIS C 8030:2014

三菱電機照明株式会社