


|        |            |    |  |      |
|--------|------------|----|--|------|
| 形名     | EL-PE1706C | 電源 |  | ○諸特性 |
| 出力     | 連調単色       | 温度 |  |      |
| モード    |            |    |  |      |
| オプション1 |            |    |  |      |
| オプション2 |            |    |  |      |
| オプション3 |            |    |  |      |
| オプション4 |            |    |  |      |
| オプション5 |            |    |  |      |




|                |      |                    |       |       |       |    |       |
|----------------|------|--------------------|-------|-------|-------|----|-------|
| 光源             |      | LDA5L-G-E17/40/D/S |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                  |       |       |       |    |       |
|                | A-A' | 1.1 H              |       |       |       |    |       |
|                | B-B' | 1.1 H              |       |       |       |    |       |
| 器具効率           |      | 上方光束               | 下方光束  | 計     |       |    |       |
|                |      | 27.8%              | 52.9% | 80.7% |       |    |       |
| 保守率            |      | 良い                 | 0.660 | 普通    | 0.630 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

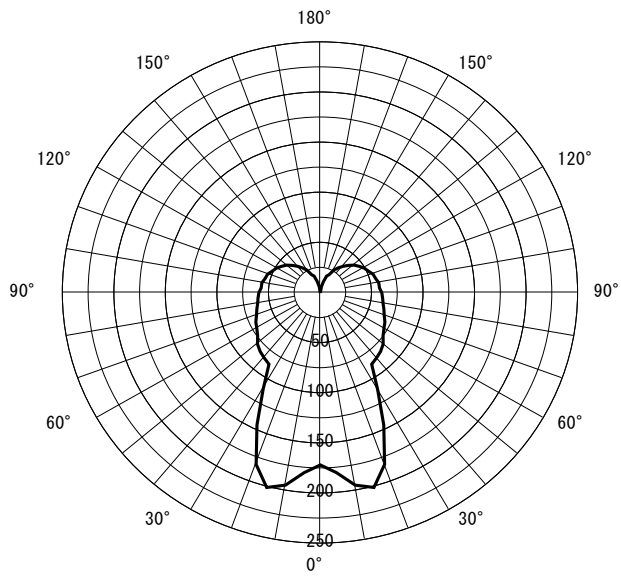

○直射水平面照度 (全光束: 440 × 1 = 440lm/台)

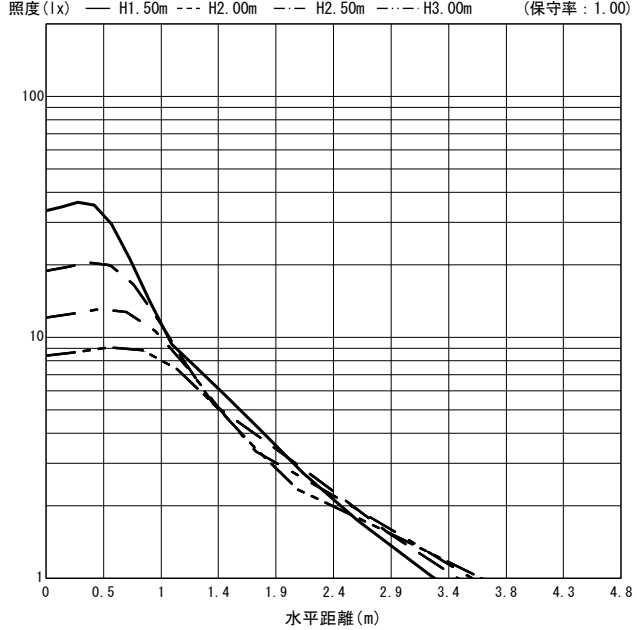

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井      | 80              |    |    |    | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 20 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |
| 室指数     | 作業面照度率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.60    | 45              | 42 | 34 | 32 | 27 | 26 | 23 | 22 | 42 | 39 | 32 | 31 | 26 | 25 | 22 | 21 | 37 | 35 | 29 | 28 | 24 | 23 | 20 | 20 | 32 | 31 | 26 | 25 | 21 | 21 | 18 | 18 | 17 | 15 |
| 0.80    | 53              | 48 | 42 | 39 | 34 | 33 | 29 | 28 | 50 | 45 | 39 | 37 | 33 | 31 | 28 | 27 | 43 | 40 | 35 | 33 | 29 | 29 | 25 | 25 | 37 | 35 | 31 | 30 | 26 | 26 | 23 | 23 | 22 | 19 |
| 1.00    | 59              | 53 | 47 | 44 | 40 | 38 | 34 | 33 | 55 | 50 | 45 | 42 | 38 | 36 | 32 | 31 | 47 | 44 | 39 | 37 | 34 | 33 | 29 | 29 | 41 | 38 | 35 | 33 | 30 | 29 | 27 | 26 | 25 | 21 |
| 1.25    | 64              | 57 | 53 | 49 | 45 | 43 | 39 | 38 | 60 | 54 | 50 | 46 | 43 | 41 | 38 | 36 | 51 | 47 | 44 | 41 | 38 | 37 | 34 | 33 | 44 | 41 | 38 | 37 | 34 | 33 | 30 | 30 | 28 | 24 |
| 1.50    | 68              | 60 | 58 | 52 | 50 | 46 | 44 | 42 | 63 | 56 | 54 | 50 | 47 | 44 | 42 | 40 | 54 | 50 | 47 | 44 | 42 | 40 | 37 | 36 | 46 | 43 | 41 | 39 | 37 | 36 | 33 | 33 | 31 | 26 |
| 2.00    | 74              | 64 | 64 | 58 | 57 | 52 | 51 | 47 | 68 | 60 | 60 | 54 | 54 | 49 | 48 | 45 | 58 | 53 | 52 | 49 | 47 | 44 | 43 | 41 | 50 | 47 | 45 | 43 | 41 | 40 | 38 | 37 | 35 | 30 |
| 2.50    | 78              | 67 | 69 | 61 | 62 | 56 | 57 | 52 | 72 | 63 | 64 | 58 | 58 | 53 | 53 | 49 | 61 | 56 | 56 | 52 | 51 | 48 | 47 | 45 | 52 | 49 | 48 | 46 | 44 | 43 | 41 | 40 | 38 | 33 |
| 3.00    | 80              | 69 | 73 | 64 | 66 | 59 | 61 | 55 | 74 | 65 | 68 | 60 | 62 | 56 | 57 | 52 | 63 | 58 | 58 | 54 | 54 | 50 | 50 | 47 | 54 | 51 | 50 | 48 | 47 | 45 | 44 | 43 | 40 | 35 |
| 4.00    | 84              | 72 | 78 | 67 | 72 | 63 | 67 | 60 | 78 | 68 | 72 | 64 | 67 | 60 | 63 | 57 | 66 | 60 | 62 | 57 | 58 | 54 | 55 | 51 | 56 | 53 | 53 | 50 | 50 | 48 | 48 | 46 | 43 | 38 |
| 5.00    | 87              | 73 | 81 | 69 | 76 | 66 | 71 | 63 | 80 | 69 | 75 | 66 | 71 | 63 | 67 | 60 | 68 | 62 | 65 | 59 | 61 | 56 | 58 | 54 | 58 | 54 | 55 | 52 | 53 | 50 | 51 | 48 | 46 | 40 |
| 7.00    | 89              | 75 | 85 | 72 | 81 | 69 | 77 | 67 | 83 | 71 | 79 | 69 | 75 | 66 | 72 | 64 | 71 | 64 | 68 | 61 | 65 | 59 | 63 | 57 | 60 | 56 | 58 | 55 | 56 | 53 | 54 | 51 | 49 | 42 |
| 10.00   | 92              | 77 | 88 | 75 | 85 | 72 | 82 | 70 | 85 | 73 | 82 | 71 | 79 | 69 | 77 | 67 | 72 | 65 | 70 | 64 | 68 | 62 | 66 | 60 | 62 | 58 | 60 | 57 | 59 | 55 | 57 | 54 | 51 | 45 |

JIS C 8030:2014

三菱電機照明株式会社