


|        |             |    |  |      |
|--------|-------------|----|--|------|
| 形名     | EL-PE17307C | 電源 |  | ○諸特性 |
| 出力     | 固定出力        | 温度 |  |      |
| モード    |             |    |  |      |
| オプション1 |             |    |  |      |
| オプション2 |             |    |  |      |
| オプション3 |             |    |  |      |
| オプション4 |             |    |  |      |
| オプション5 |             |    |  |      |




|                |      |                  |       |       |       |    |       |
|----------------|------|------------------|-------|-------|-------|----|-------|
| 光源             |      | LDA8N-G-E17/60/S |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                |       |       |       |    |       |
|                | A-A' | 1.8 H            |       |       |       |    |       |
|                | B-B' | 1.8 H            |       |       |       |    |       |
| 器具効率           |      | 上方光束             | 下方光束  | 計     |       |    |       |
|                |      | 63.9%            | 24.7% | 88.6% |       |    |       |
| 保守率            |      | 良い               | 0.630 | 普通    | 0.590 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

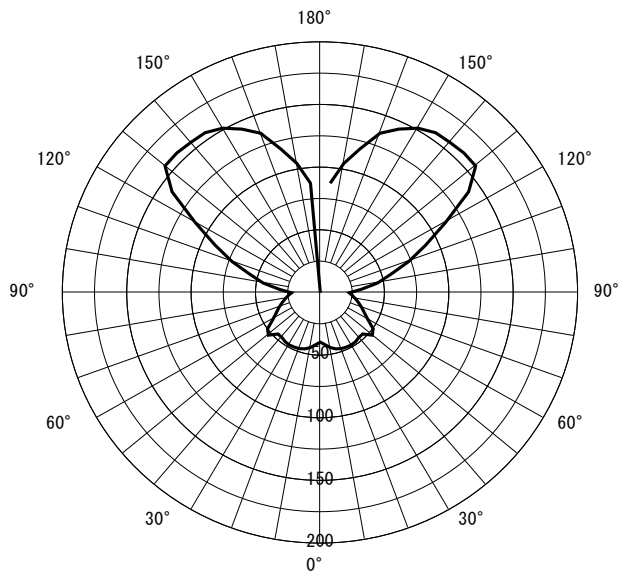

○直射水平面照度 (全光束 : 920 × 3 = 2760lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

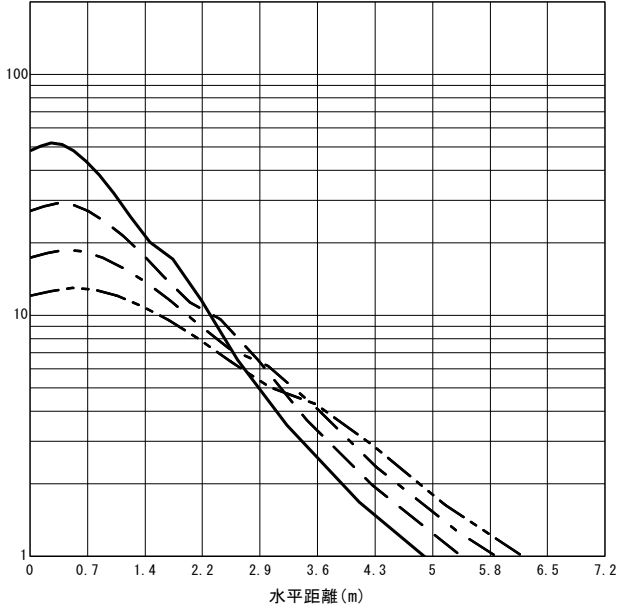

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| 天井      | 80              |    |    |    |    |    |    |    | 70 |    |    |    |    |    |    |    | 50 |    |    |    |    |    |    |    | 30 |    |    |    |    |    |    |    | 20 | 0  |    |    |    |    |    |    |    |   |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |   |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| 室指数     | 作業面照明率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |
| 0.60    | 43              | 40 | 32 | 30 | 24 | 24 | 19 | 19 | 38 | 36 | 28 | 27 | 22 | 21 | 18 | 17 | 29 | 27 | 22 | 21 | 17 | 17 | 14 | 14 | 21 | 20 | 16 | 16 | 13 | 12 | 10 | 10 | 8  | 4  |    |    |    |    |    |    |    |   |
| 0.80    | 52              | 47 | 40 | 38 | 32 | 31 | 27 | 26 | 46 | 42 | 36 | 34 | 29 | 28 | 24 | 24 | 35 | 32 | 28 | 26 | 23 | 22 | 19 | 19 | 25 | 24 | 20 | 20 | 17 | 17 | 14 | 14 | 12 | 7  |    |    |    |    |    |    |    |   |
| 1.00    | 59              | 53 | 47 | 43 | 39 | 37 | 33 | 32 | 52 | 47 | 42 | 39 | 35 | 33 | 30 | 29 | 39 | 36 | 32 | 31 | 27 | 26 | 24 | 23 | 28 | 26 | 23 | 23 | 20 | 20 | 18 | 17 | 14 | 8  |    |    |    |    |    |    |    |   |
| 1.25    | 65              | 57 | 53 | 49 | 45 | 43 | 39 | 38 | 57 | 51 | 47 | 44 | 41 | 38 | 36 | 34 | 43 | 40 | 37 | 34 | 32 | 30 | 28 | 27 | 31 | 29 | 27 | 25 | 23 | 23 | 21 | 20 | 17 | 10 |    |    |    |    |    |    |    |   |
| 1.50    | 69              | 61 | 58 | 53 | 51 | 47 | 45 | 42 | 61 | 54 | 52 | 48 | 45 | 42 | 40 | 38 | 46 | 42 | 40 | 37 | 35 | 34 | 32 | 30 | 33 | 31 | 29 | 28 | 26 | 25 | 23 | 23 | 19 | 11 |    |    |    |    |    |    |    |   |
| 2.00    | 75              | 65 | 66 | 59 | 59 | 53 | 53 | 49 | 66 | 59 | 58 | 53 | 52 | 48 | 47 | 44 | 50 | 46 | 45 | 42 | 41 | 38 | 37 | 35 | 36 | 34 | 32 | 31 | 30 | 29 | 27 | 27 | 22 | 13 |    |    |    |    |    |    |    |   |
| 2.50    | 79              | 68 | 71 | 63 | 64 | 58 | 59 | 54 | 70 | 61 | 63 | 56 | 57 | 52 | 53 | 49 | 53 | 48 | 48 | 44 | 44 | 41 | 41 | 39 | 38 | 35 | 35 | 33 | 32 | 31 | 30 | 29 | 24 | 15 |    |    |    |    |    |    |    |   |
| 3.00    | 82              | 70 | 75 | 65 | 69 | 61 | 63 | 57 | 72 | 63 | 66 | 59 | 61 | 55 | 57 | 52 | 54 | 49 | 50 | 46 | 47 | 44 | 44 | 41 | 39 | 37 | 36 | 35 | 34 | 33 | 32 | 31 | 26 | 16 |    |    |    |    |    |    |    |   |
| 4.00    | 86              | 73 | 80 | 69 | 75 | 65 | 70 | 62 | 76 | 66 | 71 | 62 | 66 | 59 | 62 | 56 | 57 | 52 | 54 | 49 | 51 | 47 | 48 | 45 | 41 | 38 | 39 | 37 | 37 | 35 | 35 | 34 | 28 | 17 |    |    |    |    |    |    |    |   |
| 5.00    | 88              | 75 | 83 | 71 | 79 | 68 | 74 | 65 | 78 | 67 | 73 | 64 | 70 | 62 | 66 | 59 | 59 | 53 | 56 | 51 | 53 | 49 | 51 | 47 | 42 | 40 | 40 | 38 | 39 | 37 | 37 | 36 | 30 | 18 |    |    |    |    |    |    |    |   |
| 7.00    | 91              | 77 | 87 | 74 | 84 | 72 | 80 | 70 | 80 | 69 | 77 | 67 | 74 | 65 | 71 | 63 | 61 | 55 | 58 | 53 | 56 | 52 | 55 | 50 | 44 | 41 | 42 | 40 | 41 | 39 | 40 | 38 | 32 | 20 |    |    |    |    |    |    |    |   |
| 10.00   | 94              | 78 | 91 | 76 | 88 | 75 | 85 | 73 | 82 | 71 | 80 | 69 | 78 | 67 | 75 | 66 | 62 | 56 | 61 | 55 | 59 | 54 | 58 | 53 | 45 | 42 | 44 | 41 | 43 | 40 | 42 | 40 | 33 | 21 |    |    |    |    |    |    |    |   |

JIS C 8030:2014

三菱電機照明株式会社