



EL-PE2602C

○諸特性

光源		LDA8L-G/60/S			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	1.99m	2.66m	3.32m	3.98m
	B-B	1.99m	2.66m	3.32m	3.98m
器具効率	上方光束	下方光束		計	
	29.8%	58.4%		88.1%	
保守率	良い 0.800	普通 0.760	悪い 0.680		




○配光曲線図 (cd/1000lm)

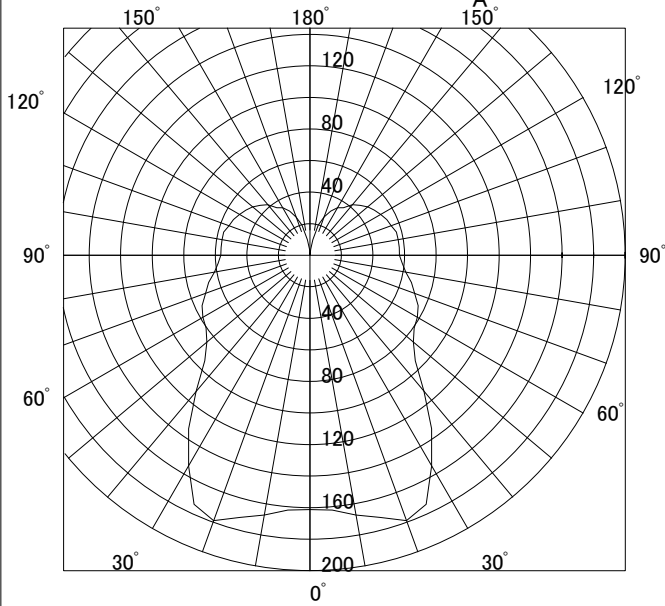

○直射水平面照度

(ランプ光束: 810×1 = 810lm/台)

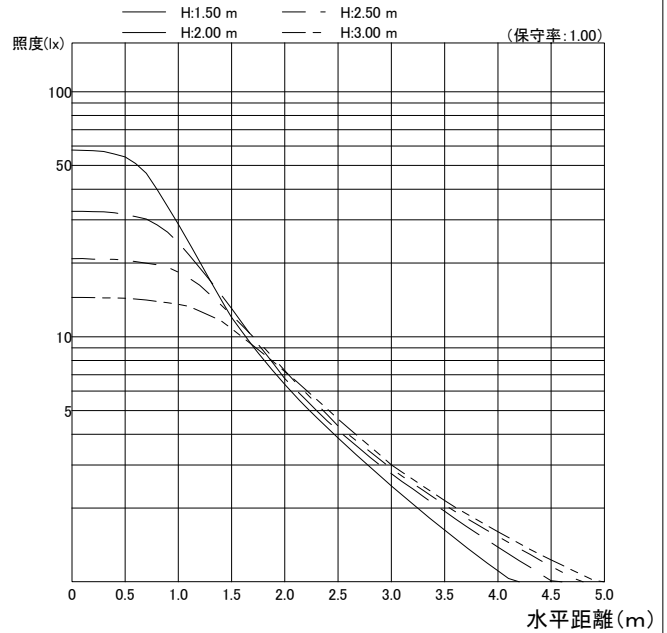

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	50	57	64	70	75	81	85	88	92	95	98	101
		10	35	46	52	57	63	66	70	74	76	79	80	83	84
	50	30	26	37	45	51	58	63	70	76	80	85	89	94	97
		10	25	36	42	48	53	57	63	67	70	74	76	80	82
70	70	30	35	46	54	59	65	69	75	79	82	86	88	91	93
		10	33	43	49	54	59	62	66	69	72	74	76	78	80
	50	30	25	35	42	48	55	59	66	71	74	79	83	87	90
		10	24	34	40	45	51	54	60	64	66	70	73	76	78
50	70	30	19	29	35	41	47	51	59	64	68	74	78	83	87
		10	19	28	33	39	44	48	54	59	62	66	69	73	76
	50	30	22	32	37	43	48	52	57	62	65	69	71	75	78
		10	21	30	36	40	45	48	53	57	59	63	65	68	70
30	70	30	17	26	31	36	42	46	52	57	60	65	68	72	75
		10	17	25	30	35	40	44	49	53	56	60	62	66	69
	50	30	15	23	28	32	37	40	46	49	52	56	59	62	65
0	70	30	15	23	27	32	36	39	44	47	50	53	56	59	61
		10	12	20	24	28	33	36	41	45	47	51	54	57	60
0	0	0	10	16	19	23	27	29	33	37	39	42	45	47	50