


| | | | | |
|--------|-------------------|----|--|------|
| 形名 | EL-S13010N/W AHTN | 電源 | | ○諸特性 |
| 出力 | 段調光 | 温度 | | |
| モード | 定格 | | | |
| オプション1 | EL-XL004 | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源 | | LED | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.3 H | | | | | |
| | B-B' | 1.1 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 0.0% | 100.0% | 100.0% | | | |
| 保守率 | | 良い | 0.780 | 普通 | 0.760 | 悪い | 0.720 |

○配光曲線図 (cd/1000lm)

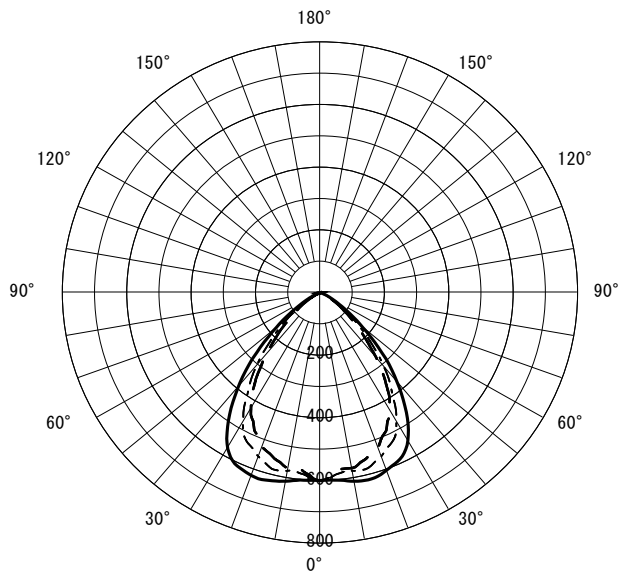

○直射水平面照度 (全光束: 9800 × 1 = 9800lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

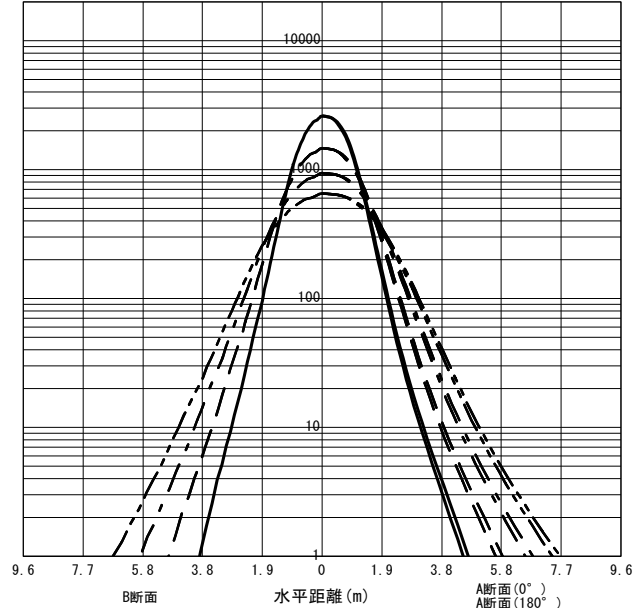

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 77 | 71 | 65 | 62 | 57 | 56 | 52 | 52 | 75 | 70 | 64 | 61 | 57 | 56 | 52 | 52 | 72 | 68 | 63 | 60 | 56 | 55 | 52 | 51 | 70 | 66 | 61 | 59 | 56 | 55 | 52 | 51 | 51 | 50 |
| 0.80 | 88 | 80 | 77 | 72 | 70 | 67 | 64 | 63 | 86 | 79 | 76 | 72 | 69 | 67 | 64 | 63 | 83 | 77 | 74 | 71 | 68 | 66 | 64 | 62 | 80 | 75 | 72 | 70 | 67 | 65 | 63 | 62 | 62 | 61 |
| 1.00 | 96 | 86 | 85 | 79 | 78 | 74 | 73 | 70 | 94 | 85 | 84 | 79 | 77 | 74 | 72 | 70 | 90 | 83 | 82 | 77 | 76 | 73 | 71 | 70 | 86 | 81 | 79 | 76 | 74 | 72 | 70 | 69 | 69 | 68 |
| 1.25 | 102 | 91 | 93 | 85 | 86 | 80 | 80 | 77 | 100 | 90 | 91 | 84 | 84 | 80 | 80 | 76 | 95 | 88 | 88 | 83 | 82 | 79 | 78 | 76 | 91 | 86 | 85 | 81 | 80 | 78 | 77 | 75 | 75 | 74 |
| 1.50 | 107 | 94 | 98 | 89 | 91 | 84 | 86 | 81 | 104 | 93 | 96 | 88 | 90 | 84 | 85 | 81 | 99 | 91 | 92 | 86 | 87 | 83 | 83 | 80 | 94 | 88 | 89 | 85 | 85 | 82 | 81 | 79 | 79 | 78 |
| 2.00 | 112 | 98 | 105 | 93 | 99 | 90 | 94 | 87 | 109 | 97 | 102 | 93 | 97 | 89 | 92 | 86 | 103 | 94 | 98 | 91 | 93 | 88 | 90 | 86 | 98 | 92 | 94 | 89 | 90 | 87 | 87 | 85 | 84 | 83 |
| 2.50 | 116 | 100 | 109 | 96 | 104 | 93 | 99 | 91 | 112 | 99 | 106 | 96 | 102 | 93 | 97 | 90 | 106 | 97 | 101 | 94 | 98 | 91 | 94 | 89 | 101 | 94 | 97 | 92 | 94 | 90 | 91 | 88 | 88 | 86 |
| 3.00 | 118 | 102 | 112 | 98 | 107 | 96 | 103 | 93 | 115 | 100 | 109 | 97 | 105 | 95 | 101 | 93 | 108 | 98 | 104 | 96 | 100 | 94 | 97 | 92 | 102 | 96 | 99 | 94 | 96 | 92 | 94 | 91 | 90 | 88 |
| 4.00 | 122 | 103 | 117 | 101 | 113 | 99 | 109 | 97 | 118 | 102 | 113 | 100 | 110 | 98 | 106 | 96 | 110 | 100 | 107 | 98 | 104 | 96 | 102 | 95 | 104 | 98 | 102 | 96 | 100 | 95 | 98 | 94 | 93 | 91 |
| 5.00 | 124 | 105 | 119 | 103 | 116 | 101 | 113 | 99 | 119 | 103 | 116 | 102 | 113 | 100 | 110 | 98 | 112 | 101 | 109 | 100 | 107 | 98 | 105 | 97 | 105 | 99 | 103 | 98 | 101 | 96 | 100 | 95 | 95 | 93 |
| 7.00 | 126 | 106 | 123 | 104 | 120 | 103 | 117 | 102 | 121 | 105 | 119 | 103 | 116 | 102 | 114 | 101 | 114 | 102 | 112 | 101 | 110 | 100 | 108 | 99 | 107 | 100 | 105 | 99 | 104 | 98 | 103 | 98 | 97 | 95 |
| 10.00 | 128 | 107 | 125 | 106 | 123 | 105 | 121 | 104 | 123 | 106 | 121 | 105 | 119 | 104 | 117 | 103 | 115 | 103 | 113 | 102 | 112 | 102 | 111 | 101 | 108 | 101 | 107 | 100 | 106 | 100 | 105 | 99 | 98 | 96 |

JIS C 8030:2014

三菱電機照明株式会社