


EL-S3002W/K


EL-X0036

○諸特性

光源		LED1370lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	0.60m	0.80m	1.00m	1.20m	
	B-B	0.60m	0.80m	1.00m	1.20m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.760	普通	0.720	悪い	0.680




○配光曲線図 (cd/1000lm)

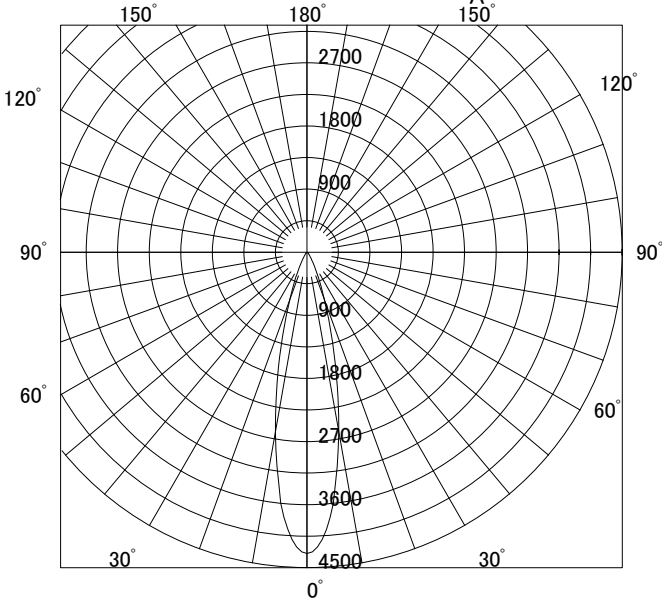

○直射水平面照度

(ランプ光束: 1370 × 1 = 1370lm/台)

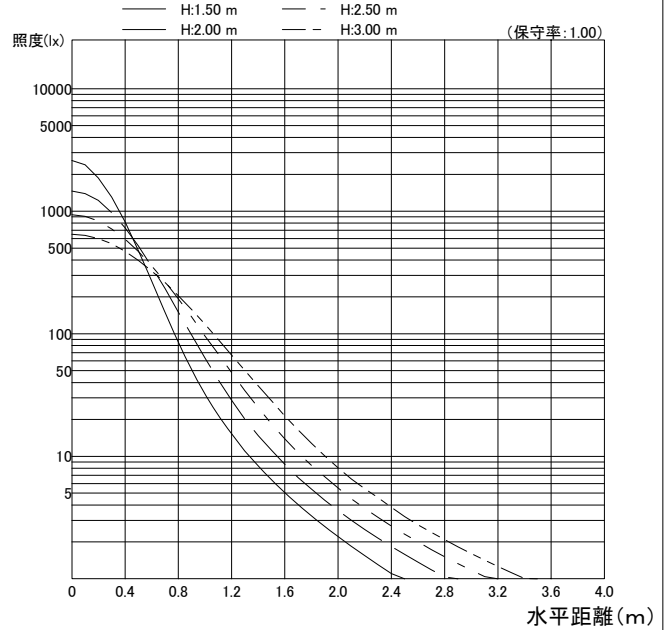

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	65	84	94	100	106	109	114	118	120	123	125	127	129
		10	61	77	85	90	94	96	99	102	103	105	106	107	108
	50	30	54	73	84	90	97	101	107	111	114	119	121	125	127
		10	52	69	78	84	89	92	96	98	100	103	104	106	107
70	30	30	48	67	77	84	90	95	101	106	110	115	118	122	126
		10	47	65	74	80	85	88	93	96	98	101	103	105	107
	10	30	44	61	70	76	82	85	90	93	96	99	102	104	106
		10	44	61	70	76	82	85	90	93	96	99	102	104	106
50	70	30	64	82	92	98	103	107	111	114	116	119	121	123	124
		10	60	76	84	89	93	95	98	100	102	103	105	106	107
	50	30	54	72	82	89	95	99	105	109	111	115	118	121	123
		10	52	69	78	83	88	91	95	97	99	102	103	105	106
30	30	30	48	66	76	83	89	93	100	104	107	112	115	119	122
		10	47	64	74	79	84	88	92	95	97	100	102	104	106
	10	30	44	61	70	76	82	85	90	93	95	99	101	103	105
		10	44	61	70	76	82	85	90	93	95	99	101	103	105
0	50	30	53	71	81	87	92	96	100	104	106	109	111	114	115
		10	51	68	77	82	87	90	93	96	98	100	101	103	104
	30	30	48	65	75	81	87	91	96	100	103	107	109	112	114
		10	47	64	73	79	84	87	91	94	96	98	100	102	104
30	30	47	65	74	80	85	89	93	96	99	102	104	106	108	
	10	47	64	72	78	83	86	90	92	94	97	99	101	102	
10	30	44	61	70	75	81	84	88	91	93	96	98	100	102	
	10	44	61	70	75	81	84	88	91	93	96	98	100	102	
0	0	0	43	60	68	74	79	82	86	89	91	94	95	98	99