


EL-S3002W/K


EL-X0031

○諸特性

光源		LED1450lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	0.37m	0.49m	0.62m	0.74m	
	B-B	0.37m	0.49m	0.62m	0.74m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.760	普通	0.720	悪い	0.680




○配光曲線図 (cd/1000lm)

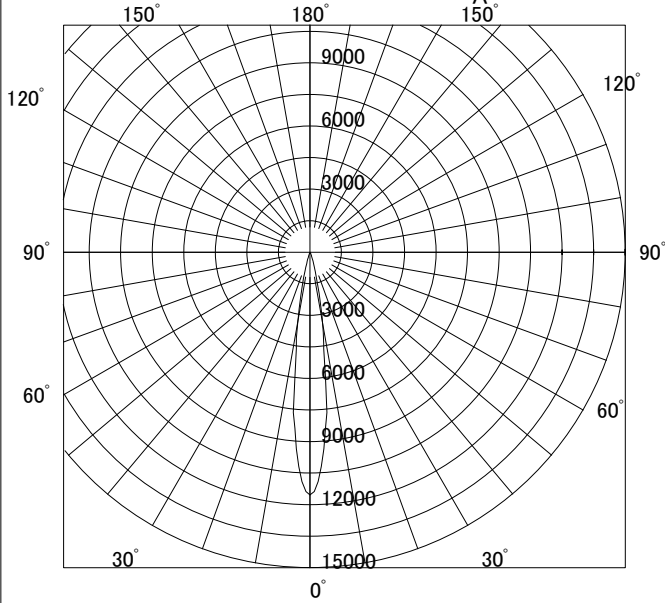

○直射水平面照度

(ランプ光束: 1450 × 1 = 1450lm/台)

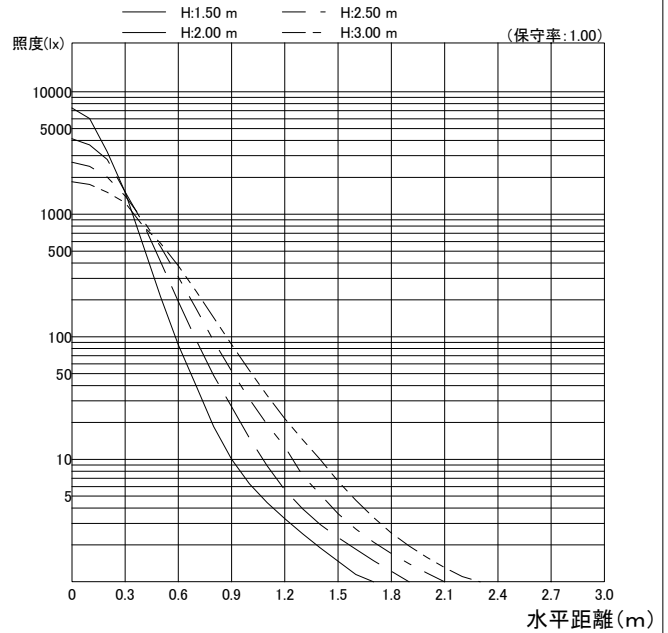

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	66	85	95	101	107	110	115	118	120	123	125	127	129
		10	62	79	86	91	95	97	100	102	103	105	106	107	108
	50	30	56	75	85	92	98	102	108	112	115	119	122	125	128
		10	54	71	80	85	90	93	96	99	101	103	105	106	108
70	30	30	50	69	79	86	92	96	102	107	110	115	119	123	126
		10	49	67	76	81	86	89	94	96	99	101	103	106	107
	50	30	65	84	93	99	104	107	112	115	117	119	121	123	125
		10	62	78	85	90	94	96	99	101	102	104	105	106	107
50	30	30	55	74	84	91	97	100	106	109	112	116	118	121	123
		10	54	71	80	85	89	92	96	98	100	102	104	105	107
	50	30	55	73	82	88	94	97	101	104	107	110	112	114	116
		10	53	70	79	84	88	91	94	97	98	100	102	103	105
30	30	30	49	68	77	83	89	92	97	101	103	107	110	113	115
		10	49	66	75	80	85	88	92	95	96	99	101	103	104
	10	10	46	63	72	78	83	86	90	93	95	98	100	102	104
0	30	30	49	67	76	82	87	90	94	97	99	102	104	107	108
		10	48	66	74	80	84	87	91	93	95	98	99	101	102
0	0	0	45	62	71	76	81	83	87	90	92	94	96	98	100