


EL-S3002W/K


EL-X0033

○諸特性

光源		LED2260lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.16m	1.54m	1.93m	2.32m	
	B-B	0.46m	0.61m	0.77m	0.92m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.760	普通	0.720	悪い	0.680




○配光曲線図 (cd/1000lm)

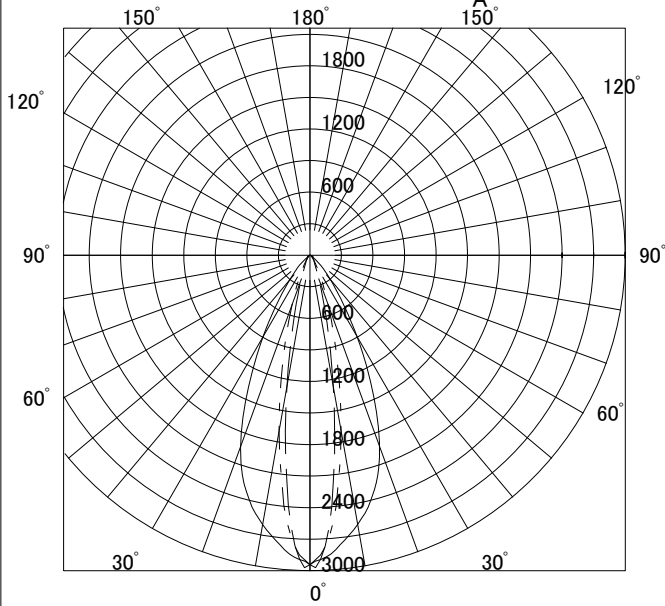

○直射水平面照度

(ランプ光束: 2260 × 1 = 2260lm/台)

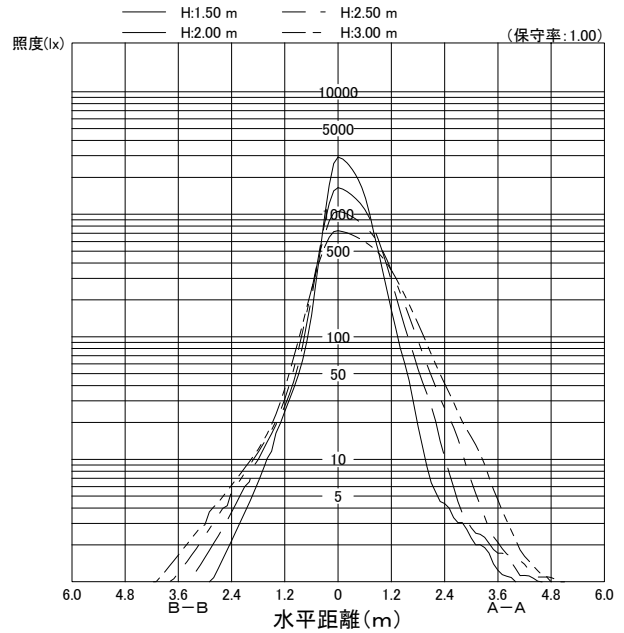

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	63	82	92	99	105	109	114	117	119	123	125	127	129
		10	59	76	84	89	93	96	99	101	102	104	105	107	108
	50	30	52	71	82	89	96	100	106	111	114	118	121	124	127
		10	51	68	77	82	88	91	95	98	100	102	104	106	107
70	30	30	46	64	75	82	89	94	100	105	109	114	118	122	125
		10	45	63	72	78	83	87	92	95	97	100	102	105	106
	50	30	62	80	90	97	102	106	111	114	116	119	120	123	124
		10	59	75	83	88	92	95	98	100	101	103	104	106	107
50	30	30	52	70	81	88	94	98	104	108	111	115	117	120	123
		10	50	67	76	82	87	90	94	97	99	101	103	105	106
	50	30	46	64	74	81	88	92	99	103	107	111	114	118	121
		10	45	62	72	78	83	86	91	94	96	100	101	104	105
30	30	30	51	69	79	85	91	95	100	103	105	109	111	113	115
		10	50	66	75	81	86	89	93	95	97	99	101	103	104
	30	30	46	63	73	80	86	90	95	99	102	106	108	112	114
		10	45	62	71	77	82	86	90	93	95	98	100	102	104
0	0	30	45	63	72	78	84	87	92	96	98	101	103	106	108
		10	45	62	71	76	81	85	89	92	94	96	98	100	102
0	0	0	41	57	66	72	77	81	85	88	90	93	95	97	99