


形名	EL-S30041N/M 2AHJ	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.5 H					
	B-B'	0.5 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

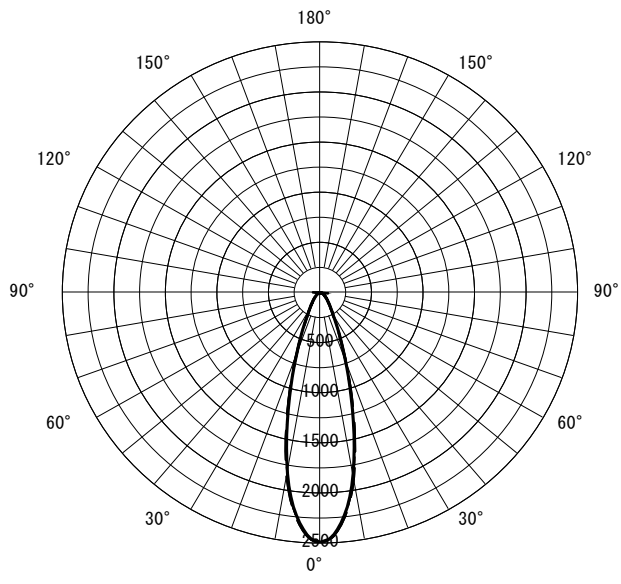

○直射水平面照度 (全光束 : 30500 × 1 = 30500lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

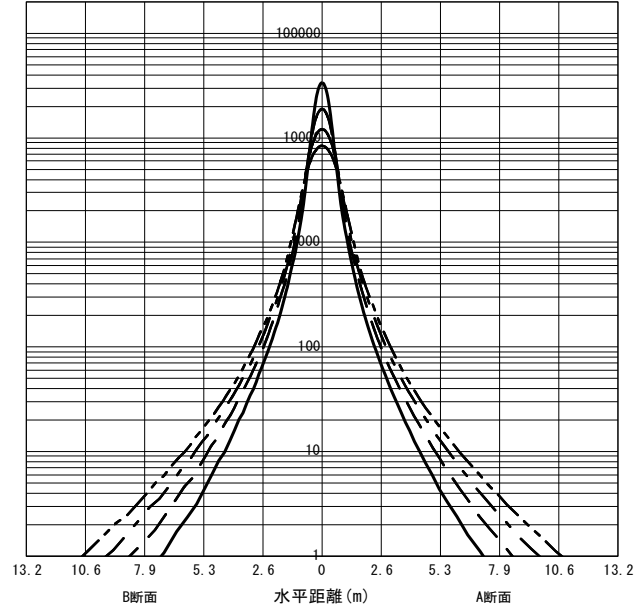

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	87	80	77	73	70	68	66	65	85	79	76	73	70	68	66	65	83	78	75	72	69	68	66	65	81	76	73	71	69	67	65	65	65	64				
0.80	95	87	85	80	79	76	74	73	94	86	84	80	78	75	74	72	90	84	83	79	77	75	73	72	87	82	81	78	76	74	73	72	72	71				
1.00	101	91	92	85	85	81	80	78	99	90	90	84	84	80	80	77	95	88	88	83	83	80	79	77	91	86	86	82	81	79	78	77	76	75				
1.25	106	94	97	89	91	85	86	82	104	93	96	89	90	85	85	82	99	91	93	87	88	84	84	81	95	90	90	86	86	83	83	81	81	79				
1.50	110	97	102	92	95	89	91	86	107	96	100	91	94	88	90	85	102	94	96	90	91	87	88	85	97	92	93	89	89	86	86	84	84	82				
2.00	115	100	108	96	102	93	97	90	112	99	105	95	100	92	96	90	106	97	101	94	97	91	93	89	101	95	97	92	94	90	91	88	88	86				
2.50	118	102	112	99	107	96	102	94	114	101	109	98	104	95	101	93	108	98	104	96	100	94	97	92	103	96	99	94	96	93	94	91	90	89				
3.00	120	103	115	100	110	98	106	96	116	102	111	99	107	97	104	95	110	100	106	98	103	96	100	94	104	98	101	96	99	94	96	93	92	91				
4.00	123	105	118	102	114	100	111	99	119	103	115	101	112	100	108	98	112	101	109	100	106	98	104	97	106	99	103	98	101	97	99	95	95	93				
5.00	125	106	121	104	117	102	114	101	121	104	117	103	114	101	112	100	113	102	111	101	108	100	106	98	107	100	105	99	103	98	101	97	96	94				
7.00	127	107	124	105	121	104	119	103	122	105	120	104	118	103	115	102	115	103	113	102	111	101	109	100	108	101	106	100	105	99	104	99	98	96				
10.00	128	107	126	106	124	106	122	105	124	106	122	105	120	105	119	104	116	104	114	103	113	103	112	102	109	102	108	101	107	101	106	100	99	97				

JIS C 8030:2014

三菱電機照明株式会社