


形名	EL-S40041N/W 2AHJ	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.9 H					
	B-B'	0.9 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

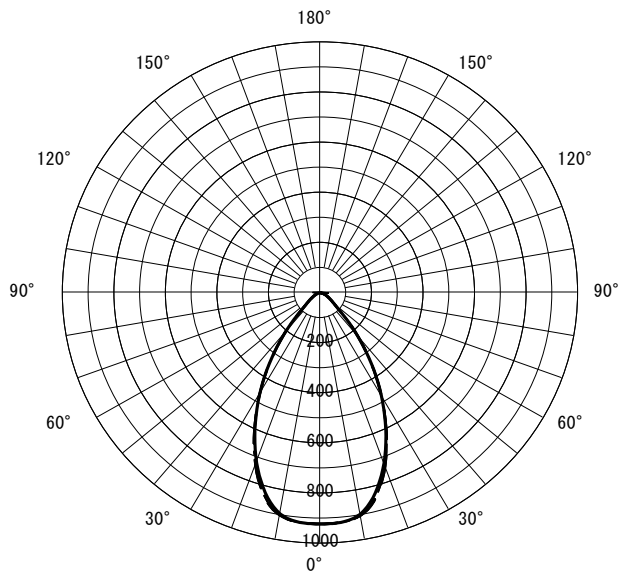

○直射水平面照度 (全光束: 40100 × 1 = 40100lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

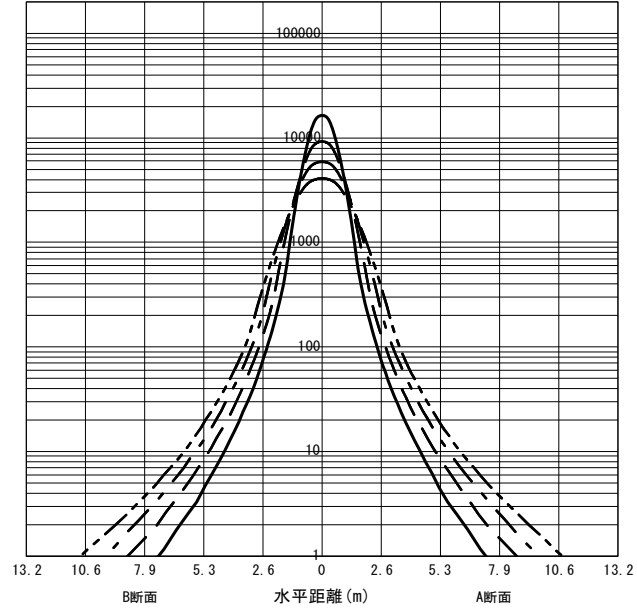

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	85	79	75	71	69	67	64	63	84	78	74	71	68	66	64	63	81	76	73	70	68	66	64	63	79	75	72	69	67	66	63	63	63	63	62							
0.80	95	86	85	79	78	75	73	72	93	85	84	79	77	75	73	72	89	83	82	78	76	74	72	71	86	82	80	77	75	74	72	71	71	71	70							
1.00	101	90	91	85	85	80	80	77	99	89	90	84	84	80	79	77	95	88	87	83	82	79	78	77	91	86	85	82	81	79	77	76	76	75								
1.25	106	94	97	89	91	85	86	82	103	93	95	88	90	85	85	82	99	91	92	87	88	84	84	81	95	89	90	86	86	83	82	81	81	79								
1.50	110	97	101	92	95	88	91	85	107	95	99	91	94	88	90	85	102	93	96	90	91	87	88	85	97	92	93	88	89	86	86	84	84	82								
2.00	115	100	107	96	102	93	97	90	111	99	105	95	100	92	96	90	106	96	101	93	97	91	93	89	100	94	97	92	93	90	91	88	88	86								
2.50	118	102	111	98	106	96	102	93	114	100	109	97	104	95	100	93	108	98	104	96	100	94	97	92	102	96	99	94	96	92	94	91	90	89								
3.00	120	103	114	100	110	98	106	96	116	102	111	99	107	97	104	95	109	99	106	97	103	95	100	94	104	97	101	96	98	94	96	93	92	91								
4.00	123	104	118	102	114	100	111	99	119	103	115	101	111	99	108	98	111	101	109	99	106	98	104	96	105	99	103	98	101	96	99	95	95	93								
5.00	124	105	121	103	117	102	114	100	120	104	117	102	114	101	111	100	113	102	110	101	108	99	106	98	106	100	104	99	103	98	101	97	96	94								
7.00	126	106	124	105	121	104	118	103	122	105	120	104	117	103	115	102	114	103	112	102	111	101	109	100	107	101	106	100	105	99	104	98	98	96								
10.00	128	107	126	106	124	105	122	104	123	106	122	105	120	104	118	103	115	104	114	103	113	102	111	102	108	101	107	101	106	100	105	100	99	97								

JIS C 8030:2014

三菱電機照明株式会社