


形名	EL-S4010L/H AHTN	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.4 H					
	B-B'	1.4 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.780	普通	0.760	悪い	0.720

○配光曲線図 (cd/1000lm)

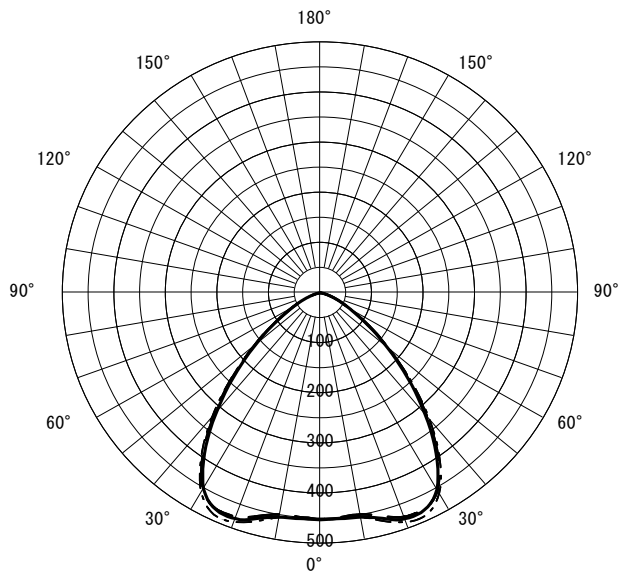

○直射水平面照度 (全光束: 3700 × 1 = 3700lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

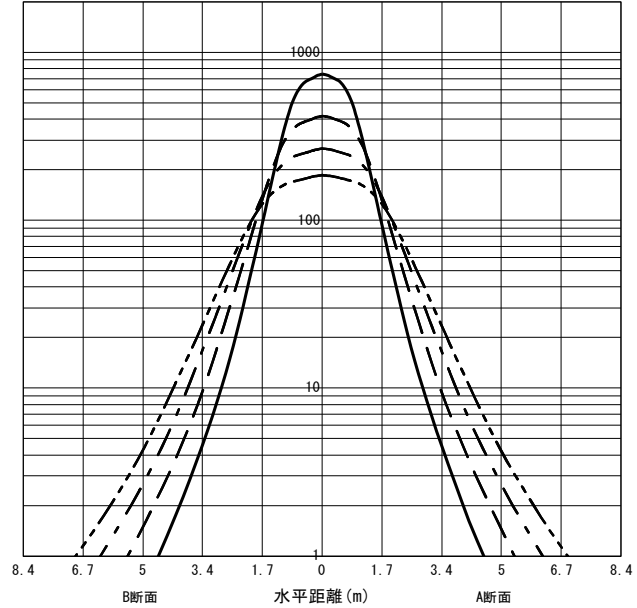

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	72	66	59	56	51	50	46	45	70	65	58	56	51	50	46	45	67	63	57	55	50	49	46	45	65	61	56	54	50	49	45	45	45	43				
0.80	84	77	72	68	64	61	58	57	82	75	71	67	63	61	58	57	79	73	69	66	62	61	58	57	75	71	67	65	61	60	57	56	56	55				
1.00	92	83	81	75	73	69	67	65	90	82	79	74	72	69	67	65	86	79	77	73	71	68	66	64	82	77	75	72	69	67	65	64	64	62				
1.25	99	88	89	81	81	76	75	72	97	87	87	80	80	75	75	72	92	85	84	79	78	75	73	71	87	82	81	78	76	74	72	71	70	69				
1.50	104	92	94	85	87	81	81	77	101	90	92	85	85	80	80	76	96	88	89	83	83	79	79	76	91	86	85	81	81	78	77	75	75	73				
2.00	110	96	102	91	95	87	90	83	107	95	99	90	93	86	89	83	101	92	95	88	90	85	86	82	96	90	91	87	87	84	84	81	81	79				
2.50	114	99	107	94	101	91	96	88	111	97	104	93	99	90	94	87	104	95	99	92	95	89	91	86	99	93	95	90	91	87	88	85	85	83				
3.00	117	100	111	97	105	94	101	91	113	99	108	96	103	93	99	90	106	97	102	94	98	91	95	89	100	94	97	92	94	90	91	88	88	86				
4.00	121	103	115	100	111	97	107	95	117	101	112	99	108	96	104	94	109	99	106	97	103	95	100	93	103	97	100	95	98	93	96	92	91	89				
5.00	123	104	118	102	114	99	111	98	118	103	115	100	111	99	108	97	111	100	108	98	105	97	103	95	104	98	102	96	100	95	98	94	93	91				
7.00	125	105	122	104	119	102	116	101	121	104	118	102	115	101	113	100	113	102	111	100	109	99	107	98	106	99	104	98	103	97	101	96	96	94				
10.00	127	106	125	105	122	104	120	103	123	105	120	104	118	103	117	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	98	98	96				

JIS C 8030:2014

三菱電機照明株式会社