


|        |                 |    |  |      |
|--------|-----------------|----|--|------|
| 形名     | EL-S6000L/K AHN | 電源 |  | ○諸特性 |
| 出力     | 固定出力            | 温度 |  |      |
| モード    |                 |    |  |      |
| オプション1 |                 |    |  |      |
| オプション2 |                 |    |  |      |
| オプション3 |                 |    |  |      |
| オプション4 |                 |    |  |      |
| オプション5 |                 |    |  |      |




|                |      |       |       |       |       |
|----------------|------|-------|-------|-------|-------|
| 光源             |      | LED   |       |       |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |       |       |       |
|                | A-A' | 1.1 H |       |       |       |
|                | B-B' | 1.1 H |       |       |       |
| 器具効率           |      | 上方光束  | 下方光束  | 計     |       |
| 保守率            |      | 良い    | 普通    | 悪い    |       |
|                |      | 0.690 | 0.670 | 99.7% | 0.630 |

○配光曲線図 (cd/1000lm)

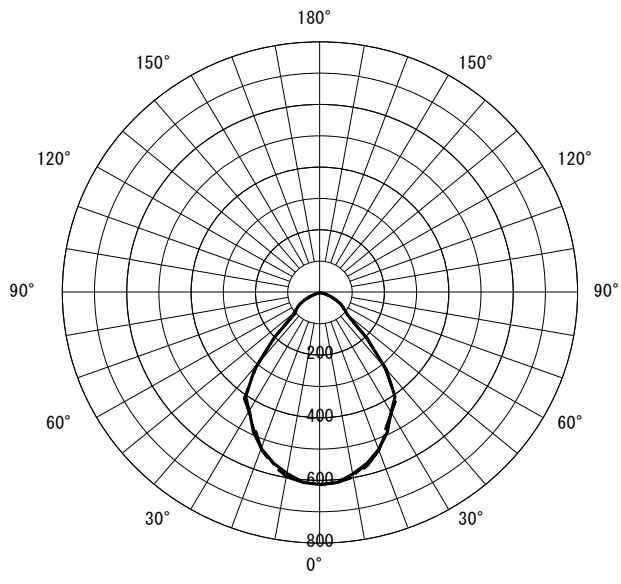

○直射水平面照度 (全光束: 5600 × 1 = 5600lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

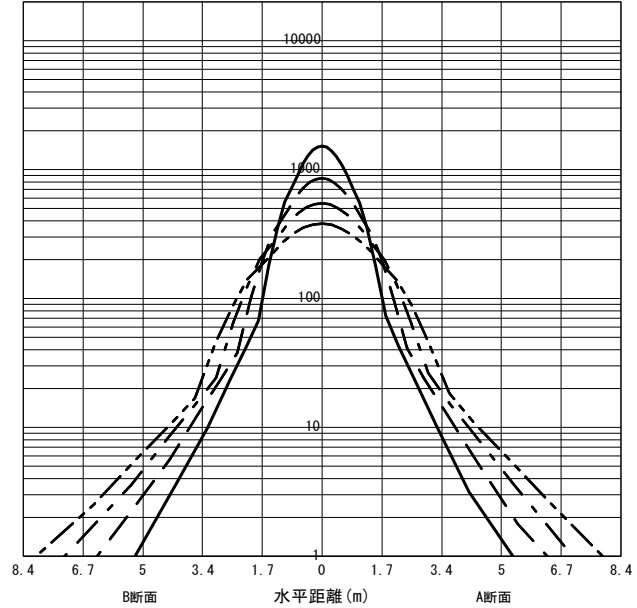

| 反射率 (%) |                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |    |    |    |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|----|----|
| 天井      | 80              |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 20  | 0   |     |     |     |     |     |     |     |     |     |     |     |    |     |    |    |    |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 10  | 0   |     |     |     |     |     |     |     |    |     |    |    |    |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 0  |    |    |
| 室指数     | 作業面照明率 (× 0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |    |    |    |
| 0.60    | 75              | 69  | 63  | 60  | 55  | 54  | 50  | 49  | 73  | 68  | 62  | 59  | 55  | 53  | 50  | 49  | 70  | 66  | 61  | 58  | 54  | 53  | 50  | 49  | 68  | 64  | 59  | 57  | 54  | 53 | 49  | 49 | 49 | 47 |
| 0.80    | 86              | 78  | 74  | 70  | 67  | 64  | 61  | 60  | 84  | 77  | 73  | 69  | 66  | 64  | 61  | 60  | 80  | 75  | 71  | 68  | 65  | 63  | 60  | 59  | 77  | 73  | 70  | 67  | 64  | 63 | 60  | 59 | 59 | 57 |
| 1.00    | 94              | 84  | 82  | 76  | 75  | 71  | 69  | 67  | 91  | 83  | 81  | 76  | 74  | 71  | 69  | 67  | 87  | 81  | 78  | 74  | 72  | 70  | 68  | 66  | 83  | 78  | 76  | 73  | 71  | 69 | 67  | 66 | 66 | 64 |
| 1.25    | 100             | 89  | 90  | 82  | 82  | 77  | 77  | 73  | 97  | 88  | 88  | 81  | 81  | 77  | 76  | 73  | 93  | 85  | 85  | 80  | 79  | 76  | 75  | 72  | 88  | 83  | 82  | 79  | 77  | 75 | 73  | 72 | 72 | 70 |
| 1.50    | 104             | 92  | 95  | 86  | 88  | 81  | 82  | 78  | 102 | 91  | 93  | 85  | 86  | 81  | 81  | 77  | 96  | 88  | 89  | 84  | 84  | 80  | 80  | 77  | 92  | 86  | 86  | 82  | 82  | 79 | 78  | 76 | 76 | 74 |
| 2.00    | 111             | 96  | 102 | 91  | 96  | 87  | 91  | 84  | 107 | 95  | 100 | 90  | 94  | 87  | 89  | 84  | 101 | 92  | 95  | 89  | 91  | 85  | 87  | 83  | 96  | 90  | 91  | 87  | 88  | 84 | 84  | 82 | 82 | 80 |
| 2.50    | 114             | 99  | 107 | 95  | 101 | 91  | 96  | 88  | 111 | 97  | 104 | 94  | 99  | 90  | 95  | 88  | 104 | 95  | 99  | 92  | 95  | 89  | 92  | 87  | 99  | 93  | 95  | 90  | 91  | 88 | 89  | 86 | 85 | 84 |
| 3.00    | 117             | 100 | 111 | 97  | 105 | 94  | 101 | 91  | 113 | 99  | 108 | 96  | 103 | 93  | 99  | 91  | 106 | 97  | 102 | 94  | 98  | 92  | 95  | 89  | 100 | 94  | 97  | 92  | 94  | 90 | 92  | 88 | 88 | 86 |
| 4.00    | 120             | 102 | 115 | 100 | 111 | 97  | 107 | 95  | 116 | 101 | 112 | 99  | 108 | 96  | 104 | 94  | 109 | 99  | 106 | 97  | 103 | 95  | 100 | 93  | 103 | 97  | 100 | 95  | 98  | 93 | 96  | 92 | 91 | 89 |
| 5.00    | 122             | 104 | 118 | 101 | 114 | 99  | 111 | 97  | 118 | 102 | 114 | 100 | 111 | 98  | 108 | 97  | 111 | 100 | 108 | 98  | 105 | 97  | 103 | 95  | 104 | 98  | 102 | 96  | 100 | 95 | 98  | 94 | 93 | 91 |
| 7.00    | 125             | 105 | 122 | 103 | 119 | 102 | 116 | 100 | 120 | 104 | 118 | 102 | 115 | 101 | 113 | 100 | 113 | 101 | 110 | 100 | 108 | 99  | 107 | 98  | 106 | 99  | 104 | 98  | 103 | 97 | 101 | 96 | 95 | 94 |
| 10.00   | 127             | 106 | 124 | 105 | 122 | 104 | 120 | 103 | 122 | 105 | 120 | 104 | 118 | 103 | 116 | 102 | 114 | 102 | 112 | 102 | 111 | 101 | 110 | 100 | 107 | 100 | 106 | 100 | 105 | 99 | 104 | 98 | 97 | 95 |

JIS C 8030:2014

三菱電機照明株式会社