


形名	EL-S8010N/H AHTN	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1	EL-XL004			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.780	普通	0.760	悪い	0.720

○配光曲線図 (cd/1000lm)

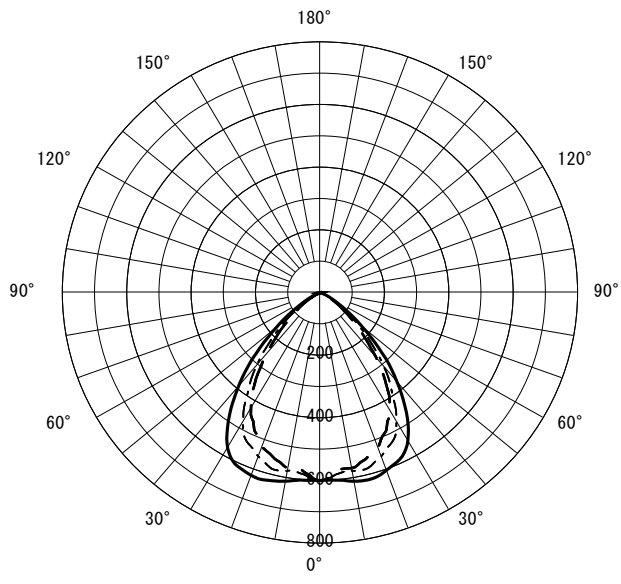

○直射水平面照度 (全光束: 6300 × 1 = 6300lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

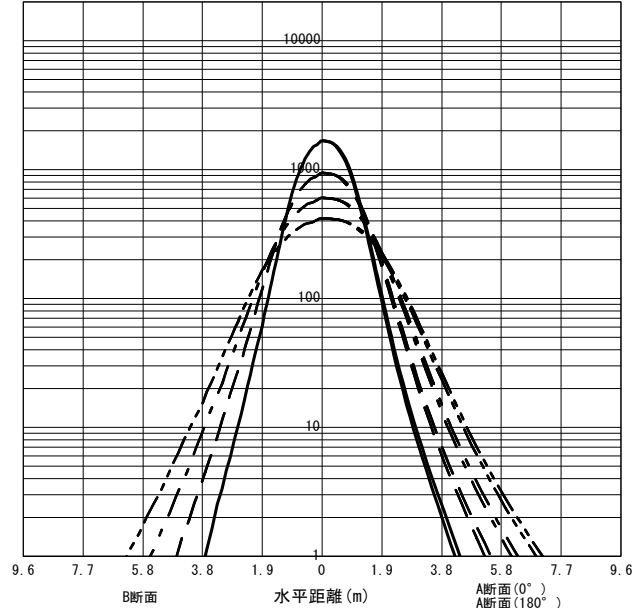

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	77	71	65	62	57	56	52	52	75	70	64	61	57	56	52	52	72	68	63	60	56	55	52	51	70	66	61	59	56	55	52	51	51	50				
0.80	88	80	77	72	70	67	64	63	86	79	76	72	69	67	64	63	83	77	74	71	68	66	64	62	80	75	72	70	67	65	63	62	62	61				
1.00	96	86	85	79	78	74	73	70	94	85	84	79	77	74	72	70	90	83	82	77	76	73	71	70	86	81	79	76	74	72	70	69	69	68				
1.25	102	91	93	85	86	80	80	77	100	90	91	84	84	80	80	76	95	88	88	83	82	79	78	76	91	86	85	81	80	78	77	75	75	74				
1.50	107	94	98	89	91	84	86	81	104	93	96	88	90	84	85	81	99	91	92	86	87	83	83	80	94	88	89	85	85	82	81	79	79	78				
2.00	112	98	105	93	99	90	94	87	109	97	102	93	97	89	92	86	103	94	98	91	93	88	90	86	98	92	94	89	90	87	87	85	84	83				
2.50	116	100	109	96	104	93	99	91	112	99	106	96	102	93	97	90	106	97	101	94	98	91	94	89	101	94	97	92	94	90	91	88	88	86				
3.00	118	102	112	98	107	96	103	93	115	100	109	97	105	95	101	93	108	98	104	96	100	94	97	92	102	96	99	94	96	92	94	91	90	88				
4.00	122	103	117	101	113	99	109	97	118	102	113	100	110	98	106	96	110	100	107	98	104	96	102	95	104	98	102	96	100	95	98	94	93	91				
5.00	124	105	119	103	116	101	113	99	119	103	116	102	113	100	110	98	112	101	109	100	107	98	105	97	105	99	103	98	101	96	100	95	95	93				
7.00	126	106	123	104	120	103	117	102	121	105	119	103	116	102	114	101	114	102	112	101	110	100	108	99	107	100	105	99	104	98	103	98	97	95				
10.00	128	107	125	106	123	105	121	104	123	106	121	105	119	104	117	103	115	103	113	102	112	102	111	101	108	101	107	100	106	100	105	99	98	96				

JIS C 8030:2014

三菱電機照明株式会社