


形名	EL-S8010N/H AHTN	電源		○諸特性
出力	段調光	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.780	普通	0.760	悪い	0.720

○配光曲線図 (cd/1000lm)

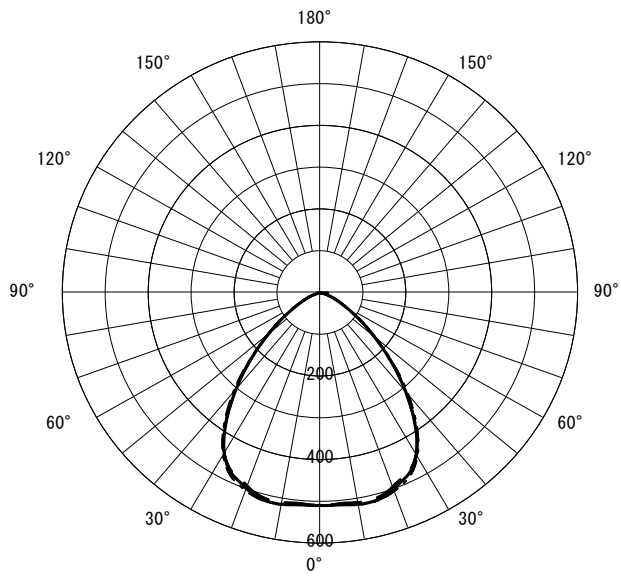

○直射水平面照度 (全光束: 8000 × 1 = 8000lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

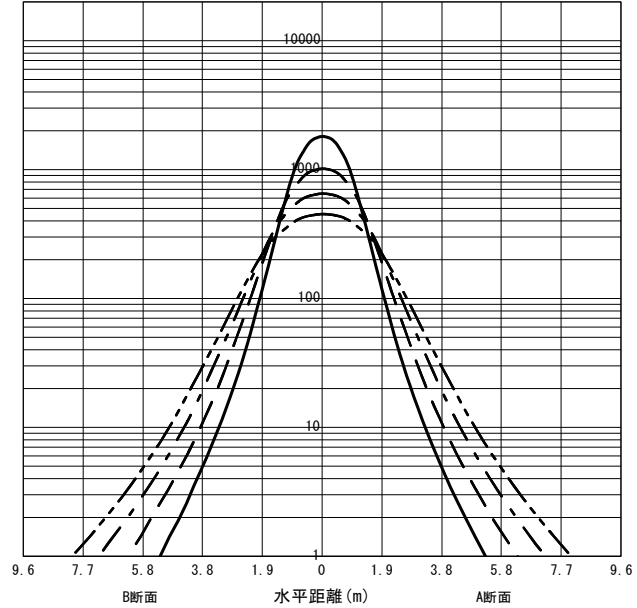

反射率 (%)																																							
天井	80								70								50								30								20	0					
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0									
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	作業面照明率 (× 0.01)																																						
0.60	73	68	61	58	53	51	48	47	72	66	60	57	53	51	48	47	69	64	58	56	52	51	47	47	66	63	57	55	51	50	47	47	47	45					
0.80	85	78	73	69	65	63	60	58	83	76	72	68	65	62	59	58	80	74	70	67	64	62	59	58	76	72	68	66	63	61	58	58	58	56					
1.00	93	84	82	76	74	70	68	66	91	82	80	75	73	70	68	66	87	80	78	74	72	69	67	65	83	78	76	73	70	68	66	65	65	63					
1.25	100	89	89	82	82	77	76	73	97	88	88	81	81	76	76	73	92	85	85	80	79	75	74	72	88	83	82	78	77	75	73	72	71	70					
1.50	105	92	95	86	88	81	82	77	102	91	93	85	86	81	81	77	96	88	89	84	84	80	79	77	92	86	86	82	81	79	78	76	76	74					
2.00	111	96	102	91	96	87	91	84	107	95	100	91	94	87	89	84	101	93	96	89	91	86	87	83	96	90	92	87	88	84	84	82	82	80					
2.50	115	99	107	95	102	91	97	88	111	98	105	94	99	91	95	88	105	95	100	92	95	89	92	87	99	93	95	90	92	88	89	86	85	84					
3.00	117	101	111	97	106	94	101	91	114	99	108	96	103	93	99	91	107	97	102	94	99	92	95	90	101	95	97	92	94	90	92	89	88	86					
4.00	121	103	116	100	111	98	107	95	117	101	112	99	108	97	105	95	109	99	106	97	103	95	100	93	103	97	100	95	98	93	96	92	91	90					
5.00	123	104	119	102	115	100	111	98	119	103	115	101	111	99	108	97	111	100	108	99	106	97	103	96	105	98	102	97	100	95	99	94	93	92					
7.00	125	105	122	104	119	102	116	101	121	104	118	103	115	101	113	100	113	102	111	101	109	99	107	98	106	100	104	99	103	98	102	97	96	94					
10.00	127	106	125	105	123	104	120	103	123	105	121	104	119	103	117	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	99	98	96					

JIS C 8030:2014

三菱電機照明株式会社