



形名	EL-SE2603C/S	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				



光源		LDA4L-G/40/S-A					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	30.9%	30.9%			
保守率		良い	0.690	普通	0.670	悪い	0.630


○配光曲線図 (cd/1000lm)

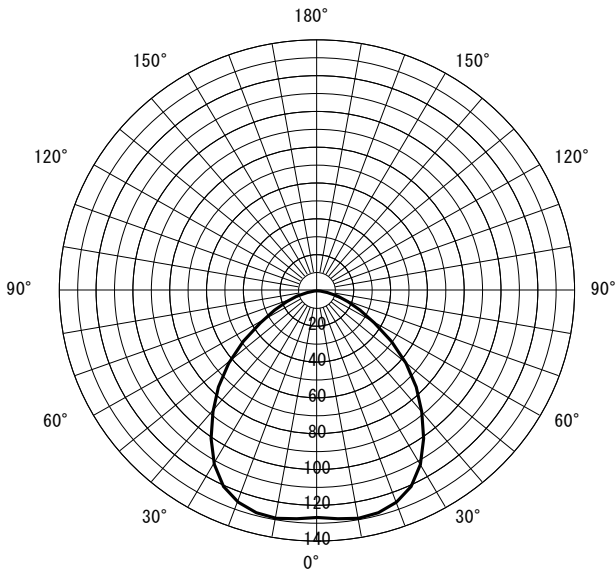

○直射水平面照度

(全光束 : 485 × 1 = 485lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

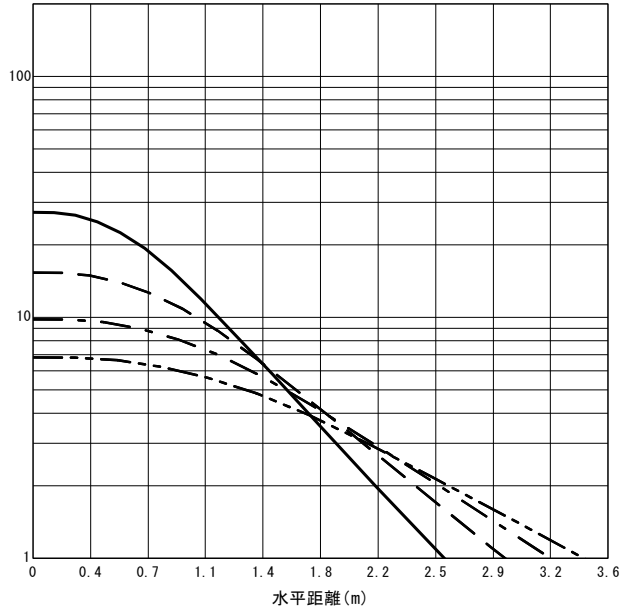

反射率 (%)																																		
天井	80								70				50				30				20	0												
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																	
0.60	21	19	17	16	14	14	12	12	20	19	16	16	14	13	12	12	19	18	16	15	14	13	12	12	18	18	15	15	13	13	12	12	12	11
0.80	25	22	20	19	18	17	16	15	24	22	20	19	18	17	16	15	23	21	19	19	17	17	16	15	22	20	19	18	17	17	15	15	15	15
1.00	27	24	23	22	20	19	19	18	26	24	23	21	20	19	18	18	25	23	22	21	20	19	18	18	24	22	21	20	19	19	18	18	18	17
1.25	29	26	26	24	23	22	21	20	29	26	25	23	23	22	21	20	27	25	24	23	22	21	21	20	26	24	23	22	22	21	20	20	20	19
1.50	31	27	28	25	25	23	23	22	30	27	27	25	25	23	23	22	28	26	26	24	24	23	22	22	27	25	25	24	23	22	22	21	21	21
2.00	33	29	30	27	28	25	26	24	32	28	29	27	27	25	26	24	30	28	28	26	26	25	25	24	28	27	27	26	25	24	24	24	23	23
2.50	34	30	32	28	30	27	28	26	33	29	31	28	29	27	28	26	31	28	29	27	28	26	27	25	29	28	28	27	27	26	26	25	25	24
3.00	35	30	33	29	31	28	30	27	34	30	32	29	31	28	29	27	32	29	31	28	29	27	28	26	30	28	29	27	28	27	27	26	26	25
4.00	37	31	35	30	33	29	32	28	35	31	34	30	32	29	31	28	33	30	32	29	31	28	30	28	31	29	30	29	29	28	28	27	27	27
5.00	37	32	36	31	35	30	33	29	36	31	35	30	34	30	32	29	34	30	33	30	32	29	31	29	32	30	31	29	30	29	29	28	28	27
7.00	38	32	37	32	36	31	35	30	37	32	36	31	35	31	34	30	34	31	34	31	33	30	32	30	32	30	32	30	31	30	31	29	29	28
10.00	39	33	38	32	37	32	37	31	38	32	37	32	36	31	35	31	35	31	34	31	34	31	33	30	33	31	32	30	32	30	32	30	30	29

JIS C 8030:2014

三菱電機照明株式会社