


形名	EL-SL20023WW/K 1HN	電源		○諸特性
出力	固定出力	温度		
モード	定格			
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.5 H					
	B-B'	0.5 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.670	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

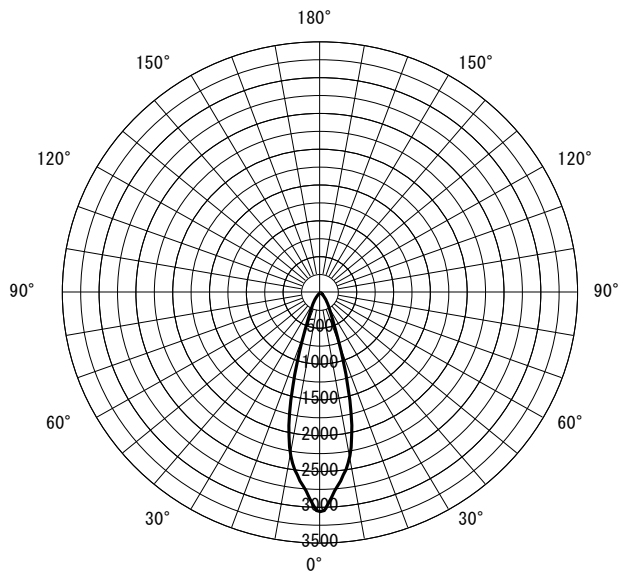

○直射水平面照度 (全光束: 2130 × 1 = 2130lm/台)

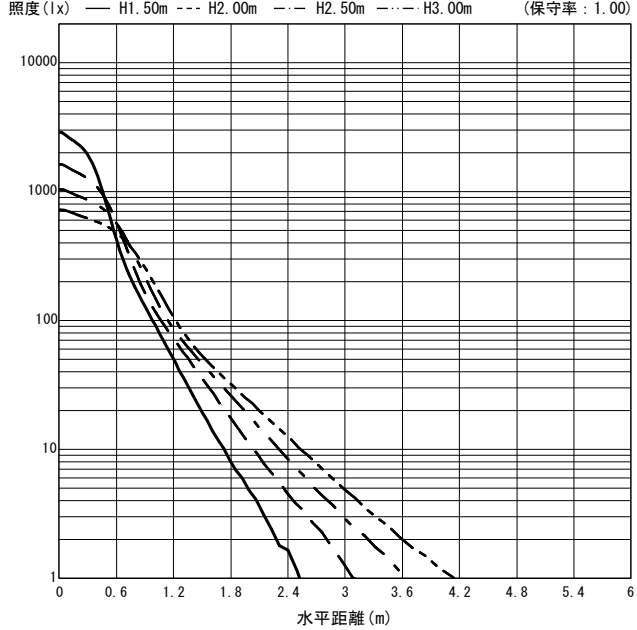

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	94	87	85	81	80	77	76	75	93	86	84	81	79	77	76	75	90	85	83	80	79	77	75	75	88	84	82	79	78	77	75	74	74	73								
0.80	102	92	93	87	87	84	83	81	100	92	92	87	87	84	83	81	97	90	90	86	86	83	82	81	94	89	88	85	85	83	82	81	81	80								
1.00	107	96	98	91	93	88	89	86	104	95	97	91	92	88	88	85	101	93	95	90	90	87	87	85	97	92	92	89	89	87	86	85	84	83								
1.25	111	99	103	95	98	92	94	89	108	98	102	94	97	91	93	89	104	96	99	93	95	91	91	89	100	94	96	92	92	90	90	88	88	87								
1.50	114	100	107	97	102	94	97	92	111	99	105	96	100	94	96	92	106	98	101	95	97	93	94	91	102	96	98	94	95	92	92	90	90	89								
2.00	118	103	112	100	107	98	103	96	115	102	109	99	105	97	102	95	109	100	105	98	102	96	99	94	104	98	101	96	98	95	96	93	93	92								
2.50	121	104	115	102	111	100	107	98	117	103	112	101	108	99	105	97	111	101	107	99	104	98	102	96	106	99	103	98	101	96	99	95	95	93								
3.00	122	105	118	103	113	101	110	100	119	104	114	102	111	100	108	99	112	102	109	100	106	99	104	98	106	100	104	99	102	98	100	97	96	95								
4.00	125	106	121	104	117	103	114	102	121	105	117	104	114	102	112	101	114	103	111	102	109	101	107	100	108	101	106	100	104	99	102	98	98	96								
5.00	126	107	123	105	120	104	117	103	122	106	119	104	117	103	114	102	115	104	113	103	111	102	109	101	108	102	107	101	105	100	104	99	99	97								
7.00	128	107	125	107	123	106	121	105	123	106	121	105	119	105	117	104	116	104	114	104	113	103	111	102	109	102	108	102	107	101	106	101	100	98								
10.00	129	108	127	107	126	107	124	106	125	107	123	106	122	106	120	105	116	105	115	104	114	104	113	103	109	103	109	102	108	102	107	101	101	99								

JIS C 8030:2014

三菱電機照明株式会社