


形名	EL-SL30023L/K 1HTN	電源		○諸特性
出力	段階調光	温度		
モード	定格			
オプション1	EL-X110K			
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	0.9 H					
	B-B'	0.5 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.670	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

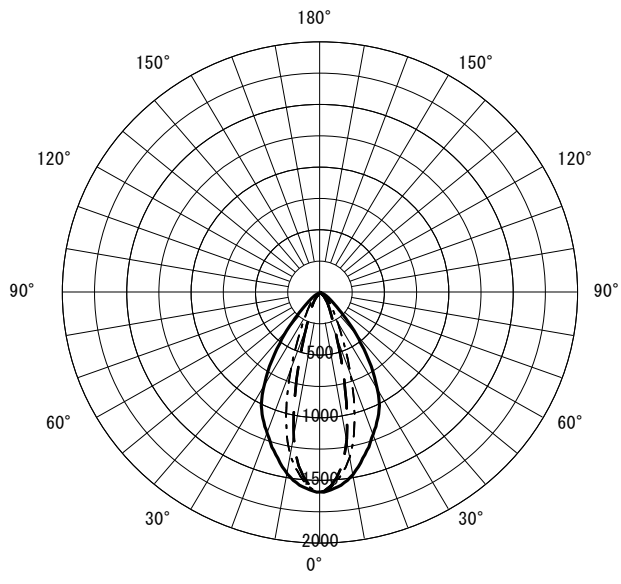

○直射水平面照度 (全光束: 2695 × 1 = 2695lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · - H3.00m (保守率: 1.00)

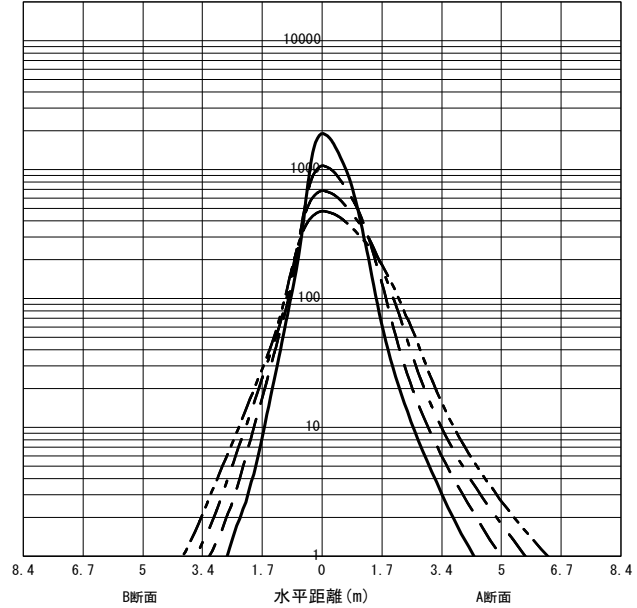

反射率 (%)																																																		
天井	80								70								50								30								20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																																	
0.60	83	76	72	68	65	63	61	60	81	75	71	68	65	63	60	60	79	74	70	67	64	63	60	59	76	72	69	66	63	62	60	59	59	58																
0.80	93	84	82	77	75	72	70	69	91	83	81	77	75	72	70	69	87	81	79	76	74	71	69	68	84	80	77	75	73	71	69	68	68	67																
1.00	99	89	89	83	82	78	77	75	97	88	88	82	82	78	77	75	93	86	85	81	80	77	76	74	89	84	83	80	79	76	75	74	74	72																
1.25	105	93	96	88	89	83	84	80	102	92	94	87	88	83	83	80	98	90	91	86	86	82	82	79	93	88	88	84	84	81	80	79	79	77																
1.50	109	96	100	91	94	87	89	84	106	95	98	90	93	87	88	84	101	93	95	89	90	86	86	83	96	91	91	87	88	85	84	82	82	81																
2.00	114	99	107	95	101	92	96	89	111	98	104	94	99	91	95	89	105	96	100	93	96	90	92	88	100	94	96	91	93	89	90	87	87	85																
2.50	117	101	111	98	106	95	101	93	114	100	108	97	104	94	100	92	107	98	103	95	99	93	96	91	102	96	99	94	96	92	93	90	90	88																
3.00	120	103	114	100	109	97	105	95	116	101	111	99	107	96	103	94	109	99	105	97	102	95	99	93	103	97	100	95	98	94	96	92	92	90																
4.00	123	104	118	102	114	100	110	98	119	103	115	101	111	99	108	98	111	101	108	99	106	98	103	96	105	99	103	97	101	96	99	95	94	93																
5.00	124	105	120	103	117	102	114	100	120	104	117	102	114	101	111	99	113	102	110	100	108	99	106	98	106	100	104	99	103	97	101	97	96	94																
7.00	126	106	124	105	121	104	118	103	122	105	120	104	117	103	115	102	114	103	112	102	111	101	109	100	107	101	106	100	105	99	103	98	98	96																
10.00	128	107	126	106	124	105	122	104	124	106	122	105	120	104	118	103	115	104	114	103	113	102	111	102	108	102	107	101	106	100	105	100	99	97																

JIS C 8030:2014

三菱電機照明株式会社