


|        |                    |    |  |      |
|--------|--------------------|----|--|------|
| 形名     | EL-SL30023W/W 1HTN | 電源 |  | ○諸特性 |
| 出力     | 段調光                | 温度 |  |      |
| モード    | 定格                 |    |  |      |
| オプション1 | EL-X109W           |    |  |      |
| オプション2 |                    |    |  |      |
| オプション3 |                    |    |  |      |
| オプション4 |                    |    |  |      |
| オプション5 |                    |    |  |      |




|                |      |       |        |        |       |    |       |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源             |      | LED   |        |        |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |        |        |       |    |       |
|                | A-A' | 0.5 H |        |        |       |    |       |
|                | B-B' | 0.5 H |        |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束   | 計      |       |    |       |
|                |      | 0.0%  | 100.0% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.670  | 普通     | 0.630 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

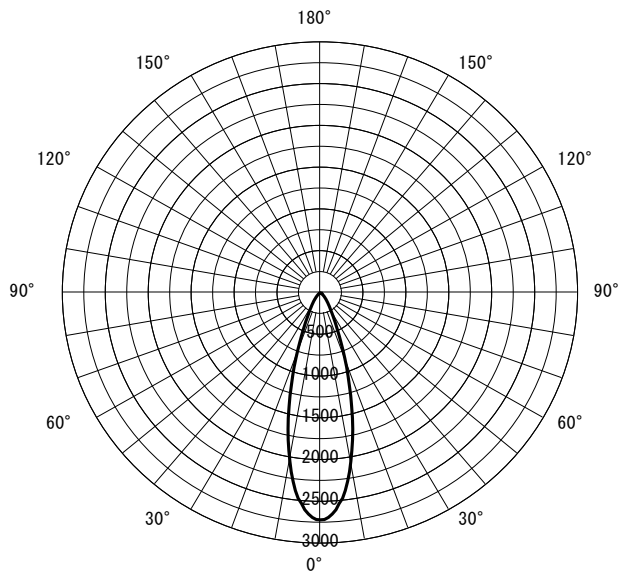

○直射水平面照度 (全光束: 2740 × 1 = 2740lm/台)

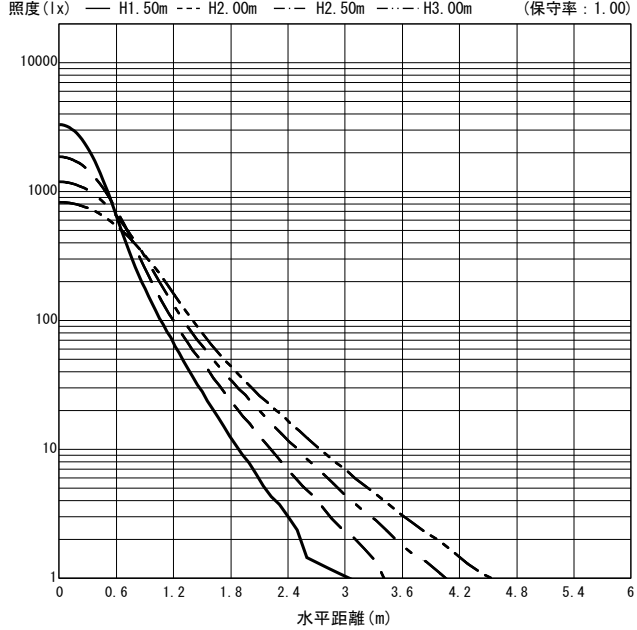

| 反射率 (%) |                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |  |  |  |  |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|--|--|--|
| 天井      | 80              |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     | 30  |     |     |     |     |     |     |     | 20  | 0  |  |  |  |  |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 10  | 0   |     |     |     |    |  |  |  |  |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 0  |  |  |  |  |
| 室指数     | 作業面照明率 (× 0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |  |  |  |  |
| 0.60    | 92              | 84  | 82  | 78  | 77  | 75  | 73  | 72  | 90  | 84  | 82  | 78  | 76  | 74  | 73  | 72  | 88  | 82  | 80  | 77  | 76  | 74  | 72  | 72  | 86  | 81  | 79  | 77  | 75  | 74  | 72  | 71  | 71  | 70 |  |  |  |  |
| 0.80    | 100             | 91  | 91  | 85  | 85  | 82  | 81  | 79  | 98  | 90  | 90  | 85  | 84  | 81  | 81  | 79  | 95  | 88  | 88  | 84  | 83  | 81  | 80  | 78  | 92  | 87  | 86  | 83  | 82  | 80  | 79  | 78  | 78  | 77 |  |  |  |  |
| 1.00    | 105             | 94  | 96  | 89  | 91  | 86  | 86  | 83  | 103 | 93  | 95  | 89  | 90  | 86  | 86  | 83  | 99  | 92  | 93  | 88  | 88  | 85  | 85  | 83  | 96  | 90  | 91  | 87  | 87  | 85  | 84  | 83  | 82  | 81 |  |  |  |  |
| 1.25    | 110             | 97  | 102 | 93  | 96  | 90  | 92  | 88  | 107 | 96  | 100 | 93  | 95  | 90  | 91  | 87  | 103 | 95  | 97  | 91  | 93  | 89  | 89  | 87  | 99  | 93  | 94  | 90  | 91  | 88  | 88  | 86  | 86  | 85 |  |  |  |  |
| 1.50    | 113             | 99  | 105 | 96  | 100 | 93  | 96  | 90  | 110 | 98  | 103 | 95  | 99  | 92  | 95  | 90  | 105 | 97  | 100 | 94  | 96  | 91  | 93  | 89  | 101 | 95  | 97  | 92  | 93  | 90  | 91  | 89  | 88  | 87 |  |  |  |  |
| 2.00    | 117             | 102 | 111 | 99  | 106 | 96  | 102 | 94  | 114 | 101 | 108 | 98  | 104 | 96  | 100 | 94  | 108 | 99  | 104 | 97  | 100 | 95  | 97  | 93  | 103 | 97  | 100 | 95  | 97  | 94  | 95  | 92  | 92  | 90 |  |  |  |  |
| 2.50    | 120             | 103 | 114 | 101 | 110 | 99  | 106 | 97  | 116 | 102 | 111 | 100 | 107 | 98  | 104 | 96  | 110 | 100 | 106 | 98  | 103 | 97  | 101 | 95  | 105 | 98  | 102 | 97  | 99  | 95  | 97  | 94  | 94  | 92 |  |  |  |  |
| 3.00    | 122             | 104 | 117 | 102 | 112 | 100 | 109 | 99  | 118 | 103 | 114 | 101 | 110 | 99  | 107 | 98  | 111 | 101 | 108 | 99  | 105 | 98  | 103 | 97  | 106 | 99  | 103 | 98  | 101 | 97  | 99  | 96  | 95  | 94 |  |  |  |  |
| 4.00    | 124             | 105 | 120 | 104 | 116 | 102 | 113 | 101 | 120 | 104 | 117 | 103 | 113 | 101 | 111 | 100 | 113 | 102 | 110 | 101 | 108 | 100 | 106 | 99  | 107 | 100 | 105 | 99  | 103 | 98  | 102 | 97  | 97  | 95 |  |  |  |  |
| 5.00    | 126             | 106 | 122 | 105 | 119 | 104 | 116 | 102 | 121 | 105 | 118 | 104 | 116 | 103 | 113 | 102 | 114 | 103 | 112 | 102 | 110 | 101 | 108 | 100 | 108 | 101 | 106 | 100 | 105 | 99  | 103 | 99  | 98  | 96 |  |  |  |  |
| 7.00    | 127             | 107 | 125 | 106 | 122 | 105 | 120 | 104 | 123 | 106 | 121 | 105 | 119 | 104 | 117 | 103 | 115 | 104 | 113 | 103 | 112 | 102 | 111 | 102 | 108 | 102 | 107 | 101 | 106 | 100 | 105 | 100 | 99  | 97 |  |  |  |  |
| 10.00   | 129             | 108 | 127 | 107 | 125 | 106 | 123 | 105 | 124 | 106 | 122 | 106 | 121 | 105 | 119 | 105 | 116 | 104 | 115 | 104 | 114 | 103 | 113 | 103 | 109 | 102 | 108 | 102 | 107 | 101 | 106 | 101 | 100 | 98 |  |  |  |  |

JIS C 8030:2014

三菱電機照明株式会社