



形名	EL-V0301N 1LN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.6 H					
器具効率		上方光束	下方光束	計			
		23.9%	76.1%	100.0%			
保守率		良い	0.680	普通	0.660	悪い	0.630

○配光曲線図 (cd/1000lm)

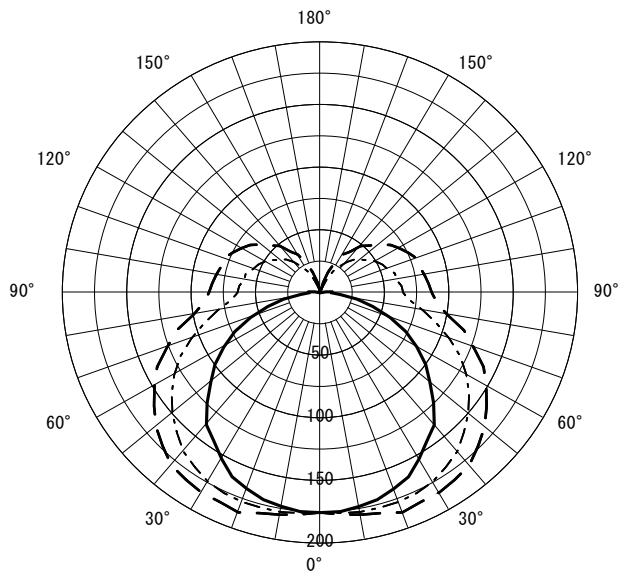

○直射水平面照度 (全光束 : 380 × 1 = 380lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

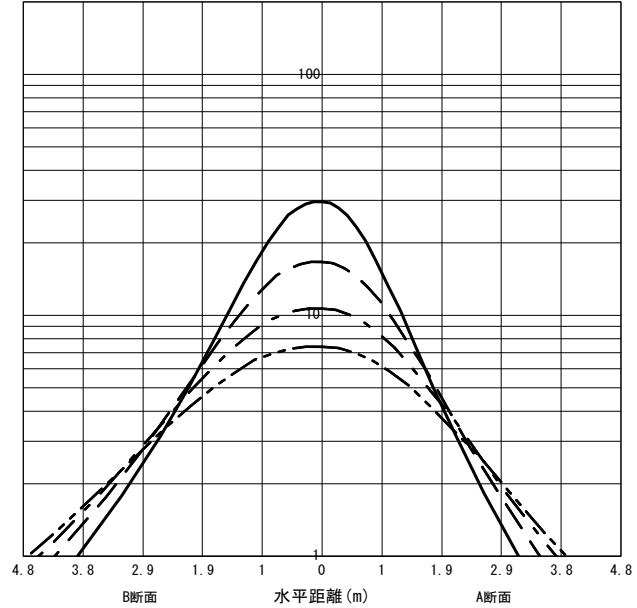

反射率 (%)																																		
天井	80								70								50								30								20	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	54	50	39	37	30	29	24	24	51	48	38	36	29	28	23	23	46	43	34	33	27	26	22	22	40	38	31	30	25	24	20	20	20	17
0.80	65	59	50	47	40	39	33	33	61	56	48	45	39	37	32	32	54	51	43	41	36	35	30	30	48	45	39	38	33	32	28	28	27	23
1.00	73	66	58	54	48	46	41	39	69	62	55	52	46	44	39	38	61	56	50	47	42	41	36	36	53	50	45	43	39	38	34	33	32	28
1.25	80	71	66	61	56	52	48	46	75	68	63	58	54	51	47	45	66	61	56	53	49	47	43	42	58	55	51	49	45	43	40	39	38	33
1.50	86	76	72	66	62	58	55	52	80	72	68	63	59	56	52	50	71	65	61	57	54	52	48	47	62	59	55	53	49	48	44	43	42	37
2.00	93	81	81	73	72	66	64	60	87	77	77	70	69	63	62	58	77	70	69	64	62	58	57	54	68	63	61	58	56	54	52	50	48	43
2.50	98	85	88	77	79	71	72	66	92	81	83	74	75	68	69	63	81	74	74	68	68	63	62	59	71	67	66	62	61	58	57	55	53	48
3.00	102	88	92	81	84	75	77	70	96	84	87	78	80	72	74	68	84	76	77	71	72	67	67	63	74	69	69	65	65	62	61	59	56	51
4.00	107	91	99	86	92	81	86	76	100	87	93	82	87	78	81	74	88	80	83	76	78	72	74	69	77	73	73	69	70	66	66	64	61	55
5.00	110	93	103	88	97	84	91	80	103	89	97	85	92	81	87	78	90	82	86	78	82	75	78	72	80	75	76	72	73	69	70	67	64	59
7.00	114	96	108	92	103	89	99	86	107	92	102	89	97	86	93	83	94	84	90	82	87	79	84	77	82	77	80	75	77	73	75	71	68	62
10.00	117	98	113	95	109	92	105	90	109	94	106	91	102	89	99	87	96	86	93	84	91	83	88	81	85	79	83	78	81	76	79	75	72	66

JIS C 8030:2014

三菱電機照明株式会社