



形名	EL-V0502L 1LN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	2.0 H					
	B-B'	1.9 H					
器具効率		上方光束	下方光束	計			
		44.0%	56.0%	100.0%			
保守率		良い	0.680	普通	0.660	悪い	0.630

○配光曲線図 (cd/1000lm)

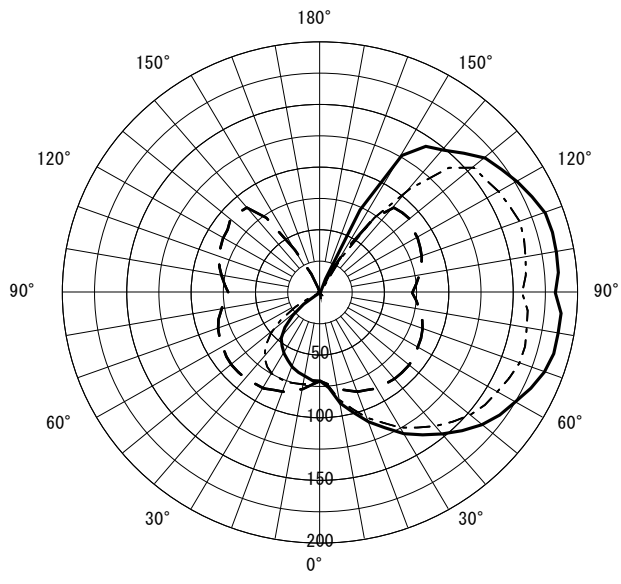

○直射水平面照度 (全光束 : 560 × 1 = 560lm/台)

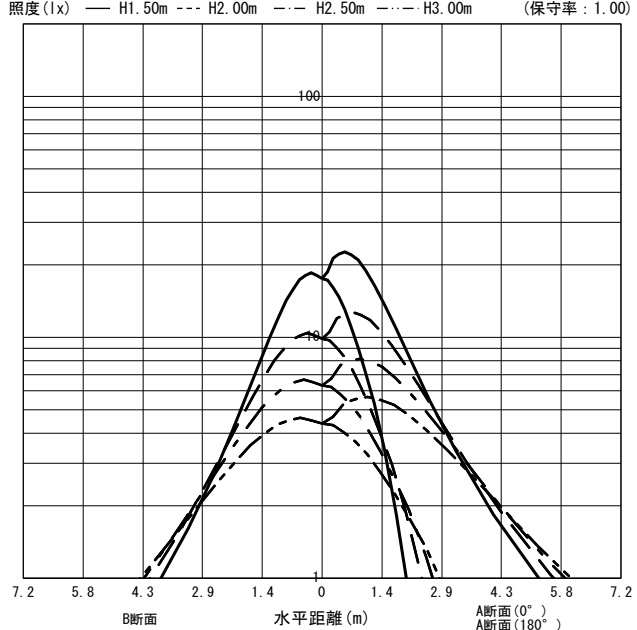

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	50	46	35	33	26	25	20	20	46	42	32	31	24	24	19	18	38	35	27	26	21	20	16	16	31	29	23	22	17	17	13	13	12	9
0.80	60	54	45	42	35	34	28	27	55	50	41	39	33	31	26	26	45	42	35	33	28	27	23	22	37	35	29	28	23	23	19	19	17	13
1.00	67	60	52	49	42	40	35	34	61	56	48	45	39	37	32	31	51	47	41	38	33	32	28	27	41	39	34	32	28	27	24	23	21	16
1.25	74	66	60	55	50	46	42	40	68	61	55	51	46	43	39	37	56	51	46	44	39	37	34	33	45	43	38	37	33	32	28	28	25	19
1.50	79	70	66	60	56	52	48	45	72	65	60	55	51	48	44	42	59	55	51	47	44	42	38	37	48	45	42	40	36	35	32	31	29	22
2.00	87	76	75	67	65	59	57	53	79	70	68	62	60	55	53	50	65	59	57	53	51	48	45	43	53	50	47	45	42	40	38	37	34	26
2.50	92	79	81	71	72	64	64	59	84	74	74	66	66	60	59	55	69	63	62	57	56	52	51	48	56	52	51	48	46	44	42	41	37	30
3.00	96	82	85	75	77	69	70	63	87	76	78	70	71	64	65	59	72	65	65	60	60	55	55	52	58	55	54	51	49	47	46	44	40	32
4.00	100	85	92	79	84	74	78	69	91	80	84	74	78	69	72	65	75	68	70	64	65	60	61	57	61	58	57	54	54	51	51	49	45	36
5.00	104	88	96	83	90	78	84	74	94	82	88	77	82	73	77	69	78	70	73	67	69	63	65	60	64	60	60	57	57	54	54	52	48	39
7.00	108	90	102	86	96	83	91	79	98	84	93	81	88	77	84	74	81	73	77	70	74	67	71	65	66	62	64	60	61	58	59	56	51	42
10.00	111	93	106	90	102	87	98	84	101	87	97	84	93	81	90	79	84	75	81	73	78	71	76	69	69	64	66	63	64	61	63	59	55	45

JIS C 8030:2014

三菱電機照明株式会社