


|        |            |    |  |      |
|--------|------------|----|--|------|
| 形名     | EL-VE1701C | 電源 |  | ○諸特性 |
| 出力     | 固定出力       | 温度 |  |      |
| モード    |            |    |  |      |
| オプション1 |            |    |  |      |
| オプション2 |            |    |  |      |
| オプション3 |            |    |  |      |
| オプション4 |            |    |  |      |
| オプション5 |            |    |  |      |




|                |      |                     |       |       |       |    |       |
|----------------|------|---------------------|-------|-------|-------|----|-------|
| 光源             |      | LDA4L-G-E17/40/S-PS |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                   |       |       |       |    |       |
|                | A-A' | 1.7 H               |       |       |       |    |       |
|                | B-B' | 1.7 H               |       |       |       |    |       |
| 器具効率           |      | 上方光束                | 下方光束  | 計     |       |    |       |
|                |      | 0.0%                | 41.0% | 41.0% |       |    |       |
| 保守率            |      | 良い                  | 0.660 | 普通    | 0.630 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

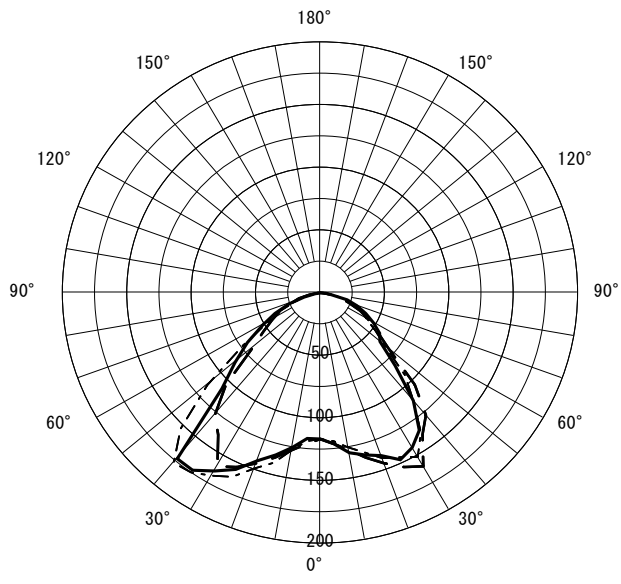

○直射水平面照度 (全光束 : 440 × 1 = 440lm/台)

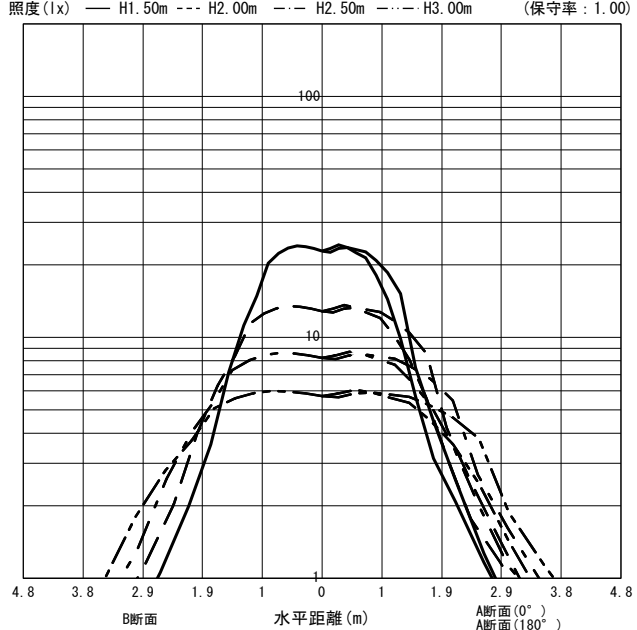

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井      | 80              |    |    |    | 70 |    |    |    | 50 |    |    |    | 30 |    |    |    | 20 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |    |    |    |    |    |    |    |    |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |    |    |
| 室指数     | 作業面照明率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| 0.60    | 27              | 25 | 21 | 20 | 17 | 17 | 15 | 15 | 26 | 24 | 20 | 20 | 17 | 17 | 15 | 15 | 25 | 23 | 20 | 19 | 17 | 16 | 15 | 14 | 23 | 22 | 19 | 19 | 17 | 16 | 15 | 14 | 14 | 14 |
| 0.80    | 32              | 29 | 26 | 25 | 23 | 22 | 20 | 19 | 31 | 28 | 26 | 24 | 22 | 22 | 20 | 19 | 29 | 27 | 25 | 24 | 22 | 21 | 20 | 19 | 28 | 26 | 24 | 23 | 21 | 21 | 19 | 19 | 19 | 18 |
| 1.00    | 35              | 32 | 30 | 28 | 26 | 25 | 24 | 23 | 34 | 31 | 29 | 28 | 26 | 25 | 24 | 23 | 33 | 30 | 28 | 27 | 25 | 25 | 23 | 23 | 31 | 29 | 27 | 26 | 25 | 24 | 23 | 23 | 22 | 22 |
| 1.25    | 39              | 34 | 34 | 31 | 30 | 28 | 27 | 26 | 37 | 34 | 33 | 30 | 30 | 28 | 27 | 26 | 35 | 32 | 32 | 30 | 29 | 28 | 27 | 26 | 33 | 31 | 30 | 29 | 28 | 27 | 26 | 26 | 25 | 25 |
| 1.50    | 41              | 36 | 36 | 33 | 33 | 30 | 30 | 28 | 39 | 35 | 35 | 32 | 32 | 30 | 30 | 28 | 37 | 34 | 34 | 32 | 31 | 30 | 29 | 28 | 35 | 33 | 32 | 31 | 30 | 29 | 28 | 28 | 28 | 27 |
| 2.00    | 44              | 38 | 40 | 35 | 37 | 33 | 34 | 32 | 42 | 37 | 39 | 35 | 36 | 33 | 34 | 31 | 40 | 36 | 37 | 34 | 34 | 33 | 33 | 31 | 37 | 35 | 35 | 33 | 33 | 32 | 32 | 31 | 31 | 30 |
| 2.50    | 46              | 39 | 42 | 37 | 39 | 35 | 37 | 34 | 44 | 39 | 41 | 37 | 38 | 35 | 36 | 34 | 41 | 38 | 39 | 36 | 37 | 34 | 35 | 33 | 39 | 37 | 37 | 35 | 35 | 34 | 34 | 33 | 33 | 32 |
| 3.00    | 47              | 40 | 44 | 38 | 41 | 37 | 39 | 35 | 45 | 40 | 43 | 38 | 40 | 36 | 38 | 35 | 42 | 39 | 40 | 37 | 38 | 36 | 37 | 35 | 40 | 37 | 38 | 36 | 37 | 35 | 35 | 34 | 34 | 33 |
| 4.00    | 49              | 41 | 46 | 40 | 44 | 39 | 42 | 37 | 47 | 41 | 45 | 39 | 43 | 38 | 41 | 37 | 44 | 40 | 42 | 39 | 41 | 37 | 39 | 37 | 41 | 39 | 40 | 38 | 39 | 37 | 38 | 36 | 36 | 35 |
| 5.00    | 50              | 42 | 47 | 41 | 46 | 40 | 44 | 39 | 48 | 41 | 46 | 40 | 44 | 39 | 43 | 38 | 45 | 40 | 43 | 39 | 42 | 39 | 41 | 38 | 42 | 39 | 41 | 39 | 40 | 38 | 39 | 37 | 37 | 36 |
| 7.00    | 51              | 43 | 49 | 42 | 48 | 41 | 46 | 40 | 49 | 42 | 48 | 41 | 46 | 41 | 45 | 40 | 46 | 41 | 45 | 40 | 44 | 40 | 43 | 39 | 43 | 40 | 42 | 40 | 41 | 39 | 41 | 39 | 38 | 37 |
| 10.00   | 52              | 43 | 51 | 43 | 49 | 42 | 48 | 41 | 50 | 43 | 49 | 42 | 48 | 42 | 47 | 41 | 46 | 42 | 46 | 41 | 45 | 41 | 44 | 40 | 43 | 41 | 43 | 40 | 42 | 40 | 42 | 40 | 39 | 38 |

JIS C 8030:2014

三菱電機照明株式会社