




形名	EL-VE1703C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				



○配光曲線図 (cd/1000lm)

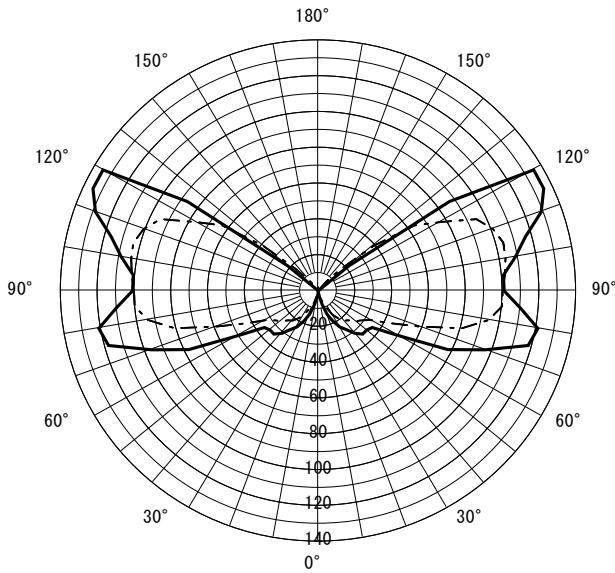

○直射水平面照度 (全光束: 440 × 1 = 440lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m ···· H3.00m (保守率: 1.00)

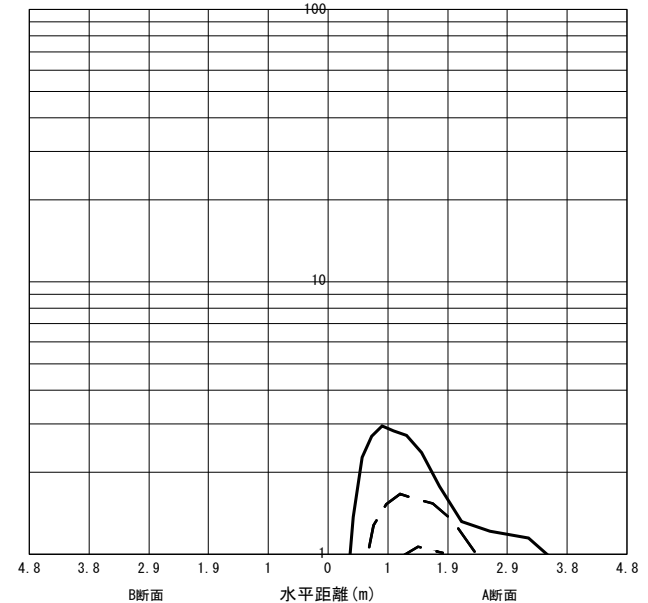

反射率 (%)																				
天井	80				70				50				30				20	0		
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数	作業面照明率 (× 0.01)																			
0.60	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0.80	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1.50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2.50	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
7.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

JIS C 8030:2014

三菱電機照明株式会社