



形名	EL-VE1704C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDA8L-G-E17/60/S					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		11.8%	71.1%	82.9%			
保守率		良い	0.660	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

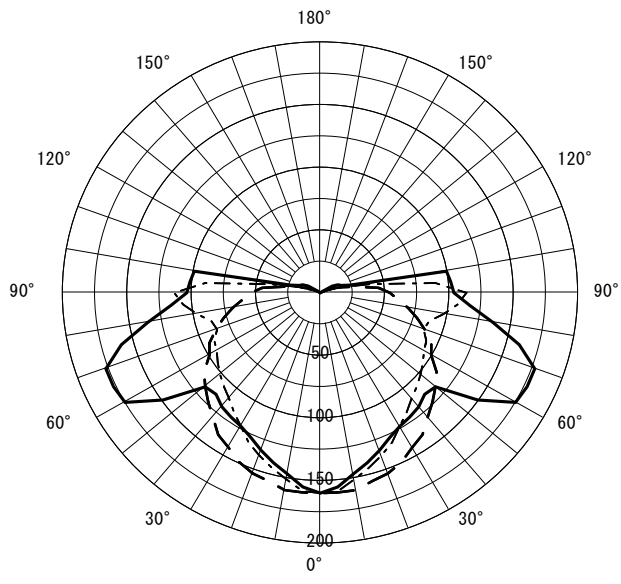

○直射水平面照度 (全光束: 760 × 1 = 760lm/台)

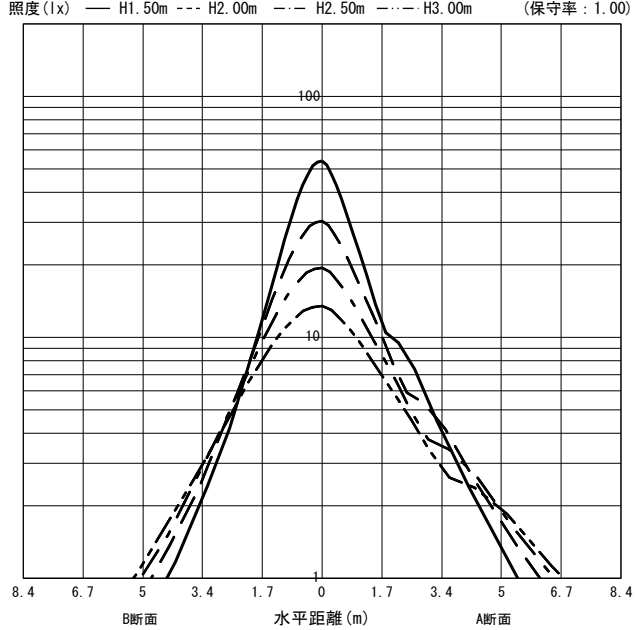

反射率 (%)																																						
天井	80								70								50								30								20	0				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	作業面照明率 (× 0.01)																																					
0.60	44	41	31	30	23	23	18	18	42	39	30	29	23	22	17	17	38	36	28	27	21	21	17	16	34	33	26	25	20	20	16	16	15	13				
0.80	53	48	39	37	31	29	25	24	50	46	38	36	30	29	24	23	45	42	35	33	28	27	23	22	40	38	32	31	26	25	22	21	21	18				
1.00	59	53	45	42	36	34	30	29	56	50	44	41	35	34	29	28	50	46	40	38	33	32	27	27	45	42	37	35	31	30	26	25	25	22				
1.25	65	58	52	47	43	40	36	34	61	55	49	46	41	39	35	33	55	50	45	43	38	37	33	32	49	46	41	40	35	34	31	30	29	26				
1.50	69	61	57	52	48	44	41	38	65	58	54	50	46	43	39	37	58	54	49	46	42	40	37	36	52	49	45	43	39	38	35	34	33	30				
2.00	76	66	64	57	56	51	49	45	71	63	61	55	53	49	47	44	64	58	56	52	49	46	44	42	57	53	51	48	45	44	41	40	39	35				
2.50	80	69	70	62	61	55	55	50	75	66	66	59	59	54	53	49	67	61	60	56	54	51	49	46	60	56	54	52	50	48	45	44	43	39				
3.00	83	71	74	65	66	59	59	54	79	69	70	63	63	57	57	52	70	64	63	58	58	54	53	50	63	59	57	55	53	51	49	47	46	42				
4.00	88	75	80	69	73	64	67	59	83	72	76	67	69	62	64	58	74	67	68	62	63	59	59	55	66	62	62	58	58	55	54	52	51	47				
5.00	91	77	84	72	77	67	72	63	85	74	79	69	74	65	69	62	76	69	71	65	67	62	63	58	68	64	65	61	61	58	58	55	54	50				
7.00	94	79	88	75	83	72	79	68	89	77	84	73	79	70	75	66	79	72	76	69	72	66	69	63	71	67	68	64	65	62	63	60	58	54				
10.00	97	81	93	78	89	75	85	73	92	79	88	76	84	73	81	71	82	74	79	71	76	69	74	67	74	69	71	67	69	65	67	64	62	58				

JIS C 8030:2014

三菱電機照明株式会社