



形名	EL-VE1709C	電源	
出力	固定出力	温度	
モード			
オプション1			
オプション2			
オプション3			
オプション4			
オプション5			



○諸特性

光源		LDA8L-G-E17/60/S			
最大 取付 間隔	高さ	H			
	A-A'	2.0 H			
	B-B'	2.3 H			
器具効率		上方光束	下方光束	計	
		18.9%	41.4%	60.3%	
保守率		良い 0.630	普通 0.590	悪い 0.560	


○配光曲線図 (cd/1000lm)

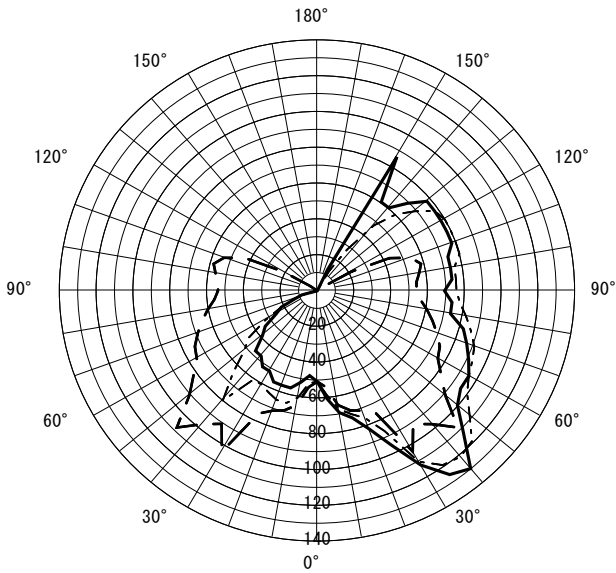

○直射水平面照度

(全光束 : 760 × 1 = 760lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - - H3.00m (保守率 : 1.00)

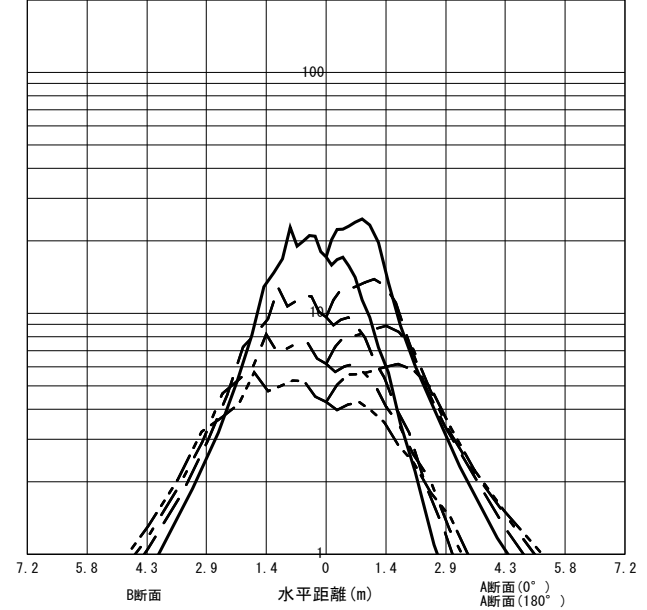

反射率 (%)																																				
天井	80								70				50				30				20	0														
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0														
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (×0.01)																																			
0.60	31	29	22	21	16	16	13	12	29	27	21	20	15	15	12	12	25	23	18	18	14	14	11	11	21	20	16	15	12	12	10	10	9	7		
0.80	38	34	28	27	22	21	18	18	35	32	27	25	21	20	17	17	30	28	24	23	19	19	16	15	26	25	21	20	17	17	14	14	13	11		
1.00	42	38	33	31	27	26	23	22	39	36	31	29	26	24	22	21	34	31	27	26	23	22	19	19	29	27	24	23	20	20	17	17	16	14		
1.25	47	42	38	35	32	30	27	26	43	39	36	33	30	28	26	25	37	34	31	30	27	26	23	23	32	30	27	26	24	23	21	21	19	16		
1.50	50	44	42	38	36	33	31	29	46	41	39	36	34	32	29	28	40	37	34	32	30	28	26	26	34	32	30	29	26	26	24	23	22	19		
2.00	55	48	47	42	42	38	37	34	51	45	44	40	39	36	35	33	43	40	39	36	35	33	31	30	37	35	34	32	30	29	28	27	26	22		
2.50	58	50	51	45	46	41	41	38	53	47	48	43	43	39	39	36	46	42	42	38	38	35	35	33	39	37	36	34	33	32	31	30	28	24		
3.00	60	51	54	47	49	44	45	40	56	49	50	45	46	42	42	39	48	43	44	40	40	38	37	35	41	38	38	36	35	34	33	32	30	26		
4.00	63	54	58	50	54	47	50	44	58	51	54	48	50	45	47	42	50	45	47	43	44	41	41	38	43	40	40	38	38	36	36	35	33	29		
5.00	65	55	60	52	57	49	53	47	60	52	56	49	53	47	50	45	52	47	49	44	46	43	44	41	44	42	42	40	40	38	39	37	35	31		
7.00	67	56	64	54	61	52	58	50	62	54	59	52	57	50	54	48	54	48	51	47	49	45	47	44	46	43	44	42	43	41	41	39	37	33		
10.00	69	58	66	56	64	54	62	53	64	55	62	53	60	52	58	50	55	50	53	48	52	47	50	46	47	44	46	43	45	42	44	42	39	35		

JIS C 8030:2014

三菱電機照明株式会社