


| | | | | |
|--------|------------|----|--|------|
| 形名 | EL-VE1709C | 電源 | | ○諸特性 |
| 出力 | 連調単色 | 温度 | | |
| モード | | | | |
| オプション1 | | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | |
|----------------|------|--------------------|-------|-------|
| 光源 | | LDA5N-G-E17/40/D/S | | |
| 最大 取付 間隔 | 高さ | H | | |
| | A-A' | 2.0 H | | |
| | B-B' | 2.3 H | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 |
| 保守率 | | 良い | 普通 | 悪い |
| | | 0.630 | 0.590 | 0.560 |

○配光曲線図 (cd/1000lm)

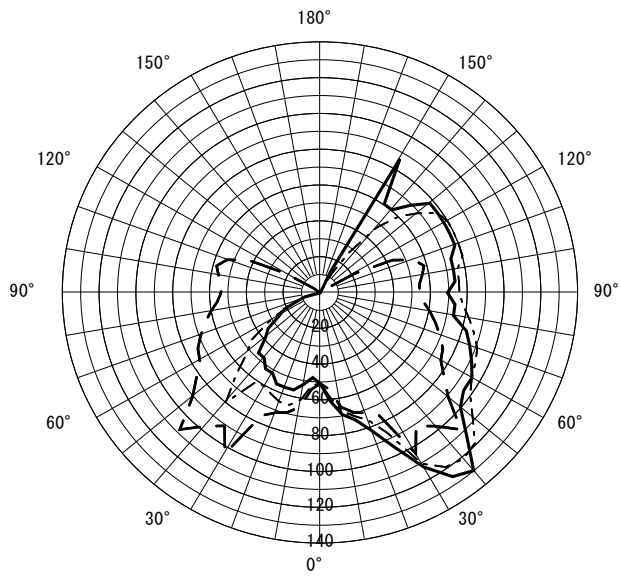

○直射水平面照度 (全光束 : 480 × 1 = 480lm/台)

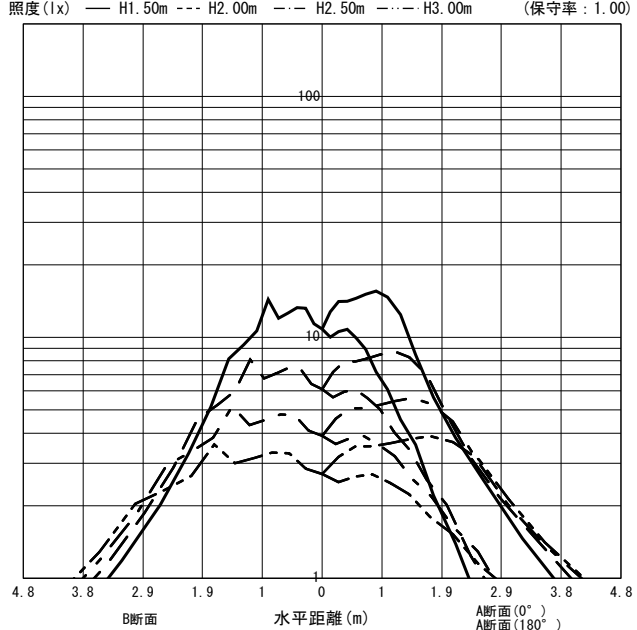

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | | | | | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 31 | 29 | 22 | 21 | 16 | 16 | 13 | 12 | 29 | 27 | 21 | 20 | 15 | 15 | 12 | 12 | 25 | 23 | 18 | 18 | 14 | 14 | 11 | 11 | 21 | 20 | 16 | 15 | 12 | 12 | 10 | 10 | 9 | 7 |
| 0.80 | 38 | 34 | 28 | 27 | 22 | 21 | 18 | 18 | 35 | 32 | 27 | 25 | 21 | 20 | 17 | 17 | 30 | 28 | 24 | 23 | 19 | 19 | 16 | 15 | 26 | 25 | 21 | 20 | 17 | 17 | 14 | 14 | 13 | 11 |
| 1.00 | 42 | 38 | 33 | 31 | 27 | 26 | 23 | 22 | 39 | 36 | 31 | 29 | 26 | 24 | 22 | 21 | 34 | 31 | 27 | 26 | 23 | 22 | 19 | 19 | 29 | 27 | 24 | 23 | 20 | 20 | 17 | 17 | 16 | 14 |
| 1.25 | 47 | 42 | 38 | 35 | 32 | 30 | 27 | 26 | 43 | 39 | 36 | 33 | 30 | 28 | 26 | 25 | 37 | 34 | 31 | 30 | 27 | 26 | 23 | 23 | 32 | 30 | 27 | 26 | 24 | 23 | 21 | 21 | 19 | 16 |
| 1.50 | 50 | 44 | 42 | 38 | 36 | 33 | 31 | 29 | 46 | 41 | 39 | 36 | 34 | 32 | 29 | 28 | 40 | 37 | 34 | 32 | 30 | 28 | 26 | 26 | 34 | 32 | 30 | 29 | 26 | 26 | 24 | 23 | 22 | 19 |
| 2.00 | 55 | 48 | 47 | 42 | 42 | 38 | 37 | 34 | 51 | 45 | 44 | 40 | 39 | 36 | 35 | 33 | 43 | 40 | 39 | 36 | 35 | 33 | 31 | 30 | 37 | 35 | 34 | 32 | 30 | 29 | 28 | 27 | 26 | 22 |
| 2.50 | 58 | 50 | 51 | 45 | 46 | 41 | 41 | 38 | 53 | 47 | 48 | 43 | 43 | 39 | 39 | 36 | 46 | 42 | 42 | 38 | 38 | 35 | 35 | 33 | 39 | 37 | 36 | 34 | 33 | 32 | 31 | 30 | 28 | 24 |
| 3.00 | 60 | 51 | 54 | 47 | 49 | 44 | 45 | 40 | 56 | 49 | 50 | 45 | 46 | 42 | 42 | 39 | 48 | 43 | 44 | 40 | 40 | 38 | 37 | 35 | 41 | 38 | 38 | 36 | 35 | 34 | 33 | 32 | 30 | 26 |
| 4.00 | 63 | 54 | 58 | 50 | 54 | 47 | 50 | 44 | 58 | 51 | 54 | 48 | 50 | 45 | 47 | 42 | 50 | 45 | 47 | 43 | 44 | 41 | 41 | 38 | 43 | 40 | 40 | 38 | 38 | 36 | 36 | 35 | 33 | 29 |
| 5.00 | 65 | 55 | 60 | 52 | 57 | 49 | 53 | 47 | 60 | 52 | 56 | 49 | 53 | 47 | 50 | 45 | 52 | 47 | 49 | 44 | 46 | 43 | 44 | 41 | 44 | 42 | 42 | 40 | 40 | 38 | 39 | 37 | 35 | 31 |
| 7.00 | 67 | 56 | 64 | 54 | 61 | 52 | 58 | 50 | 62 | 54 | 59 | 52 | 57 | 50 | 54 | 48 | 54 | 48 | 51 | 47 | 49 | 45 | 47 | 44 | 46 | 43 | 44 | 42 | 43 | 41 | 41 | 39 | 37 | 33 |
| 10.00 | 69 | 58 | 66 | 56 | 64 | 54 | 62 | 53 | 64 | 55 | 62 | 53 | 60 | 52 | 58 | 50 | 55 | 50 | 53 | 48 | 52 | 47 | 50 | 46 | 47 | 44 | 46 | 43 | 45 | 42 | 44 | 42 | 39 | 35 |

JIS C 8030:2014

三菱電機照明株式会社