


|        |            |    |  |      |
|--------|------------|----|--|------|
| 形名     | EL-VE1714C | 電源 |  | ○諸特性 |
| 出力     | 固定出力       | 温度 |  |      |
| モード    |            |    |  |      |
| オプション1 |            |    |  |      |
| オプション2 |            |    |  |      |
| オプション3 |            |    |  |      |
| オプション4 |            |    |  |      |
| オプション5 |            |    |  |      |




|                |      |                  |       |       |       |    |       |
|----------------|------|------------------|-------|-------|-------|----|-------|
| 光源             |      | LDA5N-G-E17/40/S |       |       |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H                |       |       |       |    |       |
|                | A-A' | 1.9 H            |       |       |       |    |       |
|                | B-B' | 1.3 H            |       |       |       |    |       |
| 器具効率           |      | 上方光束             | 下方光束  | 計     |       |    |       |
|                |      | 38.5%            | 52.2% | 90.7% |       |    |       |
| 保守率            |      | 良い               | 0.660 | 普通    | 0.630 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

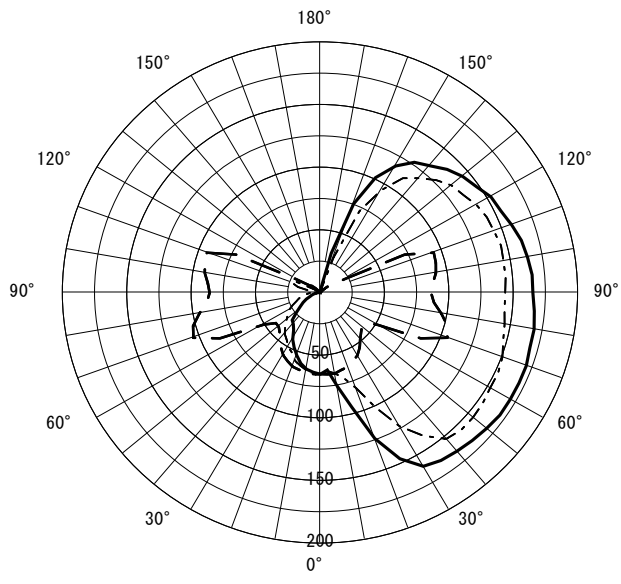

○直射水平面照度 (全光束 : 560 × 1 = 560lm/台)

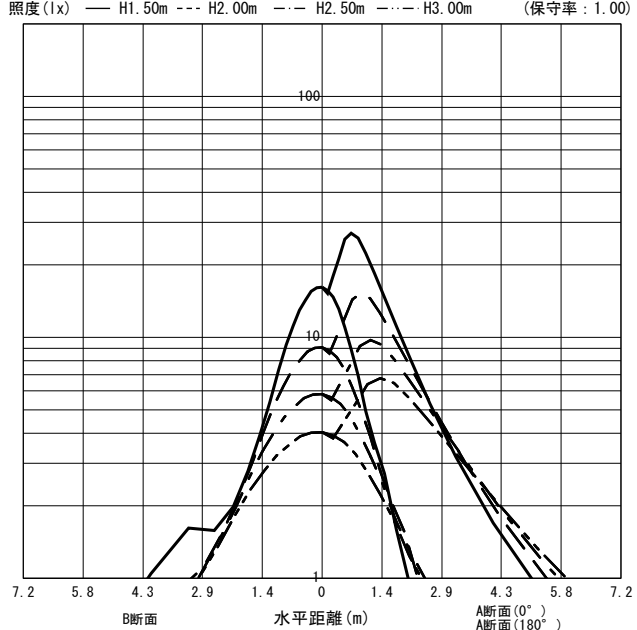

| 反射率 (%) |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 天井      | 80              |    |    |    |    |    |    |    | 70 |    |    |    |    |    |    |    | 50 |    |    |    |    |    |    |    | 30 |    |    |    |    |    |    |    | 20 | 0  |  |  |  |  |  |
| 壁       | 70              | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0  |    |    |    |    |  |  |  |  |  |
| 床       | 30              | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0  |  |  |  |  |  |
| 室指数     | 作業面照明率 (× 0.01) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| 0.60    | 45              | 41 | 31 | 30 | 23 | 22 | 17 | 17 | 41 | 38 | 29 | 27 | 21 | 21 | 16 | 16 | 34 | 32 | 24 | 23 | 18 | 18 | 14 | 14 | 28 | 26 | 20 | 20 | 15 | 15 | 12 | 12 | 10 | 7  |  |  |  |  |  |
| 0.80    | 54              | 49 | 40 | 37 | 31 | 30 | 24 | 24 | 49 | 45 | 37 | 35 | 29 | 28 | 23 | 22 | 41 | 38 | 31 | 30 | 24 | 24 | 20 | 19 | 33 | 31 | 26 | 25 | 21 | 20 | 17 | 16 | 15 | 11 |  |  |  |  |  |
| 1.00    | 60              | 54 | 46 | 43 | 37 | 35 | 30 | 29 | 55 | 50 | 43 | 40 | 34 | 33 | 28 | 27 | 45 | 42 | 36 | 34 | 29 | 28 | 24 | 24 | 37 | 35 | 30 | 29 | 24 | 24 | 20 | 20 | 18 | 14 |  |  |  |  |  |
| 1.25    | 67              | 59 | 53 | 49 | 44 | 41 | 37 | 35 | 61 | 55 | 49 | 45 | 40 | 38 | 34 | 33 | 50 | 46 | 41 | 39 | 34 | 33 | 29 | 28 | 41 | 38 | 34 | 32 | 29 | 28 | 25 | 24 | 22 | 17 |  |  |  |  |  |
| 1.50    | 71              | 63 | 59 | 53 | 49 | 46 | 42 | 40 | 65 | 58 | 54 | 49 | 45 | 43 | 39 | 37 | 53 | 49 | 45 | 42 | 39 | 37 | 33 | 32 | 43 | 41 | 37 | 36 | 32 | 31 | 28 | 27 | 25 | 19 |  |  |  |  |  |
| 2.00    | 78              | 68 | 67 | 59 | 58 | 53 | 50 | 47 | 71 | 63 | 61 | 55 | 53 | 49 | 47 | 44 | 59 | 54 | 51 | 48 | 45 | 42 | 40 | 38 | 48 | 45 | 42 | 40 | 37 | 36 | 33 | 33 | 30 | 23 |  |  |  |  |  |
| 2.50    | 83              | 71 | 72 | 64 | 64 | 57 | 57 | 52 | 75 | 66 | 66 | 60 | 59 | 54 | 53 | 49 | 62 | 57 | 55 | 51 | 50 | 47 | 45 | 42 | 51 | 48 | 46 | 43 | 41 | 40 | 38 | 36 | 33 | 26 |  |  |  |  |  |
| 3.00    | 86              | 74 | 77 | 67 | 69 | 61 | 62 | 56 | 79 | 69 | 70 | 63 | 63 | 57 | 57 | 53 | 65 | 59 | 59 | 54 | 53 | 50 | 49 | 46 | 53 | 50 | 48 | 46 | 44 | 42 | 41 | 39 | 36 | 29 |  |  |  |  |  |
| 4.00    | 91              | 77 | 83 | 72 | 76 | 66 | 70 | 62 | 83 | 72 | 76 | 67 | 70 | 62 | 64 | 58 | 68 | 62 | 63 | 58 | 59 | 54 | 55 | 51 | 56 | 52 | 52 | 49 | 49 | 46 | 46 | 44 | 40 | 33 |  |  |  |  |  |
| 5.00    | 94              | 79 | 87 | 74 | 81 | 70 | 75 | 66 | 85 | 74 | 79 | 70 | 74 | 66 | 69 | 62 | 71 | 64 | 66 | 60 | 62 | 57 | 59 | 54 | 58 | 54 | 55 | 52 | 52 | 49 | 49 | 47 | 43 | 35 |  |  |  |  |  |
| 7.00    | 97              | 82 | 92 | 78 | 87 | 74 | 82 | 71 | 89 | 77 | 84 | 73 | 80 | 70 | 76 | 67 | 74 | 66 | 70 | 64 | 67 | 61 | 64 | 59 | 61 | 57 | 58 | 55 | 55 | 53 | 53 | 51 | 47 | 38 |  |  |  |  |  |
| 10.00   | 100             | 84 | 96 | 81 | 92 | 78 | 88 | 76 | 92 | 79 | 88 | 76 | 85 | 74 | 81 | 71 | 76 | 69 | 73 | 66 | 71 | 64 | 68 | 62 | 63 | 59 | 61 | 57 | 59 | 56 | 57 | 54 | 50 | 41 |  |  |  |  |  |

JIS C 8030:2014

三菱電機照明株式会社