


形名	EL-VE1714C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDA4L-G-E17/40/S-PS					
最大 取付 間隔	高さ	H					
	A-A'	1.9 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		38.5%	52.2%	90.7%			
保守率		良い	0.660	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

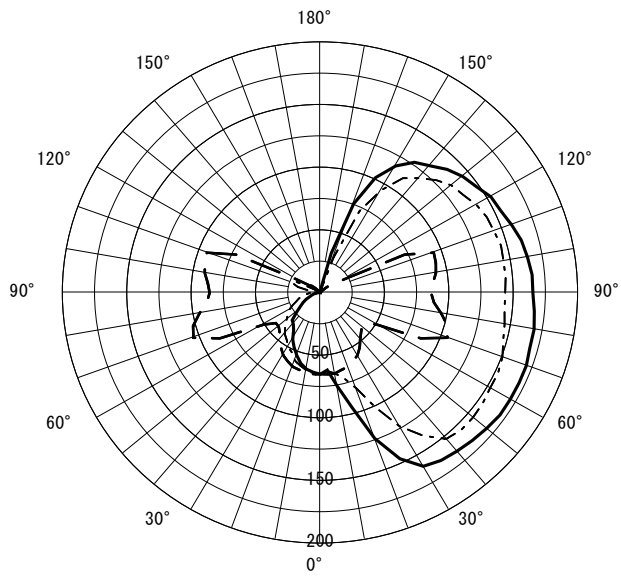

○直射水平面照度 (全光束 : 440 × 1 = 440lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

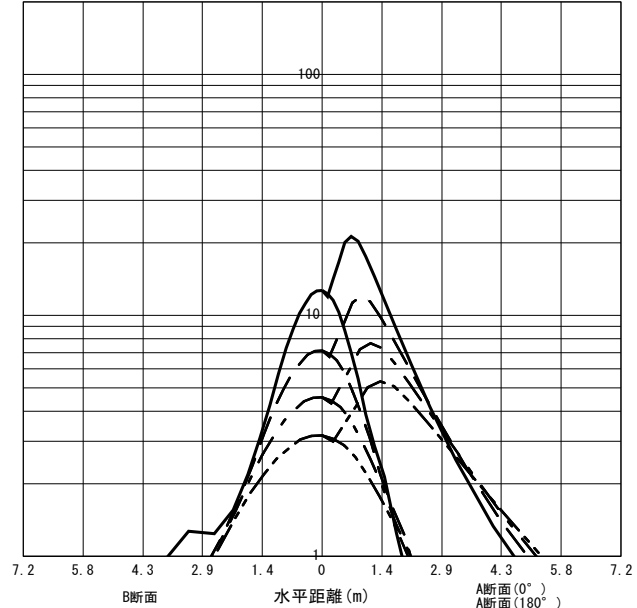

反射率 (%)																																							
天井	80								70								50								30								20	0					
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0									
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	作業面照明率 (× 0.01)																																						
0.60	45	41	31	30	23	22	17	17	41	38	29	27	21	21	16	16	34	32	24	23	18	18	14	14	28	26	20	20	15	15	12	12	10	7					
0.80	54	49	40	37	31	30	24	24	49	45	37	35	29	28	23	22	41	38	31	30	24	24	20	19	33	31	26	25	21	20	17	16	15	11					
1.00	60	54	46	43	37	35	30	29	55	50	43	40	34	33	28	27	45	42	36	34	29	28	24	24	37	35	30	29	24	24	20	20	18	14					
1.25	67	59	53	49	44	41	37	35	61	55	49	45	40	38	34	33	50	46	41	39	34	33	29	28	41	38	34	32	29	28	25	24	22	17					
1.50	71	63	59	53	49	46	42	40	65	58	54	49	45	43	39	37	53	49	45	42	39	37	33	32	43	41	37	36	32	31	28	27	25	19					
2.00	78	68	67	59	58	53	50	47	71	63	61	55	53	49	47	44	59	54	51	48	45	42	40	38	48	45	42	40	37	36	33	33	30	23					
2.50	83	71	72	64	64	57	57	52	75	66	66	60	59	54	53	49	62	57	55	51	50	47	45	42	51	48	46	43	41	40	38	36	33	26					
3.00	86	74	77	67	69	61	62	56	79	69	70	63	63	57	57	53	65	59	59	54	53	50	49	46	53	50	48	46	44	42	41	39	36	29					
4.00	91	77	83	72	76	66	70	62	83	72	76	67	70	62	64	58	68	62	63	58	59	54	55	51	56	52	52	49	49	46	46	44	40	33					
5.00	94	79	87	74	81	70	75	66	85	74	79	70	74	66	69	62	71	64	66	60	62	57	59	54	58	54	55	52	52	49	49	47	43	35					
7.00	97	82	92	78	87	74	82	71	89	77	84	73	80	70	76	67	74	66	70	64	67	61	64	59	61	57	58	55	55	53	53	51	47	38					
10.00	100	84	96	81	92	78	88	76	92	79	88	76	85	74	81	71	76	69	73	66	71	64	68	62	63	59	61	57	59	56	57	54	50	41					

JIS C 8030:2014

三菱電機照明株式会社