


| | | | | |
|--------|------------|----|--|------|
| 形名 | EL-VE1714C | 電源 | | ○諸特性 |
| 出力 | 固定出力 | 温度 | | |
| モード | | | | |
| オプション1 | | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|---------------------|-------|-------|-------|----|-------|
| 光源 | | LDA4N-G-E17/40/S-PS | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.9 H | | | | | |
| | B-B' | 1.3 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 38.5% | 52.2% | 90.7% | | | |
| 保守率 | | 良い | 0.660 | 普通 | 0.630 | 悪い | 0.560 |

○配光曲線図 (cd/1000lm)

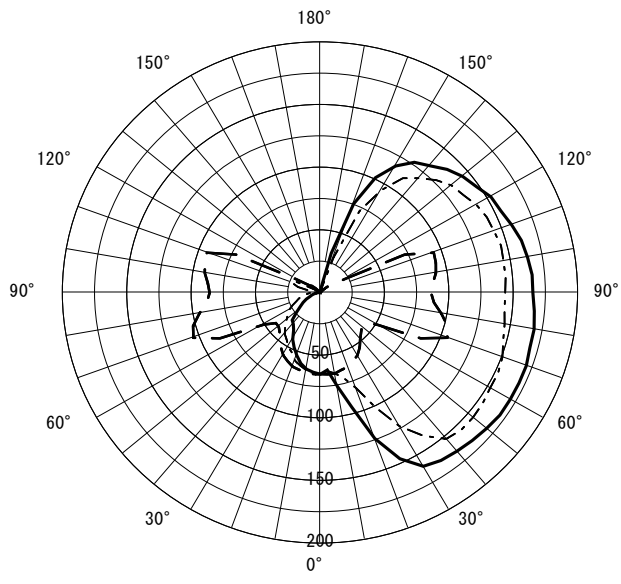

○直射水平面照度 (全光束: 480 × 1 = 480lm/台)

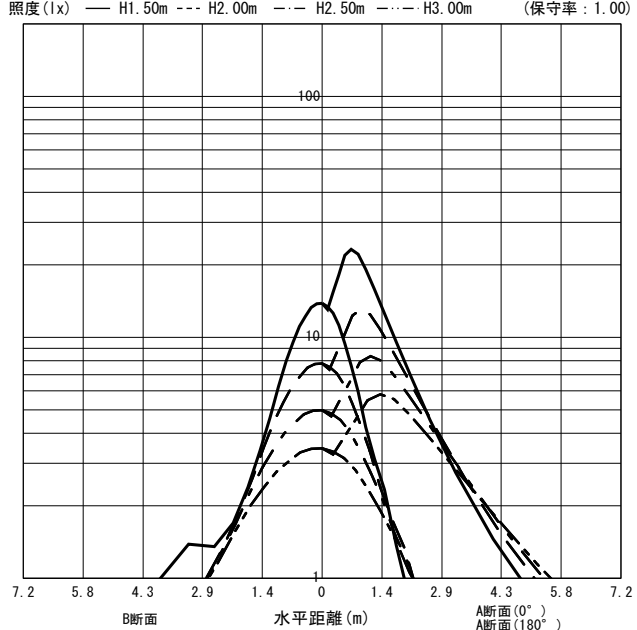

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|
| 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | | | | | 30 | | | | | | | | 20 | 0 | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 45 | 41 | 31 | 30 | 23 | 22 | 17 | 17 | 41 | 38 | 29 | 27 | 21 | 21 | 16 | 16 | 34 | 32 | 24 | 23 | 18 | 18 | 14 | 14 | 28 | 26 | 20 | 20 | 15 | 15 | 12 | 12 | 10 | 7 | | | | |
| 0.80 | 54 | 49 | 40 | 37 | 31 | 30 | 24 | 24 | 49 | 45 | 37 | 35 | 29 | 28 | 23 | 22 | 41 | 38 | 31 | 30 | 24 | 24 | 20 | 19 | 33 | 31 | 26 | 25 | 21 | 20 | 17 | 16 | 15 | 11 | | | | |
| 1.00 | 60 | 54 | 46 | 43 | 37 | 35 | 30 | 29 | 55 | 50 | 43 | 40 | 34 | 33 | 28 | 27 | 45 | 42 | 36 | 34 | 29 | 28 | 24 | 24 | 37 | 35 | 30 | 29 | 24 | 24 | 20 | 20 | 18 | 14 | | | | |
| 1.25 | 67 | 59 | 53 | 49 | 44 | 41 | 37 | 35 | 61 | 55 | 49 | 45 | 40 | 38 | 34 | 33 | 50 | 46 | 41 | 39 | 34 | 33 | 29 | 28 | 41 | 38 | 34 | 32 | 29 | 28 | 25 | 24 | 22 | 17 | | | | |
| 1.50 | 71 | 63 | 59 | 53 | 49 | 46 | 42 | 40 | 65 | 58 | 54 | 49 | 45 | 43 | 39 | 37 | 53 | 49 | 45 | 42 | 39 | 37 | 33 | 32 | 43 | 41 | 37 | 36 | 32 | 31 | 28 | 27 | 25 | 19 | | | | |
| 2.00 | 78 | 68 | 67 | 59 | 58 | 53 | 50 | 47 | 71 | 63 | 61 | 55 | 53 | 49 | 47 | 44 | 59 | 54 | 51 | 48 | 45 | 42 | 40 | 38 | 48 | 45 | 42 | 40 | 37 | 36 | 33 | 33 | 30 | 23 | | | | |
| 2.50 | 83 | 71 | 72 | 64 | 64 | 57 | 57 | 52 | 75 | 66 | 66 | 60 | 59 | 54 | 53 | 49 | 62 | 57 | 55 | 51 | 50 | 47 | 45 | 42 | 51 | 48 | 46 | 43 | 41 | 40 | 38 | 36 | 33 | 26 | | | | |
| 3.00 | 86 | 74 | 77 | 67 | 69 | 61 | 62 | 56 | 79 | 69 | 70 | 63 | 63 | 57 | 57 | 53 | 65 | 59 | 59 | 54 | 53 | 50 | 49 | 46 | 53 | 50 | 48 | 46 | 44 | 42 | 41 | 39 | 36 | 29 | | | | |
| 4.00 | 91 | 77 | 83 | 72 | 76 | 66 | 70 | 62 | 83 | 72 | 76 | 67 | 70 | 62 | 64 | 58 | 68 | 62 | 63 | 58 | 59 | 54 | 55 | 51 | 56 | 52 | 52 | 49 | 49 | 46 | 46 | 44 | 40 | 33 | | | | |
| 5.00 | 94 | 79 | 87 | 74 | 81 | 70 | 75 | 66 | 85 | 74 | 79 | 70 | 74 | 66 | 69 | 62 | 71 | 64 | 66 | 60 | 62 | 57 | 59 | 54 | 58 | 54 | 55 | 52 | 52 | 49 | 49 | 47 | 43 | 35 | | | | |
| 7.00 | 97 | 82 | 92 | 78 | 87 | 74 | 82 | 71 | 89 | 77 | 84 | 73 | 80 | 70 | 76 | 67 | 74 | 66 | 70 | 64 | 67 | 61 | 64 | 59 | 61 | 57 | 58 | 55 | 55 | 53 | 53 | 51 | 47 | 38 | | | | |
| 10.00 | 100 | 84 | 96 | 81 | 92 | 78 | 88 | 76 | 92 | 79 | 88 | 76 | 85 | 74 | 81 | 71 | 76 | 69 | 73 | 66 | 71 | 64 | 68 | 62 | 63 | 59 | 61 | 57 | 59 | 56 | 57 | 54 | 50 | 41 | | | | |

JIS C 8030:2014

三菱電機照明株式会社