


形名	EL-VE1715C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDA4L-G-E17/40/S-PS					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.5 H					
器具効率		上方光束	下方光束	計			
		42.9%	43.2%	86.1%			
保守率		良い	0.660	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

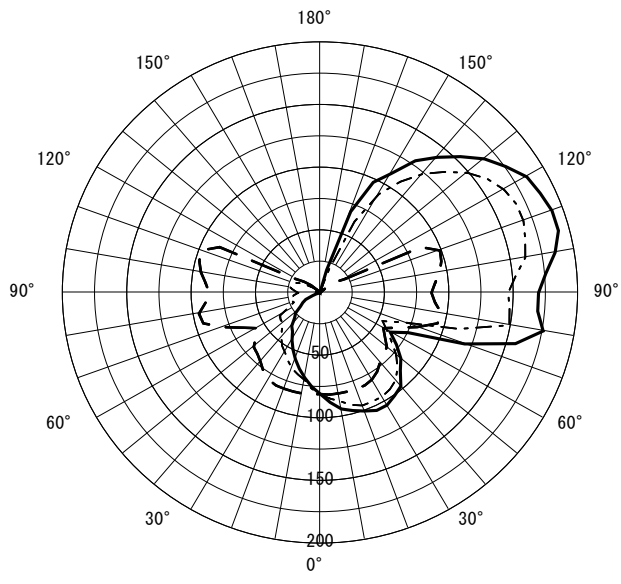

○直射水平面照度 (全光束: 440 × 1 = 440lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

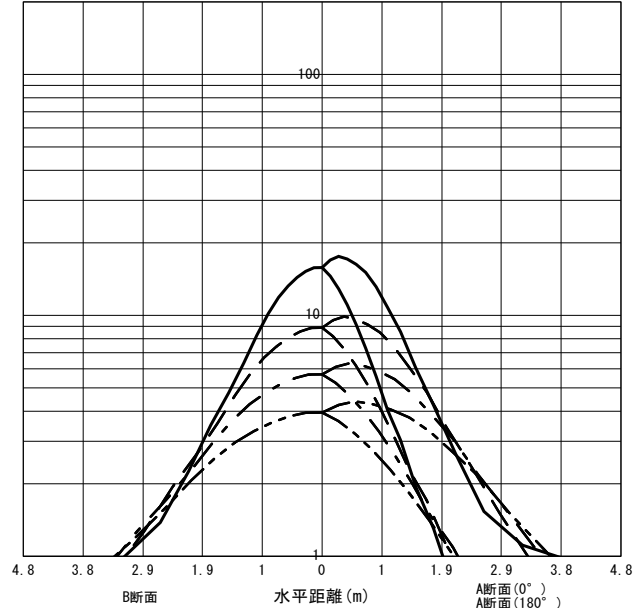

反射率 (%)																																				
天井	80								70								50								30								20	0		
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																			
0.60	43	40	31	29	23	23	18	18	39	37	28	27	22	21	17	17	32	30	24	23	18	18	14	14	26	25	19	19	15	15	12	12	11	7		
0.80	52	47	39	36	31	29	25	24	47	43	36	34	28	27	23	23	38	35	30	28	24	23	20	19	30	29	24	23	20	19	16	16	14	10		
1.00	58	52	45	42	36	35	30	29	52	47	41	38	34	32	28	27	42	39	34	32	28	27	24	23	34	32	27	26	23	22	19	19	17	12		
1.25	63	56	51	47	42	40	36	34	57	51	47	43	39	37	33	32	46	43	38	36	32	31	28	27	36	34	31	29	26	25	23	22	20	14		
1.50	67	59	56	50	47	44	40	38	61	54	51	47	43	40	37	35	49	45	42	39	36	34	31	30	39	36	33	32	29	28	25	25	22	16		
2.00	73	64	63	56	54	50	48	44	66	59	57	52	50	46	44	41	53	49	47	43	41	39	37	35	42	40	37	35	33	32	30	29	26	19		
2.50	78	67	68	60	60	54	53	49	70	61	62	55	55	50	49	45	56	51	50	46	45	42	41	38	44	42	40	38	36	35	33	32	29	21		
3.00	81	69	72	63	64	57	58	53	73	64	65	58	59	53	53	49	59	53	53	49	48	45	44	41	46	43	42	40	39	37	36	34	31	23		
4.00	85	72	77	67	71	62	65	58	76	66	70	62	64	57	59	54	62	56	57	52	53	49	49	46	49	46	45	43	42	40	39	38	34	26		
5.00	87	74	81	69	75	65	70	61	79	68	73	64	68	60	64	57	64	58	60	54	56	51	52	49	51	47	48	45	45	43	42	40	36	28		
7.00	91	76	86	73	81	69	76	66	82	71	78	67	73	64	70	62	66	60	63	57	60	55	57	53	53	50	50	48	48	46	46	44	40	31		
10.00	94	78	89	75	86	73	82	70	85	73	81	70	78	68	75	65	69	62	66	60	64	58	61	56	55	51	53	50	51	48	49	47	42	33		

JIS C 8030:2014

三菱電機照明株式会社