



形名	EL-VE1718C	電源		○諸特性																																										
出力	固定出力	温度																																												
モード																																														
オプション1																																														
オプション2																																														
オプション3																																														
オプション4																																														
オプション5																																														
				<table border="1"> <tr> <td colspan="2">光源</td> <td colspan="4">LDA8N-G-E17/60/S</td> </tr> <tr> <td rowspan="3">最大 取付 間隔</td> <td>高さ</td> <td colspan="4">H</td> </tr> <tr> <td>A-A'</td> <td colspan="4">1.2 H</td> </tr> <tr> <td>B-B'</td> <td colspan="4">1.5 H</td> </tr> <tr> <td colspan="2">器具効率</td> <td>上方光束</td> <td>下方光束</td> <td colspan="2">計</td> </tr> <tr> <td colspan="2"></td> <td>28.1%</td> <td>56.2%</td> <td colspan="2">84.4%</td> </tr> <tr> <td colspan="2">保守率</td> <td>良い</td> <td>0.660</td> <td>普通</td> <td>0.630</td> <td>悪い</td> <td>0.560</td> </tr> </table>	光源		LDA8N-G-E17/60/S				最大 取付 間隔	高さ	H				A-A'	1.2 H				B-B'	1.5 H				器具効率		上方光束	下方光束	計				28.1%	56.2%	84.4%		保守率		良い	0.660	普通	0.630	悪い	0.560
光源		LDA8N-G-E17/60/S																																												
最大 取付 間隔	高さ	H																																												
	A-A'	1.2 H																																												
	B-B'	1.5 H																																												
器具効率		上方光束	下方光束	計																																										
		28.1%	56.2%	84.4%																																										
保守率		良い	0.660	普通	0.630	悪い	0.560																																							




○配光曲線図 (cd/1000lm)

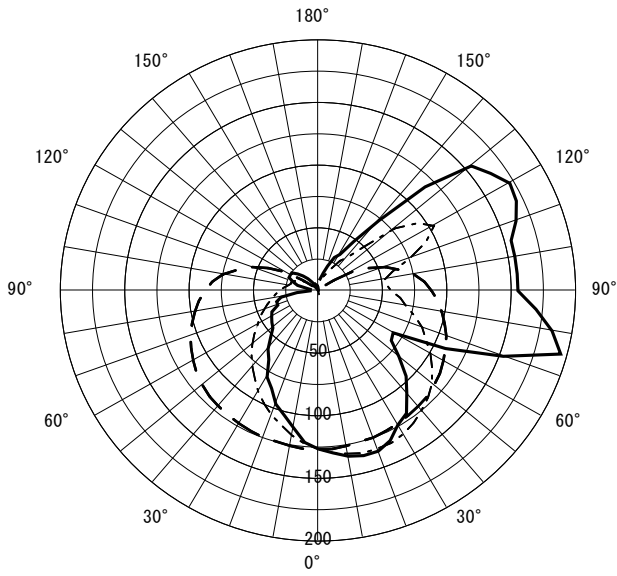

○直射水平面照度

(全光束 : 920 × 1 = 920lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - - H3.00m (保守率 : 1.00)

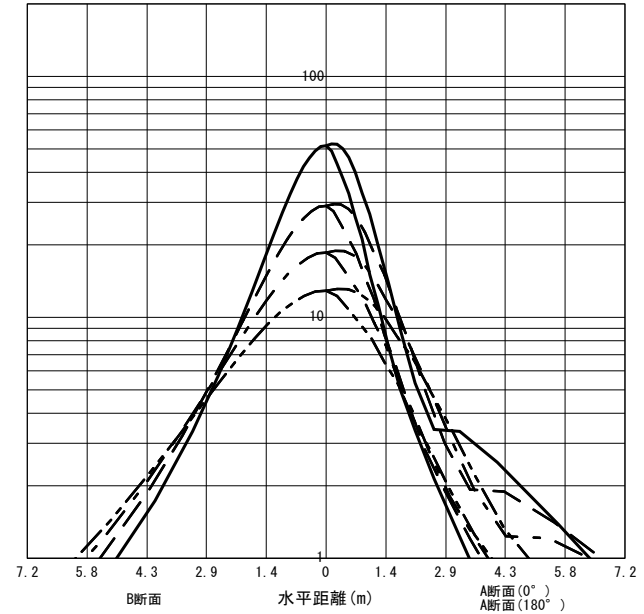

反射率 (%)																																		
天井	80								70				50				30				20	0												
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照明率 (× 0.01)																																	
0.60	44	41	32	30	24	24	19	19	41	38	30	29	23	22	18	18	36	33	27	26	21	20	17	16	31	29	23	23	18	18	15	15	14	11
0.80	53	48	40	38	32	31	26	25	49	45	38	36	30	29	25	24	42	39	33	32	27	26	22	22	36	34	29	28	24	23	20	20	19	15
1.00	59	53	46	43	38	36	32	31	55	50	44	41	36	34	30	29	47	43	38	36	32	31	27	26	40	38	33	32	28	27	24	24	22	19
1.25	65	58	53	48	44	41	38	36	60	54	49	46	42	39	36	34	51	47	43	41	37	35	32	31	44	41	37	36	32	31	28	28	26	22
1.50	69	61	58	52	49	46	42	40	64	57	54	49	46	43	40	38	55	50	47	44	41	39	36	35	46	44	40	39	36	34	32	31	29	25
2.00	76	66	65	58	57	52	50	47	70	62	61	55	53	49	48	45	59	54	53	49	47	44	42	40	50	47	45	43	41	39	37	36	34	29
2.50	80	69	70	62	63	56	56	51	74	65	65	59	59	54	53	49	63	57	57	52	51	48	47	44	53	50	49	46	44	43	41	40	37	32
3.00	83	71	74	65	67	60	61	55	77	67	69	62	63	57	57	53	65	59	60	55	55	51	51	48	55	52	51	48	47	45	44	43	40	34
4.00	87	74	80	69	74	65	68	61	80	70	74	65	69	61	64	58	69	62	64	58	60	55	56	52	58	55	55	52	52	49	49	47	44	38
5.00	90	76	83	72	78	68	73	64	83	72	78	68	73	64	68	61	71	64	67	61	63	58	60	55	60	56	57	54	54	52	52	49	47	40
7.00	93	78	88	75	84	72	79	69	86	74	82	71	78	68	74	66	73	66	70	64	67	61	64	59	63	59	60	57	58	55	56	53	50	44
10.00	96	80	92	78	88	75	85	73	89	76	85	74	82	71	79	69	76	68	73	66	71	64	69	63	65	61	63	59	61	58	59	56	53	47

JIS C 8030:2014

三菱電機照明株式会社