


形名	EL-WC1001L/W AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		7.7%	92.3%	100.0%			
保守率		良い	0.690	普通	0.670	悪い	0.630

○配光曲線図 (cd/1000lm)

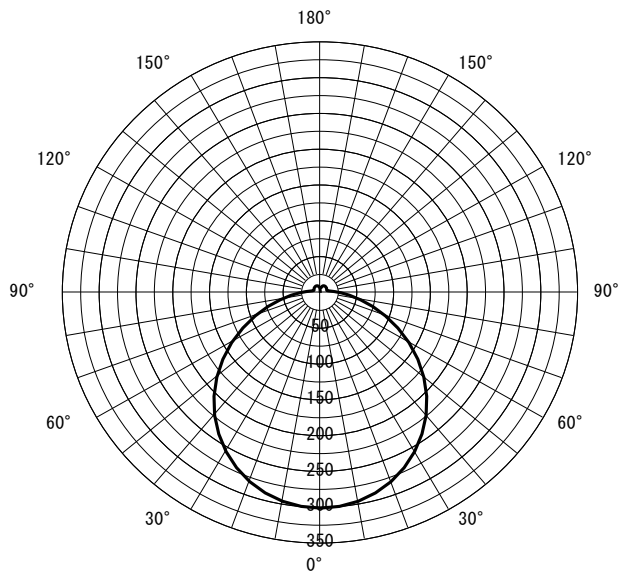

○直射水平面照度 (全光束: 1060 × 1 = 1060lm/台)

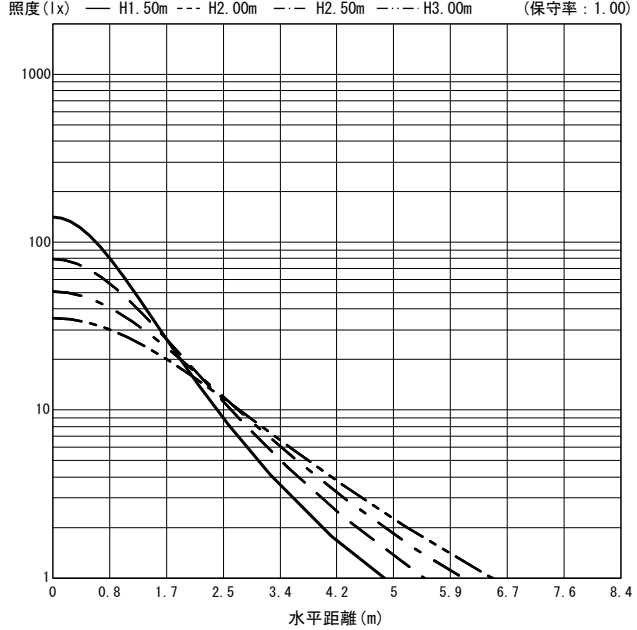

反射率 (%)																																		
天井	80								70				50				30				20	0												
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	作業面照度率 (× 0.01)																																	
0.60	60	55	45	43	36	35	30	30	58	54	44	42	36	35	30	30	54	51	42	41	35	34	29	29	50	48	40	39	34	33	29	28	28	26
0.80	72	65	57	53	47	46	41	40	69	63	55	52	47	45	40	39	64	60	53	50	45	44	39	39	59	56	50	48	43	42	38	38	37	35
1.00	80	72	65	61	56	53	49	47	77	69	64	59	55	52	48	46	71	66	60	57	52	50	46	45	66	62	57	55	50	49	45	44	44	41
1.25	87	77	74	67	64	60	57	54	84	75	71	66	63	59	56	54	77	71	67	63	60	57	54	52	71	67	63	61	57	55	52	51	50	48
1.50	93	82	80	72	70	65	63	60	89	79	77	71	69	64	62	59	82	75	72	68	65	62	60	57	75	71	68	65	62	60	57	56	55	52
2.00	100	87	89	79	80	73	73	68	96	85	86	78	78	72	71	67	88	80	80	74	74	69	68	65	81	76	75	71	70	67	65	63	63	60
2.50	105	91	95	84	87	78	80	73	100	88	92	82	84	77	78	72	92	84	85	79	79	74	74	70	85	80	79	75	75	72	71	68	67	64
3.00	109	93	100	87	92	82	86	78	104	91	96	85	89	81	84	77	95	86	89	82	84	78	79	74	88	82	83	79	79	75	75	72	71	68
4.00	113	96	106	92	99	87	94	84	108	94	102	90	96	86	91	82	99	90	94	86	90	83	86	80	91	86	87	83	84	80	81	77	76	73
5.00	116	98	110	94	104	91	99	87	111	96	105	92	100	89	96	86	101	92	97	89	93	86	90	83	93	88	90	85	87	83	84	81	79	76
7.00	120	101	115	98	110	95	106	92	114	98	110	96	106	93	102	91	104	94	101	92	98	90	95	88	96	90	94	88	91	86	89	85	83	80
10.00	122	102	119	100	115	98	112	96	117	100	114	98	111	96	108	94	107	96	104	94	102	93	100	91	98	92	96	91	95	89	93	88	87	83

JIS C 8030:2014

三菱電機照明株式会社