



形名	EL-WC1003N AHN	電源	
出力	固定出力	温度	
モード			
オプション1			
オプション2			
オプション3			
オプション4			
オプション5			



○配光曲線図 (cd/1000lm)

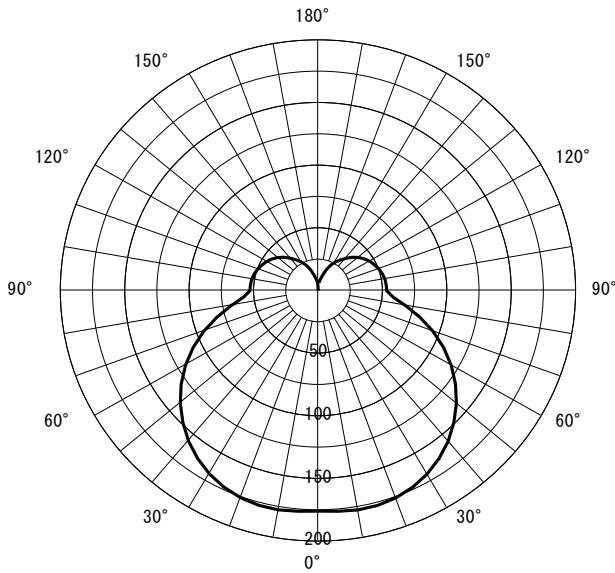


○諸特性

光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.4 H					
	B-B'	1.4 H					
器具効率		上方光束	下方光束	計			
		26.3%	73.7%	100.0%			
保守率		良い	0.690	普通	0.670	悪い	0.630

○直射水平面照度

(全光束 : 1030 × 1 = 1030lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

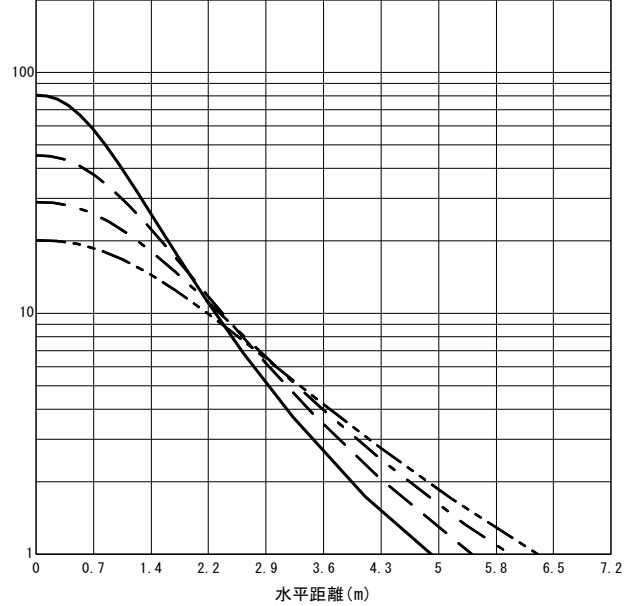

反射率 (%)

天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照明率 (× 0.01)																																	
0.60	54	50	40	38	31	30	24	24	51	47	38	36	29	29	24	23	45	42	34	33	27	26	22	22	40	38	31	30	25	24	20	20	19	17
0.80	65	59	50	47	41	39	34	33	61	56	48	45	39	37	33	32	54	50	43	41	36	35	30	30	47	45	39	37	33	32	28	28	27	23
1.00	73	66	58	54	48	46	41	40	68	62	55	52	46	44	39	38	60	56	50	47	42	41	36	36	53	50	44	43	38	37	34	33	32	28
1.25	80	71	66	61	56	53	49	46	75	68	63	58	54	51	47	45	66	61	56	53	49	47	43	42	58	54	50	48	44	43	39	39	37	33
1.50	86	75	72	66	62	58	55	52	80	72	68	63	59	56	53	50	70	64	61	57	54	51	48	46	61	58	54	52	49	47	44	43	41	36
2.00	93	81	81	73	72	66	65	60	87	77	77	69	68	63	62	58	76	69	68	63	62	58	56	54	66	62	60	57	55	53	51	50	48	42
2.50	98	85	88	77	79	71	72	66	92	81	82	74	75	68	68	63	80	73	73	67	67	63	62	59	70	66	65	61	60	58	56	54	52	46
3.00	102	87	92	81	84	75	78	70	95	83	87	77	80	72	74	68	83	75	77	71	71	66	67	63	72	68	68	64	64	61	60	58	55	50
4.00	107	91	99	85	92	81	86	76	100	87	93	82	87	77	81	73	87	79	82	75	77	71	73	68	76	71	72	68	68	65	65	63	60	54
5.00	110	93	103	88	97	84	91	80	102	89	96	85	91	81	86	77	89	81	85	77	81	74	77	71	78	73	75	71	72	68	69	66	63	57
7.00	113	95	108	92	103	89	99	86	106	91	101	88	97	85	93	82	92	83	89	81	86	78	83	76	81	76	78	74	76	72	74	70	67	61
10.00	116	97	112	95	109	92	105	90	109	93	105	91	102	89	99	86	95	85	92	83	90	82	87	80	83	78	81	76	79	75	77	73	70	64

JIS C 8030:2014

三菱電機照明株式会社