


| | | | | |
|--------|--------------|----|--|------|
| 形名 | EL-WCE17306C | 電源 | | ○諸特性 |
| 出力 | 連調単色 | 温度 | | |
| モード | | | | |
| オプション1 | | | | |
| オプション2 | | | | |
| オプション3 | | | | |
| オプション4 | | | | |
| オプション5 | | | | |




| | | | | | | | |
|----------------|------|--------------------|-------|-------|-------|----|-------|
| 光源 | | LDA5L-G-E17/40/D/S | | | | | |
| 最大 取付 間隔 | 高さ | H | | | | | |
| | A-A' | 1.3 H | | | | | |
| | B-B' | 1.3 H | | | | | |
| 器具効率 | | 上方光束 | 下方光束 | 計 | | | |
| | | 7.8% | 36.1% | 43.9% | | | |
| 保守率 | | 良い | 0.680 | 普通 | 0.660 | 悪い | 0.630 |

○配光曲線図 (cd/1000lm)

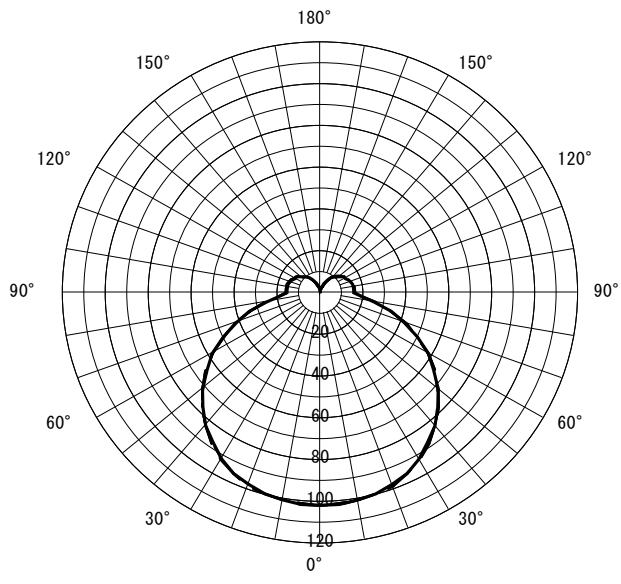

○直射水平面照度 (全光束 : 440 × 3 = 1320lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

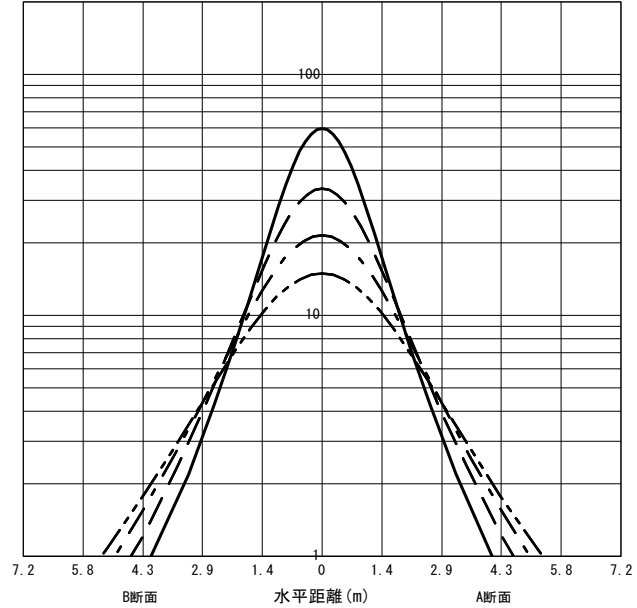

| 反射率 (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 20 | 0 | | | | | | | | | | | | | | | | |
| 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 10 | 0 | | | | | | | | | | | | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 | | |
| 室指数 | 作業面照明率 (× 0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.60 | 25 | 23 | 19 | 18 | 15 | 14 | 12 | 12 | 24 | 22 | 18 | 17 | 14 | 14 | 12 | 11 | 22 | 20 | 17 | 16 | 13 | 13 | 11 | 11 | 20 | 19 | 15 | 15 | 13 | 12 | 11 | 11 | 10 | 9 |
| 0.80 | 30 | 27 | 23 | 22 | 19 | 18 | 16 | 16 | 28 | 26 | 23 | 21 | 19 | 18 | 16 | 16 | 26 | 24 | 21 | 20 | 18 | 17 | 15 | 15 | 23 | 22 | 19 | 19 | 16 | 16 | 14 | 14 | 14 | 13 |
| 1.00 | 33 | 30 | 27 | 25 | 23 | 22 | 20 | 19 | 32 | 29 | 26 | 24 | 22 | 21 | 19 | 18 | 29 | 26 | 24 | 23 | 21 | 20 | 18 | 18 | 26 | 24 | 22 | 21 | 19 | 19 | 17 | 17 | 16 | 15 |
| 1.25 | 37 | 33 | 31 | 28 | 26 | 25 | 23 | 22 | 35 | 31 | 29 | 27 | 25 | 24 | 22 | 22 | 31 | 29 | 27 | 25 | 24 | 23 | 21 | 21 | 28 | 27 | 25 | 24 | 22 | 21 | 20 | 20 | 19 | 17 |
| 1.50 | 39 | 34 | 33 | 30 | 29 | 27 | 26 | 24 | 37 | 33 | 32 | 29 | 28 | 26 | 25 | 24 | 33 | 30 | 29 | 27 | 26 | 25 | 24 | 23 | 30 | 28 | 27 | 26 | 24 | 23 | 22 | 22 | 21 | 19 |
| 2.00 | 42 | 37 | 37 | 33 | 33 | 30 | 30 | 28 | 40 | 35 | 36 | 32 | 32 | 30 | 29 | 27 | 36 | 33 | 32 | 30 | 30 | 28 | 27 | 26 | 32 | 30 | 30 | 28 | 27 | 26 | 25 | 25 | 24 | 22 |
| 2.50 | 45 | 38 | 40 | 35 | 36 | 33 | 33 | 31 | 42 | 37 | 38 | 34 | 35 | 32 | 32 | 30 | 38 | 34 | 35 | 32 | 32 | 30 | 30 | 28 | 34 | 32 | 32 | 30 | 29 | 28 | 28 | 27 | 26 | 24 |
| 3.00 | 46 | 40 | 42 | 37 | 39 | 35 | 36 | 33 | 44 | 38 | 40 | 36 | 37 | 34 | 35 | 32 | 39 | 35 | 36 | 33 | 34 | 32 | 32 | 30 | 35 | 33 | 33 | 31 | 31 | 30 | 30 | 28 | 28 | 26 |
| 4.00 | 48 | 41 | 45 | 39 | 42 | 37 | 40 | 35 | 46 | 40 | 43 | 38 | 40 | 36 | 38 | 34 | 41 | 37 | 39 | 35 | 37 | 34 | 35 | 32 | 37 | 34 | 35 | 33 | 33 | 32 | 32 | 31 | 30 | 28 |
| 5.00 | 50 | 42 | 47 | 40 | 44 | 38 | 42 | 37 | 47 | 41 | 44 | 39 | 42 | 37 | 40 | 36 | 42 | 38 | 40 | 36 | 38 | 35 | 37 | 34 | 37 | 35 | 36 | 34 | 35 | 33 | 34 | 32 | 31 | 29 |
| 7.00 | 51 | 43 | 49 | 42 | 47 | 40 | 45 | 39 | 48 | 42 | 46 | 40 | 45 | 39 | 43 | 38 | 43 | 39 | 42 | 38 | 40 | 37 | 39 | 36 | 39 | 36 | 38 | 35 | 37 | 35 | 36 | 34 | 33 | 31 |
| 10.00 | 52 | 44 | 51 | 43 | 49 | 42 | 48 | 41 | 49 | 42 | 48 | 41 | 47 | 41 | 45 | 40 | 44 | 40 | 43 | 39 | 42 | 38 | 41 | 37 | 40 | 37 | 39 | 37 | 38 | 36 | 37 | 35 | 34 | 32 |

JIS C 8030:2014

三菱電機照明株式会社