


形名	EL-WCG5300L/K	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDF4LHGX53/C7/400					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		5.7%	53.3%	59.0%			
保守率		良い	0.680	普通	0.660	悪い	0.630

○配光曲線図 (cd/1000lm)

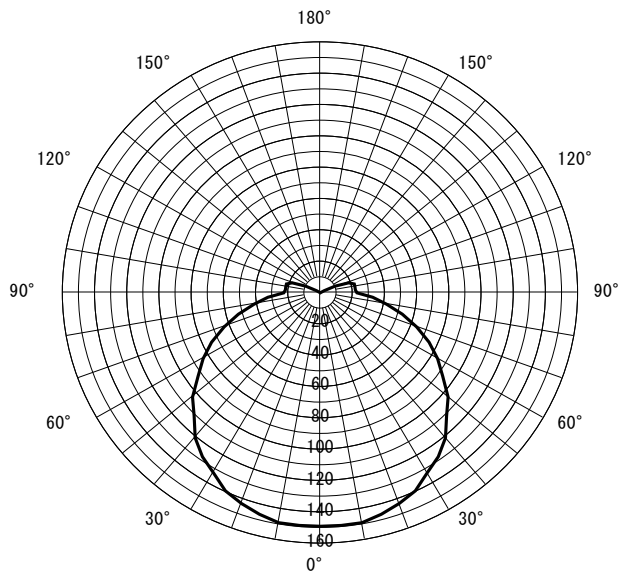

○直射水平面照度 (全光束: 410 × 1 = 410lm/台)

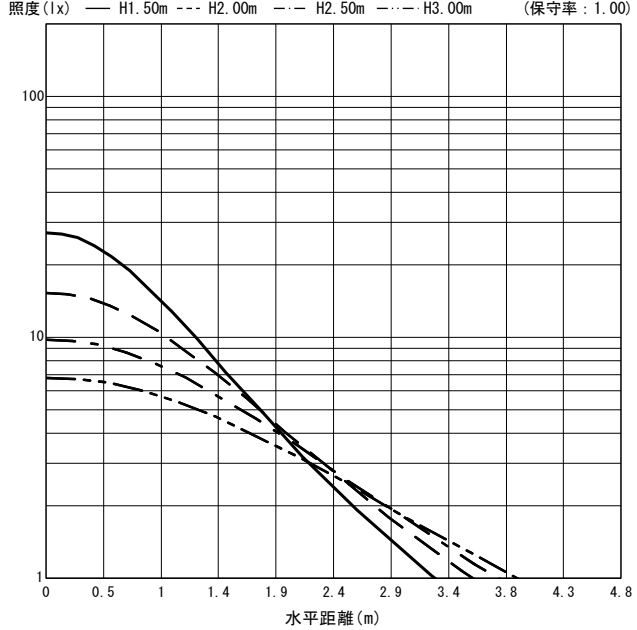

反射率 (%)																																		
天井	80				70				50				30				20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	0													
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0													
室指数	作業面照度 (× 0.01)																																	
0.60	34	31	25	24	20	19	16	16	33	30	25	23	19	19	16	16	30	28	23	22	19	18	15	15	28	27	22	21	18	18	15	15	15	13
0.80	41	37	32	30	26	25	22	21	39	36	31	29	25	25	22	21	36	33	29	28	24	24	21	21	33	31	27	26	23	23	20	20	20	18
1.00	46	41	37	34	31	29	26	26	43	39	36	33	30	29	26	25	40	37	33	32	29	28	25	24	37	35	31	30	27	27	24	24	23	22
1.25	50	44	42	38	36	33	31	30	48	43	40	37	35	33	31	29	44	40	37	35	33	32	29	28	40	38	35	34	31	30	28	28	27	25
1.50	53	47	45	41	39	37	35	33	51	45	44	40	38	36	34	32	46	42	41	38	36	34	33	31	42	40	38	36	34	33	31	31	30	28
2.00	58	50	51	45	45	41	41	38	55	49	49	44	44	40	40	37	50	46	45	42	41	39	38	36	46	43	42	40	39	37	36	35	34	32
2.50	61	52	54	48	49	44	45	41	58	51	52	47	48	44	44	41	53	48	48	45	45	42	41	39	48	45	45	42	42	40	39	38	37	35
3.00	63	54	57	50	53	47	49	44	60	52	55	49	51	46	47	43	54	49	51	47	47	44	44	42	50	47	47	44	44	42	42	40	40	37
4.00	66	56	61	53	57	50	54	48	63	54	58	52	55	49	52	47	57	52	54	49	51	47	48	45	52	49	50	47	47	45	45	43	43	41
5.00	68	57	64	55	60	52	57	50	64	56	61	53	58	51	55	49	58	53	56	51	53	49	51	47	53	50	51	48	49	47	48	46	45	43
7.00	70	59	67	57	64	55	61	53	66	57	64	55	61	54	59	52	60	54	58	53	56	51	55	50	55	52	54	50	52	49	51	48	47	45
10.00	71	60	69	58	67	57	65	56	68	58	66	57	64	56	62	54	62	56	60	54	59	53	57	52	57	53	55	52	54	51	53	50	49	47

JIS C 8030:2014

三菱電機照明株式会社