


|        |                  |    |  |      |
|--------|------------------|----|--|------|
| 形名     | EL-WV1010N/K AHN | 電源 |  | ○諸特性 |
| 出力     | 固定出力             | 温度 |  |      |
| モード    |                  |    |  |      |
| オプション1 |                  |    |  |      |
| オプション2 |                  |    |  |      |
| オプション3 |                  |    |  |      |
| オプション4 |                  |    |  |      |
| オプション5 |                  |    |  |      |




|                |      |       |        |        |       |    |       |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源             |      | LED   |        |        |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |        |        |       |    |       |
|                | A-A' | 1.2 H |        |        |       |    |       |
|                | B-B' | 1.2 H |        |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束   | 計      |       |    |       |
|                |      | 0.0%  | 100.0% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.830  | 普通     | 0.800 | 悪い | 0.760 |

○配光曲線図 (cd/1000lm)

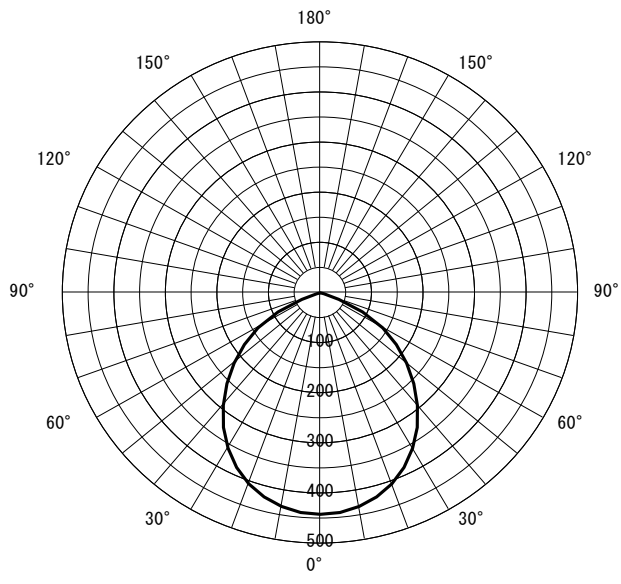

○直射水平面照度 (全光束 : 930 × 1 = 930lm/台)

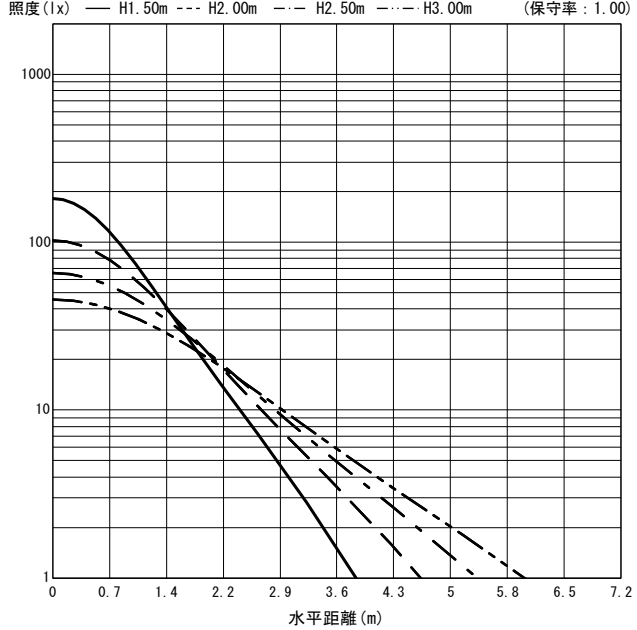

| 反射率 (%) |                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |    |     |    |    |    |  |  |  |  |  |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|-----|----|-----|----|----|----|--|--|--|--|--|
| 天井      | 80              |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |    | 30  |     |     |    |     |    |     |    | 20 | 0  |  |  |  |  |  |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10 | 70  | 50  | 30  | 10 | 10  | 0  |     |    |    |    |  |  |  |  |  |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 30  | 10  | 30  | 10 | 30  | 10 | 30  | 10 | 10 | 0  |  |  |  |  |  |
| 室指数     | 作業面照度率 (× 0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |     |     |    |     |    |     |    |    |    |  |  |  |  |  |
| 0.60    | 68              | 62  | 54  | 51  | 45  | 44  | 40  | 39  | 66  | 61  | 53  | 51  | 45  | 44  | 40  | 39  | 63  | 59  | 52  | 50  | 44  | 43  | 39  | 39 | 60  | 57  | 50  | 49 | 44  | 43 | 39  | 39 | 39 | 37 |  |  |  |  |  |
| 0.80    | 80              | 73  | 67  | 63  | 58  | 56  | 52  | 51  | 78  | 71  | 66  | 62  | 58  | 56  | 52  | 51  | 74  | 69  | 64  | 61  | 57  | 55  | 51  | 50 | 71  | 67  | 62  | 60 | 56  | 54 | 51  | 50 | 50 | 48 |  |  |  |  |  |
| 1.00    | 89              | 80  | 76  | 70  | 67  | 64  | 61  | 59  | 86  | 78  | 75  | 70  | 67  | 64  | 61  | 59  | 82  | 76  | 72  | 68  | 65  | 63  | 60  | 59 | 78  | 73  | 70  | 67 | 64  | 62 | 59  | 58 | 58 | 56 |  |  |  |  |  |
| 1.25    | 96              | 85  | 85  | 77  | 76  | 72  | 70  | 67  | 93  | 84  | 83  | 77  | 75  | 71  | 69  | 67  | 88  | 81  | 80  | 75  | 73  | 70  | 68  | 66 | 84  | 79  | 77  | 74 | 71  | 69 | 67  | 66 | 65 | 64 |  |  |  |  |  |
| 1.50    | 101             | 89  | 91  | 82  | 83  | 77  | 77  | 72  | 98  | 88  | 89  | 81  | 81  | 76  | 76  | 72  | 93  | 85  | 85  | 80  | 79  | 75  | 74  | 71 | 88  | 83  | 82  | 78 | 77  | 74 | 72  | 71 | 71 | 69 |  |  |  |  |  |
| 2.00    | 108             | 94  | 99  | 89  | 92  | 84  | 86  | 80  | 105 | 93  | 97  | 88  | 90  | 83  | 85  | 80  | 99  | 90  | 92  | 86  | 87  | 82  | 83  | 79 | 93  | 88  | 88  | 84 | 84  | 81 | 80  | 78 | 78 | 76 |  |  |  |  |  |
| 2.50    | 113             | 97  | 105 | 93  | 98  | 88  | 93  | 85  | 109 | 96  | 102 | 92  | 96  | 88  | 91  | 85  | 102 | 93  | 97  | 90  | 92  | 86  | 88  | 84 | 97  | 91  | 92  | 88 | 89  | 85 | 85  | 83 | 82 | 80 |  |  |  |  |  |
| 3.00    | 116             | 99  | 109 | 95  | 103 | 92  | 98  | 89  | 112 | 98  | 106 | 94  | 100 | 91  | 96  | 88  | 105 | 95  | 100 | 92  | 96  | 89  | 92  | 87 | 99  | 93  | 95  | 90 | 92  | 88 | 89  | 86 | 85 | 83 |  |  |  |  |  |
| 4.00    | 120             | 102 | 114 | 99  | 109 | 96  | 105 | 93  | 115 | 100 | 110 | 97  | 106 | 95  | 102 | 93  | 108 | 98  | 104 | 95  | 101 | 93  | 98  | 91 | 102 | 96  | 99  | 93 | 96  | 92 | 94  | 90 | 89 | 87 |  |  |  |  |  |
| 5.00    | 122             | 103 | 117 | 101 | 113 | 98  | 109 | 96  | 118 | 102 | 113 | 99  | 110 | 97  | 106 | 95  | 110 | 99  | 107 | 97  | 104 | 96  | 101 | 94 | 103 | 97  | 101 | 95 | 99  | 94 | 97  | 92 | 92 | 90 |  |  |  |  |  |
| 7.00    | 125             | 105 | 121 | 103 | 118 | 101 | 115 | 99  | 120 | 103 | 117 | 102 | 114 | 100 | 112 | 99  | 112 | 101 | 110 | 100 | 108 | 98  | 106 | 97 | 105 | 99  | 103 | 98 | 102 | 96 | 100 | 95 | 95 | 93 |  |  |  |  |  |
| 10.00   | 127             | 106 | 124 | 105 | 122 | 103 | 119 | 102 | 122 | 105 | 120 | 103 | 118 | 102 | 116 | 101 | 114 | 102 | 112 | 101 | 110 | 100 | 109 | 99 | 107 | 100 | 105 | 99 | 104 | 98 | 103 | 98 | 97 | 95 |  |  |  |  |  |

JIS C 8030:2014

三菱電機照明株式会社