


形名	EL-WVE1705C	電源	
出力	固定出力	温度	
モード			
オプション1			
オプション2			
オプション3			
オプション4			
オプション5			



○配光曲線図 (cd/1000lm)

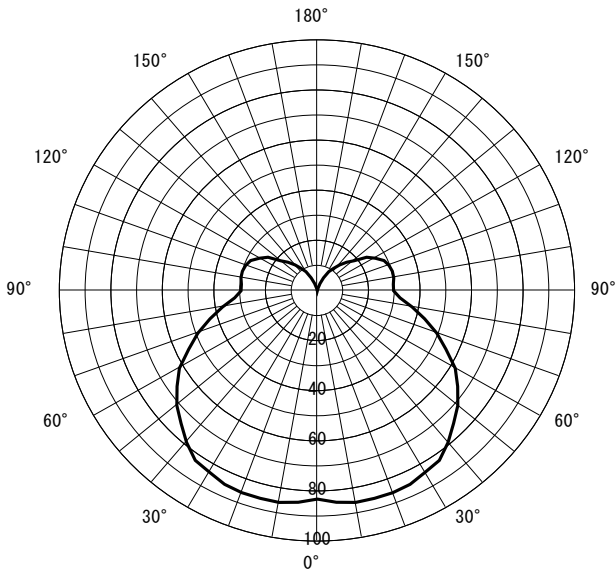


○諸特性

光源		LDA4L-G-E17/40/S-PS					
最大 取付 間隔	高さ	H					
	A-A'	1.5 H					
	B-B'	1.5 H					
器具効率		上方光束	下方光束	計			
		13.5%	37.6%	51.2%			
保守率		良い	0.680	普通	0.660	悪い	0.630

○直射水平面照度

(全光束 : 440 × 1 = 440lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - - H3.00m (保守率 : 1.00)

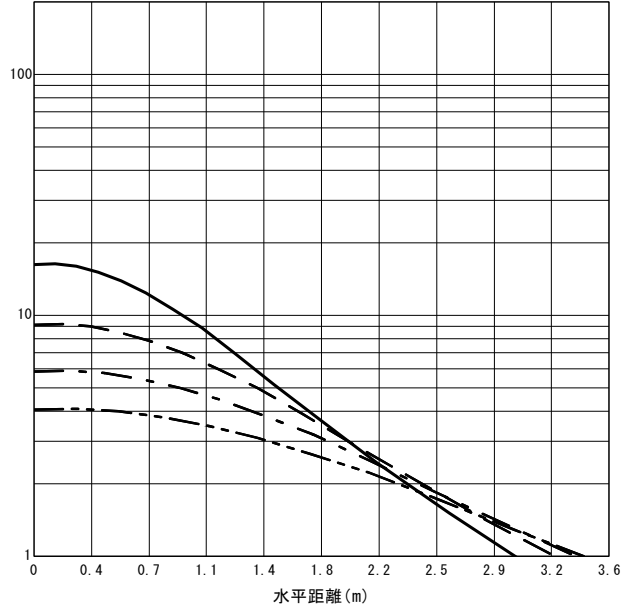

反射率 (%)																																										
天井	80								70				50				30				20	0																				
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	28	25	20	19	15	15	12	12	26	24	19	18	15	14	12	12	23	21	17	17	13	13	11	11	20	19	15	15	12	12	10	10	10	8								
0.80	33	30	25	24	20	20	17	16	31	28	24	23	20	19	16	16	27	25	22	21	18	17	15	15	24	23	20	19	16	16	14	14	13	11								
1.00	37	33	29	27	24	23	21	20	35	32	28	26	23	22	20	19	30	28	25	24	21	20	18	18	27	25	22	22	19	19	17	16	16	14								
1.25	41	36	34	31	28	27	24	23	38	34	32	29	27	26	24	23	33	31	28	27	25	23	22	21	29	27	25	24	22	22	20	19	19	16								
1.50	44	38	37	33	32	29	28	26	41	36	35	32	30	28	26	25	36	33	31	29	27	26	24	23	31	29	27	26	24	24	22	22	21	18								
2.00	47	41	41	37	37	33	33	30	44	39	39	35	35	32	31	29	39	35	35	32	31	29	28	27	34	32	31	29	28	27	26	25	24	21								
2.50	50	43	45	39	40	36	36	33	47	41	42	38	38	35	35	32	41	37	37	34	34	32	31	30	35	33	33	31	30	29	28	27	26	23								
3.00	52	45	47	41	43	38	39	36	48	42	44	39	40	37	37	34	42	38	39	36	36	34	34	32	37	35	34	33	32	31	30	29	28	25								
4.00	54	46	50	43	47	41	43	39	51	44	47	42	44	39	41	37	44	40	42	38	39	36	37	34	39	36	37	35	35	33	33	32	30	27								
5.00	56	47	52	45	49	43	46	41	52	45	49	43	46	41	44	39	46	41	43	39	41	38	39	36	40	37	38	36	36	35	35	33	32	29								
7.00	58	49	55	47	53	45	50	44	54	47	52	45	49	43	47	42	47	42	45	41	44	40	42	39	41	39	40	38	39	36	37	36	34	31								
10.00	59	50	57	48	55	47	53	46	56	48	54	46	52	45	50	44	48	44	47	43	46	42	45	41	42	40	41	39	40	38	39	37	36	32								

JIS C 8030:2014

三菱電機照明株式会社